

TN-15HP451

15" LF LOUDSPEAKER

1500W RMS capacity
114mm(4.5 in) inside-outside GPIICAW VC
46-2500Hz response
97 dB sensitivity
8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	15/385 in/mm
MAX Power	3000 Watts
RMS Power	1500 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	46 Hz
Frequency Response	46-2500 Hz
Sensitivity(1W/1m)	97 dB
Voice Coil Diameter	4.5"/114mm
Winding material	GPIICAW (inside-outside)
Magnet	200 Oz 254*127*30mm

MOUNTING/SHIPPING INFORMATION


Overall Diameter	15.5/395 in/mm
Bolt Circle Diameter	15/385 in/mm
Baffle cutout Diameter	14/360 in/mm
Depth	7.6/195 in/mm

Net Weight	16 kgs
Shipping Weight	17 kgs
Shipping Box	41X41X19cm


THIELE SMALL PARAMETERS

FS Hz	46 Hz
Vas	94 dm ³
RE Ohms	5.4 ohm
Qms	7
Qes	0.43
Qts	0.41
BL T/m	22 T/m
MMS(grms)	143 grams
Xmax(mm)	11.2 mm
Sd	900 cm ²
Efficiency %	2.5%
EBP	107

FREQUENCY RESPONSE DATA

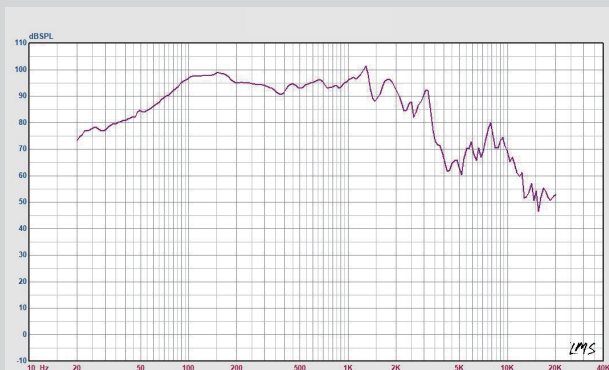

IMPEDANCE DATA

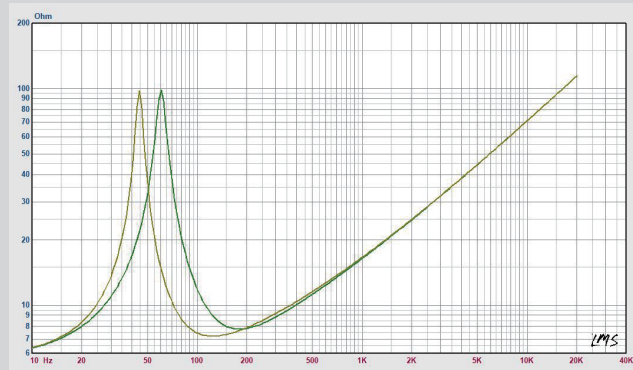

THE LF LOUDSPEAKER | TN-15HP451