

TN-15LF89

15" LF LOUDSPEAKER

800W RMS capacity
89mm(3.5 in) inside-outside PICCAW VC
50-3500Hz response
98.8dB sensitivity
8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	15/385 in/mm
MAX Power	1600 Watts
RMS Power	800 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	50 Hz
Frequency Response	50-3500 Hz
Sensitivity(1W/1m)	98.8 dB
Voice Coil Diameter	3.5"/89mm
Windling material	PICCAW (inside-outside)
Magnet	136 Oz 220X95X25mm

MOUNTING/SHIPPING INFORMATION


Overall Diameter	15.5/393 in/mm
Bolt Circle Diameter	14.8/375 in/mm
Baffle cutout Diameter	13.9/353 in/mm
Depth	7.1/180 in/mm

Net Weight	11.6 kgs
Shipping Weight	12 kgs
Shipping Box	40.5X40.5X20.5cm


THIELE SMALL PARAMETERS

FS Hz	50 Hz
Vas	140 dm ³
RE Ohms	5.4 ohm
Qms	8.2
Qes	0.35
Qts	0.34
BL T/m	19 T/m
MMS(grms)	79 grams
Xmax(mm)	5.7 mm
Sd	800 cm
Efficiency %	4.6 %
EBP	143

FREQUENCY RESPONSE DATA

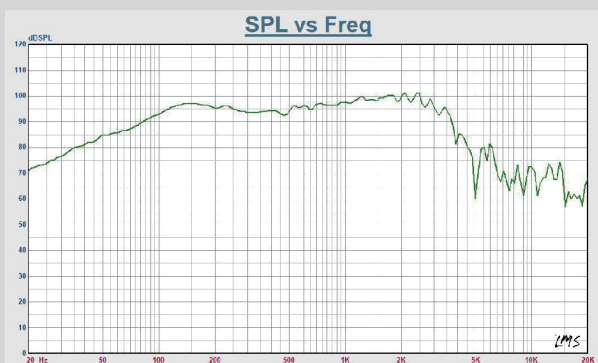

IMPEDANCE DATA

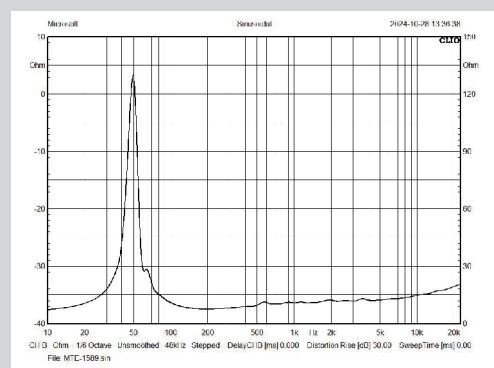

THE LF LOUDSPEAKER | TN-15LF89