

TN-15SW1280

15" LF LOUDSPEAKER

1500W RMS capacity
127mm(5 in) inside-outside GPI VC
45- 2500Hz response
96.5 dB sensitivity
8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	15/385 in/mm
MAX Power	3000 Watts
RMS Power	1500 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	45 Hz
Frequency Response	45-2500 Hz
Sensitivity(1W/1m)	96.5 dB
Voice Coil Diameter	5"/127mm
Windling material	GPI (inside-outside)
Magnet	205 Oz 280*140*25mm

MOUNTING/SHIPPING INFORMATION

Overall Diameter	15.4/392 in/mm
Bolt Circle Diameter	15/382 in/mm
Baffle cutout Diameter	14.2/360 in/mm
Depth	7.7/195 in/mm

Net Weight	20.2 kgs
Shipping Weight	22 kgs
Shipping Box	41X41X19cm


THIELE SMALL PARAMETERS

FS Hz	34 Hz
Vas	128 dm ³
RE Ohms	5.5 ohm
Qms	7.7
Qes	0.34
Qts	0.33
BL T/m	24 T/m
MMS(grms)	167 grams
Xmax(mm)	12.2 mm
Sd	850 cm ²
Efficiency %	2 %
EBP	100

FREQUENCY RESPONSE DATA



IMPEDANCE DATA

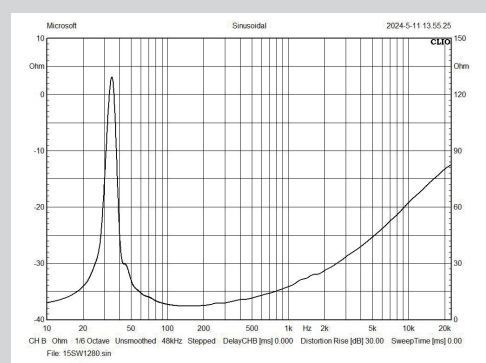

THE LF LOUDSPEAKER | TN-15SW1280



©Copyright ZTZ. • All rights reserved
www.ztzaudio.com