

18FW550

18" LF LOUDSPEAKER

2000W RMS capacity
140mm(5.5 in) inside-outside GPI VC
36-1200Hz response
97dB sensitivity
8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	18/460 in/mm
MAX Power	4000 Watts
RMS Power	2000 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	36 Hz
Frequency Response	36-1200 Hz
Sensitivity(1W/1m)	97 dB
Voice Coil Diameter	5.5/140 in/mm
Winding material	GPI(inside-outside)
Magnet	478 Oz 330X150X20mm(2PCS)

Net Weight	35.85 kgs
Shipping Weight	38.5 kgs
Shipping Box	50X50X28 cm


THIELE SMALL PARAMETERS

FS Hz	36 Hz
Vas	101 L
RE Ohms	5.2 ohm
Qms	12.7
Qes	0.23
Qts	0.22
BL T·m	45 T·m
MMS	402
Xmax(mm)	12.5 mm
Sd	1225 cm ²
Efficiency %	2.0 %
EBP	156


MOUNTING/SHIPPING INFORMATION

Overall Diameter	18.2/462 in/mm
Bolt Circle Diameter	17.5/445 in/mm
Baffle cutout Diameter	16.6/422 in/mm
Depth	9.4/240 in/mm

FREQUENCY RESPONSE DATA

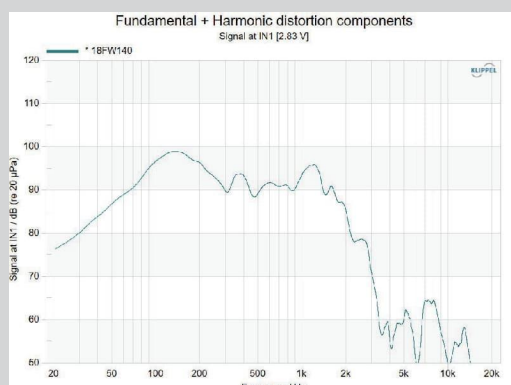

IMPEDANCE DATA

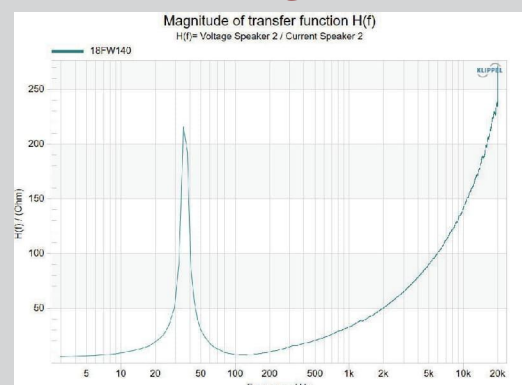

THE LF LOUDSPEAKER | 18FW550