

TN-21HW5500

21" LF LOUDSPEAKER

3000W RMS capacity
140mm(5.5 in) inside-outside SV VC
36.6-1000Hz response
98 dB sensitivity
8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	21/535 in/mm
MAX Power	6000 Watts
RMS Power	3000 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	36.6 Hz
Frequency Response	36.6-1000 Hz
Sensitivity(1W/1m)	98 dB
Voice Coil Diameter	5.5"/140mm
Winding material	SV (inside-outside)
Magnet	464 Oz 280X150X20 mm(3PCS)

MOUNTING/SHIPPING INFORMATION


Overall Diameter	21.6/550 in/mm
Bolt Circle Diameter	20.8/528 in/mm
Baffle cutout Diameter	19.5/496 in/mm
Depth	10.6/270 in/mm

Net Weight	31.5 kgs
Shipping Weight	32.5 kgs
Shipping Box	60X60X32.5cm


THIELE SMALL PARAMETERS

FS Hz	36.6 Hz
Vas	136.7 dm ³
RE Ohms	5.2 ohm
Qms	9.70
Qes	0.289
Qts	0.281
BL T/m	49.1 T/m
MMS(grms)	565.7 grams
Xmax(mm)	11.2 mm
Sd	1698.23 cm ²
Efficiency %	2.22 %
EBP	130

FREQUENCY RESPONSE DATA

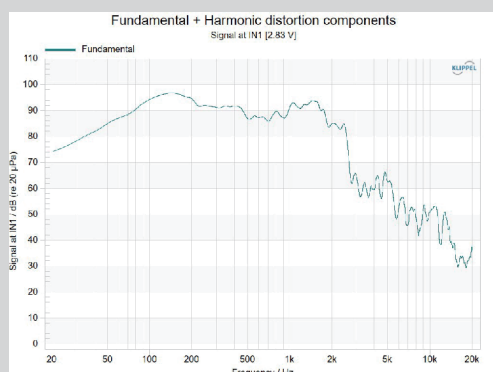

IMPEDANCE DATA

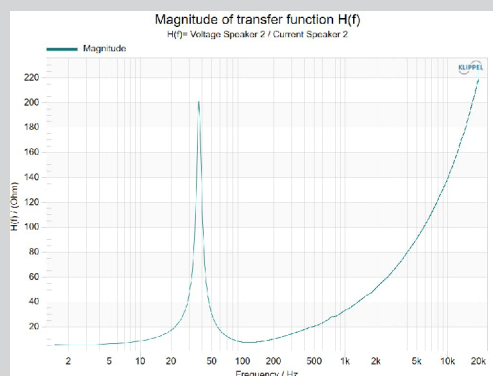

THE LF LOUDSPEAKER | TN-21HW5500