

TN-21HW6000

21" LF LOUDSPEAKER

3500W RMS capacity
152mm(6 in) inside-outside SV VC
37.4-1000Hz response
98 dB sensitivity
8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	21/535 in/mm
MAX Power	7000 Watts
RMS Power	3500 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	37.4 Hz
Frequency Response	37.4-1000 Hz
Sensitivity(1W/1m)	98 dB
Voice Coil Diameter	6"/152mm
Winding material	SV(inside-outside)
Magnet	663 Oz 330X170X20(3PCS)

MOUNTING/SHIPPING INFORMATION


Overall Diameter	21.6/550 in/mm
Bolt Circle Diameter	20.8/528 in/mm
Baffle cutout Diameter	19.5/496 in/mm
Depth	10.6/270 in/mm

Net Weight	40 kgs
Shipping Weight	42 kgs
Shipping Box	60X60X32.5cm


THIELE SMALL PARAMETERS

FS Hz	37.4 Hz
Vas	105 dm ³
RE Ohms	5.2 ohm
Qms	17.06
Qes	0.21
Qts	0.21
BL T/m	64.5 T/m
MMS(grms)	702 grams
Xmax(mm)	8.35 mm
Sd	1698.23 cm ²
Efficiency %	2.48 %
EBP	178

FREQUENCY RESPONSE DATA

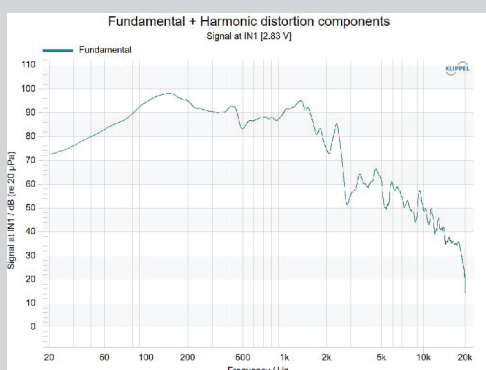

IMPEDANCE DATA

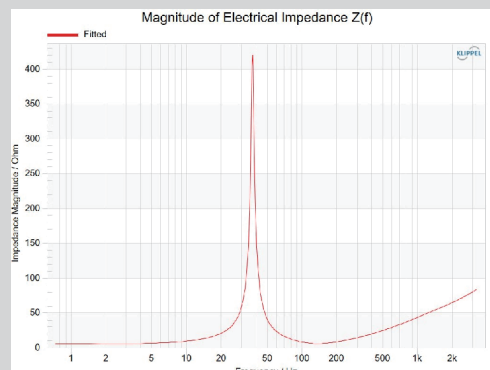

THE LF LOUDSPEAKER | TN-21HW6000