

TN-8HD300

8" LF LOUDSPEAKER

300W RMS capacity
75mm(3 in) inside-outside PICCAW VC
83-5000Hz response
94dB sensitivity
8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	8/250 in/mm
MAX Power	600 Watts
RMS Power	300 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	83 Hz
Frequency Response	83-5000 Hz
Sensitivity(1W/1m)	94 dB
Voice Coil Diameter	3/75 in/mm
Winding material	PICCAW(inside-outside)
Magnet	67 Oz 180X90X20 mm

MOUNTING/SHIPPING INFORMATION


Overall Diameter	8.9/226 in/mm
Bolt Circle Diameter	8.3/210 in/mm
Baffle cutout Diameter	7.1/181 in/mm
Depth	4.4/113 in/mm

Net Weight	6.45 kgs
Shipping Weight	7 kgs
Shipping Box	23.5X23.5X13.5 cm


THIELE SMALL PARAMETERS

FS Hz	83 Hz
Vas	7.1 dm ³
RE Ohms	4.7 ohm
Qms	4.9
Qes	0.36
Qts	0.34
BL T·m	14.2 T·m
MMS	31
Xmax(mm)	5.1 mm
Sd	208.6 cm ²
Efficiency %	1.0 %
EBP	230

FREQUENCY RESPONSE DATA

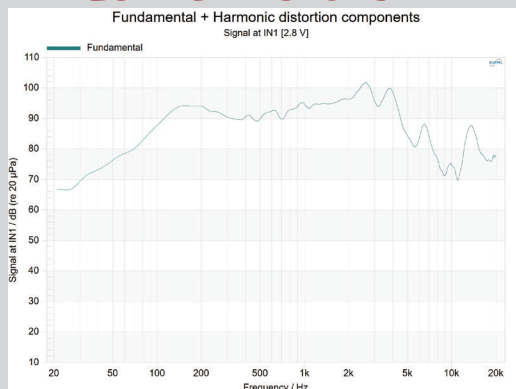

IMPEDANCE DATA

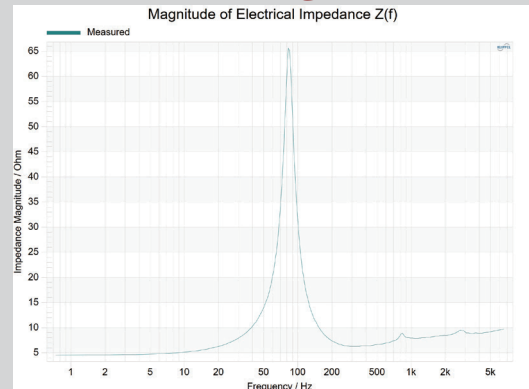

THE LF LOUDSPEAKER | TN-8HD300