

TN-8MD300

8" LF LOUDSPEAKER

300W RMS capacity

75mm(3 in) inside-outside PI VC

85-4200Hz response

96dB sensitivity

8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	8/205 in/mm
MAX Power	600 Watts
RMS Power	300 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	85 Hz
Frequency Response	85-4200 Hz
Sensitivity(1W/1m)	96 dB
Voice Coil Diameter	3/75 in/mm
Winding material	PI(inside-outside)
Magnet	75 Oz 170X85X25 mm

MOUNTING/SHIPPING INFORMATION


Overall Diameter	8.9/226 in/mm
Bolt Circle Diameter	8.3/210 in/mm
Baffle cutout Diameter	7.1/181 in/mm
Depth	4.4/112 in/mm

Net Weight	5.96/13.14 kgs
Shipping Weight	6.36/14.02 kgs
Shipping Box	24X24X15 cm 9.45X9.45X5.91 in


THIELE SMALL PARAMETERS

FS Hz	85 Hz
Vas	9.6 dm ³
RE Ohms	5.2 ohm
Qms	7.72
Qes	0.22
Qts	0.21
BL T·m	18.8 T·m
MMS	31.5
Xmax(mm)	2.1 mm
Sd(cm ²)	219 cm ²
Efficiency %	1.76 %
EBP	386

FREQUENCY RESPONSE DATA

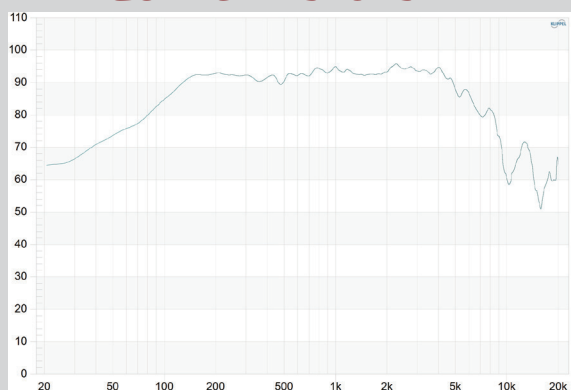

IMPEDANCE DATA

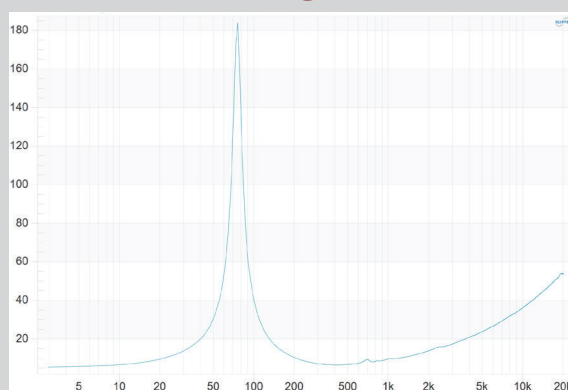

THE LF LOUDSPEAKER | TN-8MD300