NOTE: DRAFT — overlay not released: build and measure one harness on the first board before release (VALIDATE_FIRST_BOARD)
NOTE: dimension convention: point-to-point between node reference planes (default — confirm)

INSPECTION — IPC/WHMA-A-620 Class 2 (record on traveller)
1. tug test every crimped termination (spec pull values on the termination map)
2. secondary lock / wedgelock closed — visual, every connector
3. label text + position legible against this overlay
4. bend radius at folds and breakouts ≥ cable datasheet minimum
5. final length check against this overlay (tolerances per drawing)
6. program test: continuity

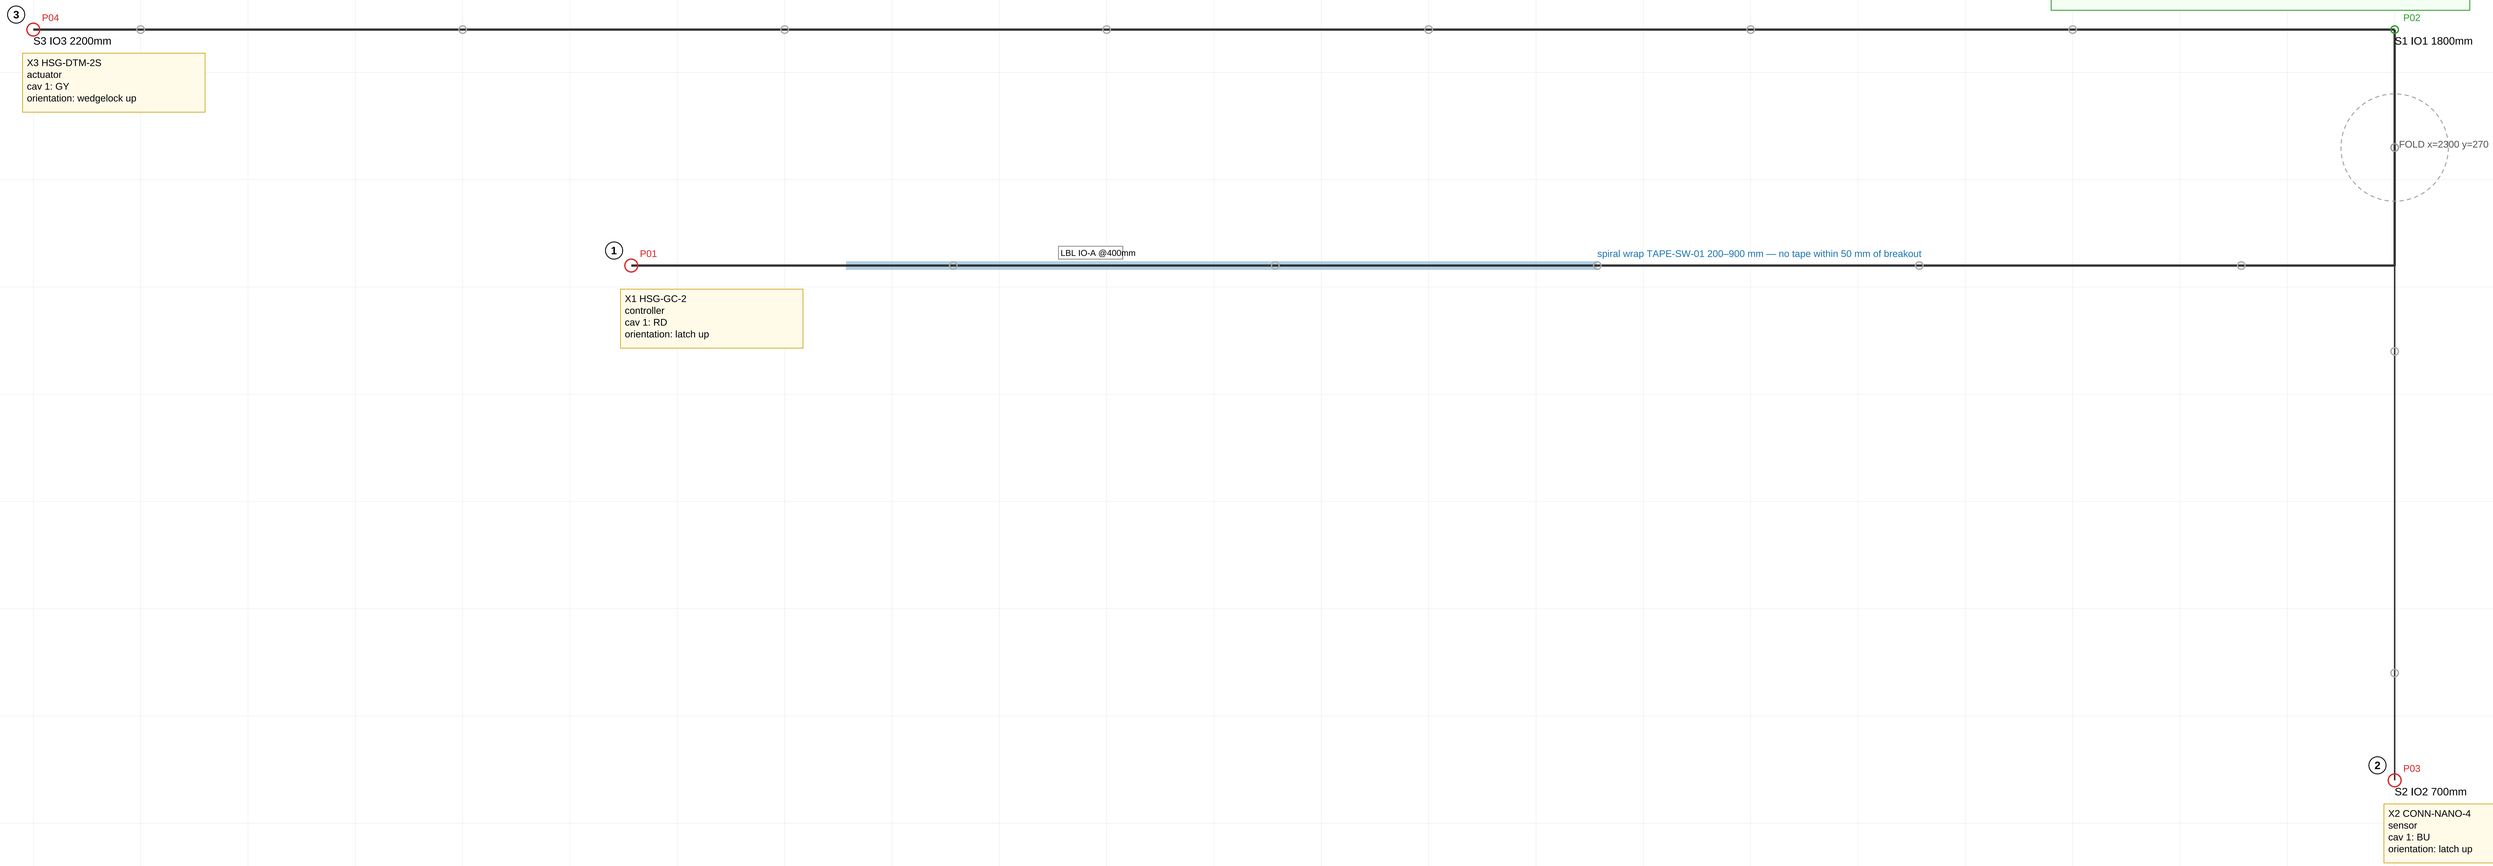

X3 HSG-DTM-2S
actuator
cav 1: GY
orientation: wedgelock up

X1 HSG-GC-2
controller
cav 1: RD
orientation: latch up

X2 CONN-NANO-4
sensor
cav 1: BU
orientation: latch up

customer drawing: D-1005 rev B
board overlay rev: B-B date: 2025-11-03
program: ETHDTM-2025
change summary: initial generation from data model

0 100 200 mm — SCALE 1:1