


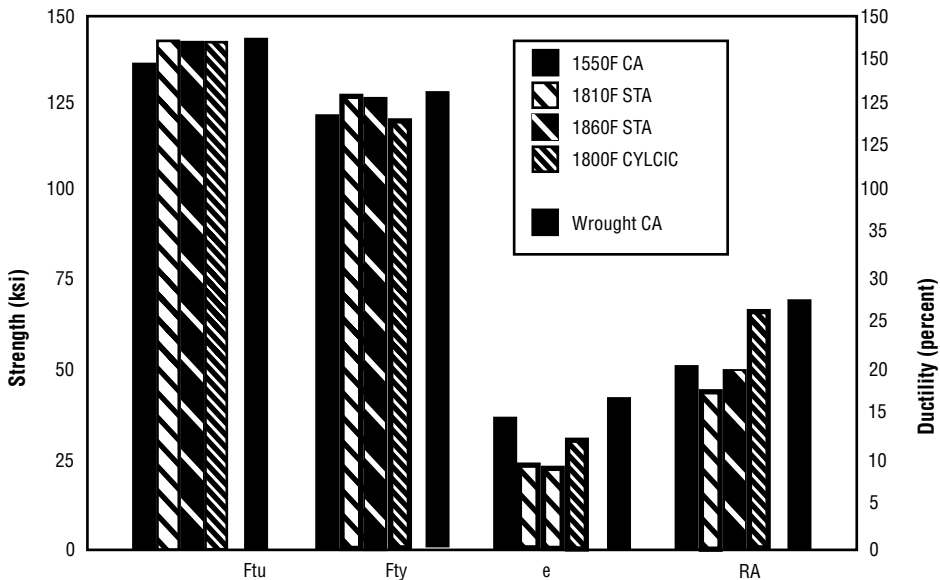

1550F CA

Conventional anneal at 1550F/2 hrs. in vacuum/argon fan cool

1810F STA

A "below beta" solution treatment and age, consisting of solution treatment at 1810F/1hr. in vacuum, an inert gas fan cool at a rate equivalent to air cooling (GFC)

1860F STA

An "above beta" solution treatment and age, consisting of 1860F/1 hr. in vacuum /GFC + 1000F/8hrs in vacuum/GFC

1800 Cyclic

A "below beta" cyclic exposure involving six cycles of 1800F/10 min in vacuum/GFC to 1000F/10 min. in vacuum/heat to 1800F, followed by a gas fan cool to 70F

Wrought CA

Conventional anneal applied to wrought products, 1550F/2 hrs.

Figure 3.2.1.19 Effect of thermal treatment on the 70F tensile properties of cast and HIP'ed Ti-6Al-4V alloy and the wrought alloy (Ref. 32)