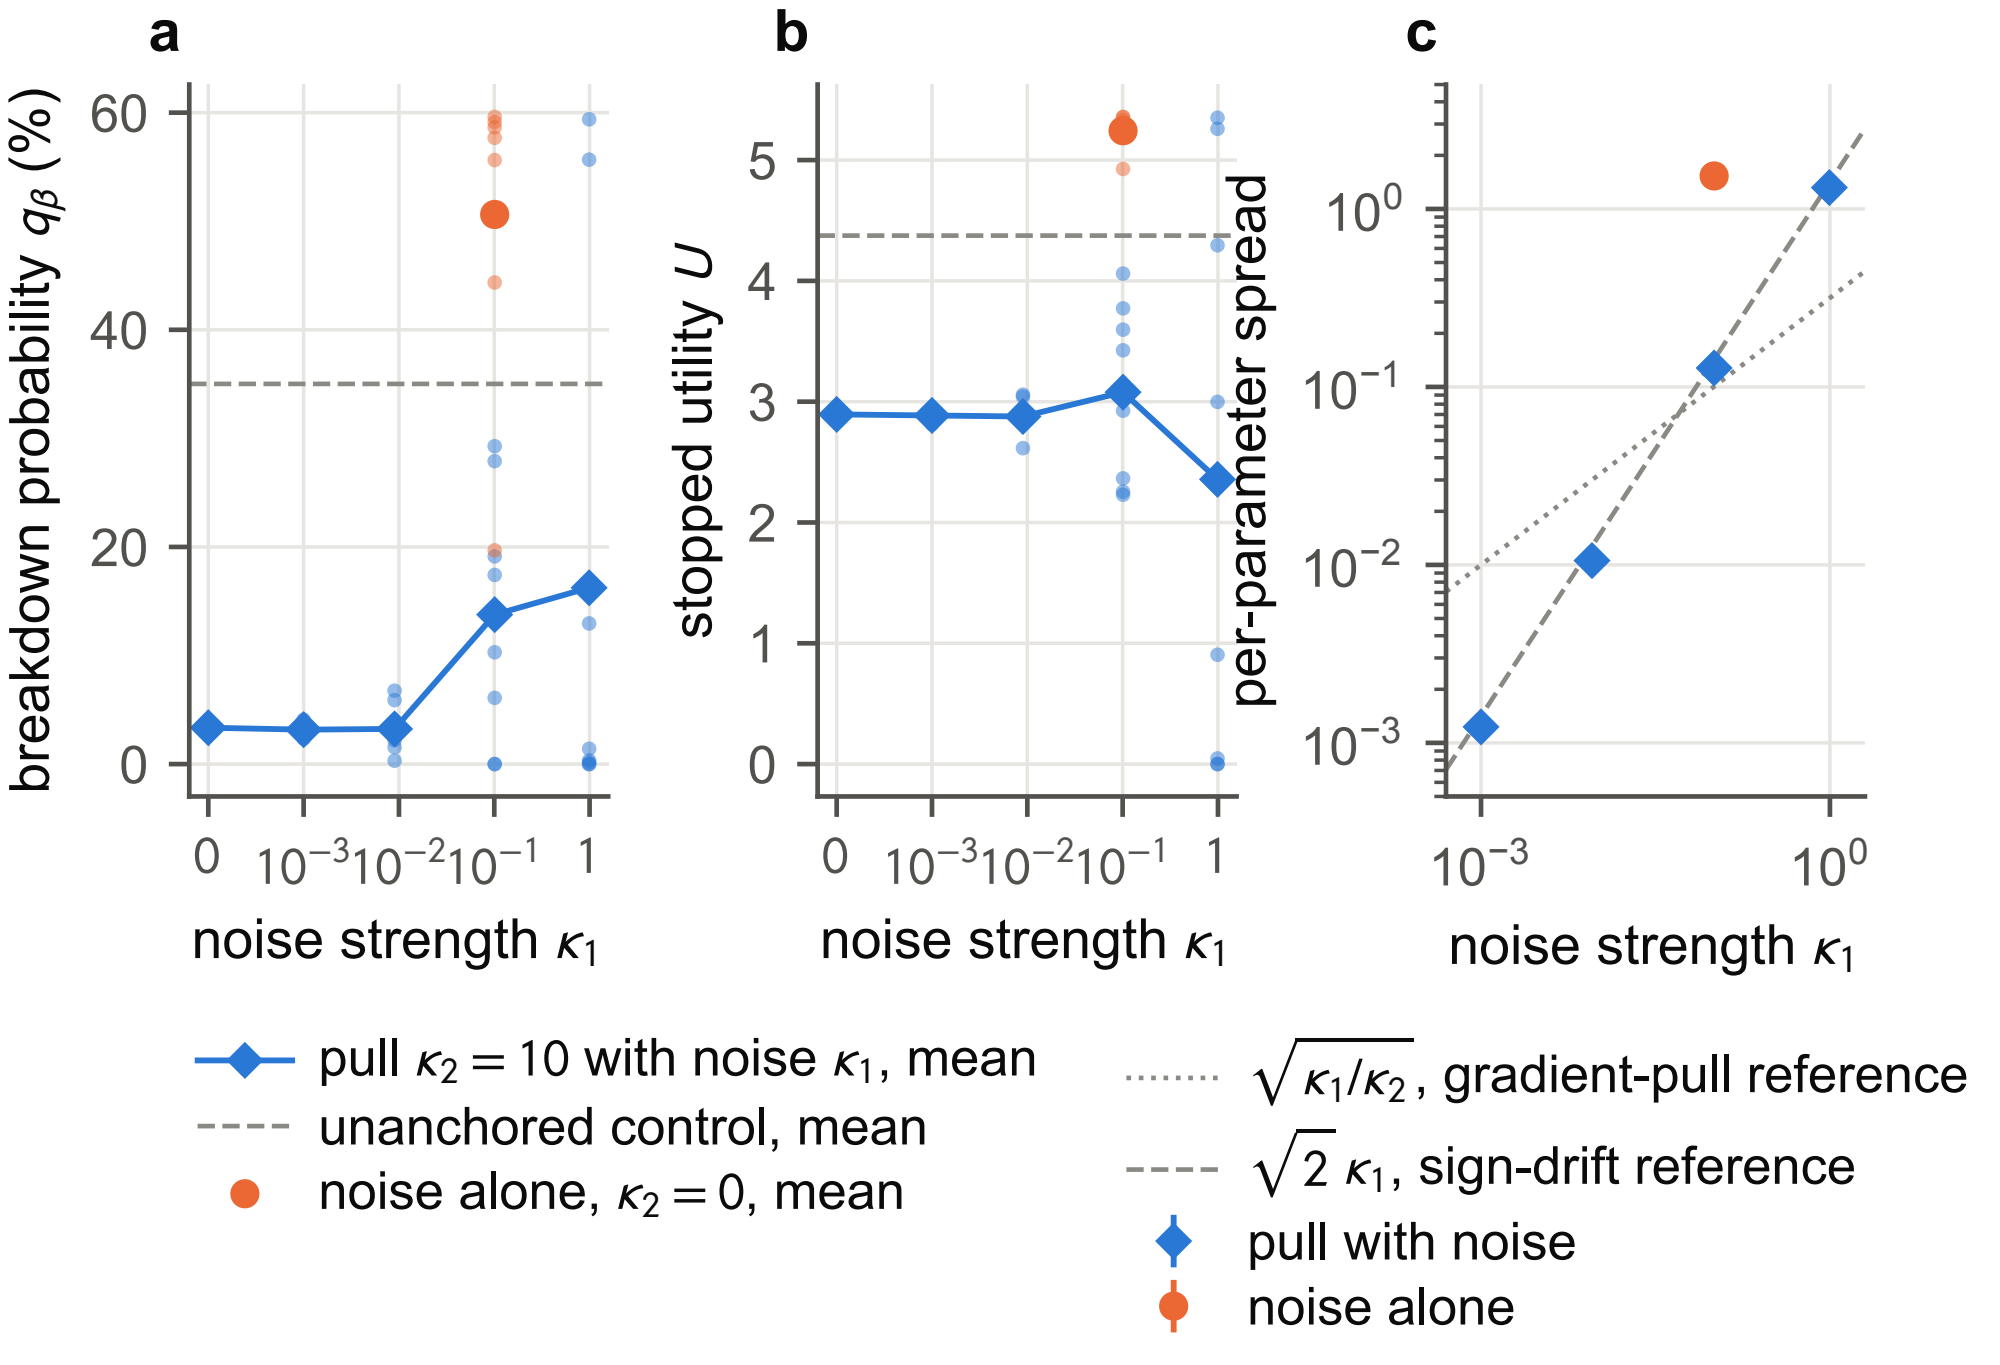
a
b
c
breakdown probability q_β (%)
stopped utility U
per-parameter spread
noise strength κ_1
noise strength κ_1
noise strength κ_1
pull $\kappa_2 = 10$ with noise κ_1, mean
unanchored control, mean
noise alone, $\kappa_2 = 0$, mean
$\sqrt{\kappa_1/\kappa_2}$, gradient-pull reference
$\sqrt{2}\,\kappa_1$, sign-drift reference
pull with noise
noise alone