
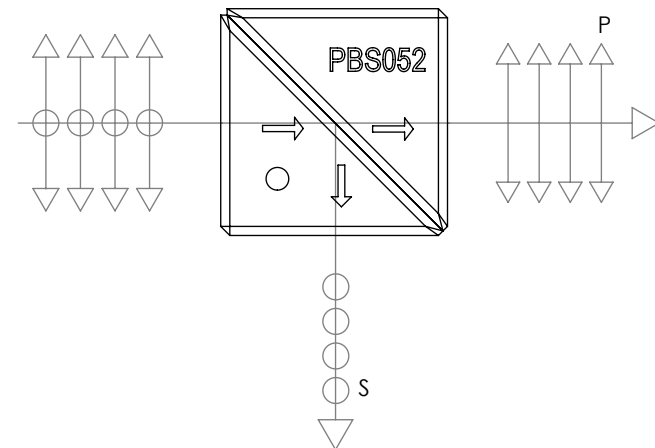



MARK A PENCIL DOT ON PRISM WITH
BEAMSPLITTER COATING INDICATING
RECOMMENDED ENTRANCE FACES



NOTES/SPECIFICATIONS

1. WAVELENGTH RANGE: 620-1000 nm
2. CLEAR APERTURE: >3.50 mm X 3.50 mm
3. TRANSMITTED WAVEFRONT ERROR: $<\lambda/4$ OVER $\varnothing$ 3.50 mm AT 633 nm
4. DIMENSIONAL TOLERANCE: +0.0/-0.2 mm
5. SURFACE QUALITY: 40-20 SCRATCH-DIG
6. TRANSMITTED BEAM DEVIATION: $0^\circ \pm 5$ arcmin
7. REFLECTED BEAM DEVIATION: $90^\circ \pm 5$ arcmin
8. OVERALL PERFORMANCE:
 - EXTINCTION RATIO: >1000:1
 - TRANSMISSION EFFICIENCY: $T_p > 90\%$
 - REFLECTION EFFICIENCY: $R_s \text{ avg} > 95\%$ (WITNESS SAMPLE)
9. COATING (ALL OUTER OPTICAL SURFACES): BBAR 620-1000 nm, $R_{\text{avg}} < 0.5\%$

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			 www.thorlabs.com	
DRAWN	NAME	DATE		
APPROVAL	DD	09/NOV/21	5 mm POLARIZING BEAMSPLITTER CUBE 620-1000 nm	
COPYRIGHT © 2021 BY THORLABS			MATERIAL	
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			N-SF1	
ITEM #			REV E	
PBS052			APPROX WEIGHT	
			0.4 g	