

Polarization transfer matrix


Ungated · 8/8 settings · completed

Detected rate (counts/s)


Conditional detection probability

Input state / Alice EOM target


^{S0}
Alice -165 V

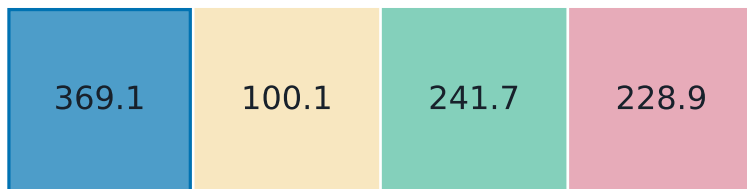

^{S2}
Alice +43 V

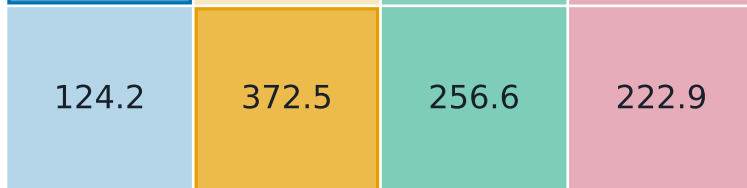

^{S1}
Alice -61 V

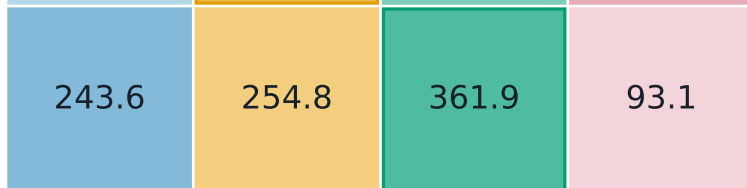

^{S3}
Alice +147 V



^{S0} · HV/CH2
Bob +30 V


^{S2} · HV/CH1
Bob +30 V

^{S1} · RL/CH2
Bob -68 V


^{S3} · RL/CH1
Bob -68 V

Output channel / Bob EOM target


^{S0}
Alice -165 V

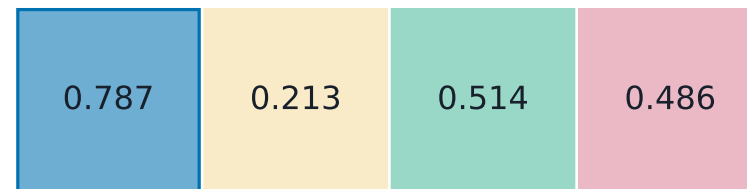


^{S2}
Alice +43 V

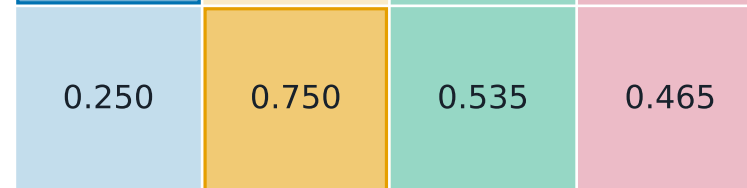

^{S1}
Alice -61 V

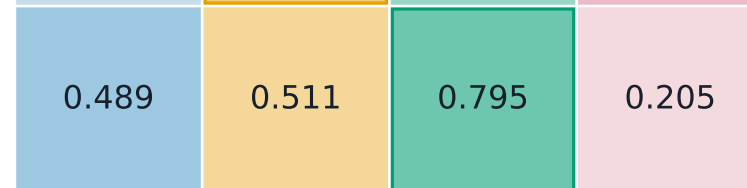

^{S3}
Alice +147 V

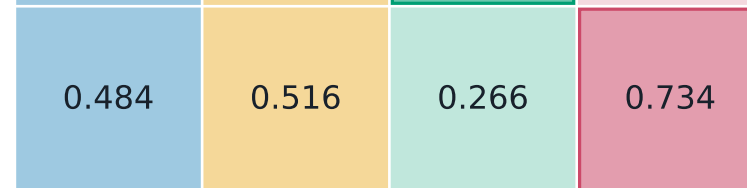

^{S0} · HV/CH2
Bob +30 V

^{S2} · HV/CH1
Bob +30 V

^{S1} · RL/CH2
Bob -68 V

^{S3} · RL/CH1
Bob -68 V

Output channel / Bob EOM target

Color identifies output channel; shade and numbers show measured values. Outlines mark expected unity outcomes.

Probabilities are normalized within each Bob basis. No background subtraction or detector-efficiency correction.

EOM targets: Alice/AO0, Bob/AO1. Plot order is saved in analysis.json; raw data and CSV matrix order are unchanged.