

Polarization transfer matrix

Gate: 50–100 ns · 8/8 settings · completed · H/R/V/L names provisional

Detected rate (counts/s)

Conditional detection probability


Input state / Alice EOM target

H (S0)
Alice -158.62 V

V (S2)
Alice +34.48 V

R (S1)
Alice -62.06 V

L (S3)
Alice +158.62 V

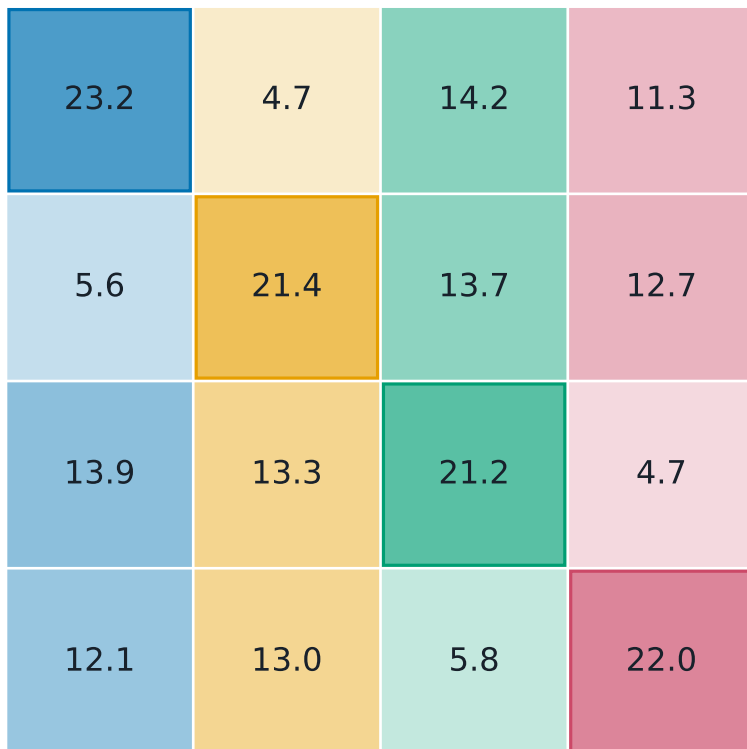

H (S0) · HV/CH2
Bob +34.48 V

V (S2) · HV/CH1
Bob +34.48 V

R (S1) · RL/CH2
Bob -48.26 V

L (S3) · RL/CH1
Bob -48.26 V


Output channel / Bob EOM target

H (S0)
Alice -158.62 V

V (S2)
Alice +34.48 V

R (S1)
Alice -62.06 V

L (S3)
Alice +158.62 V

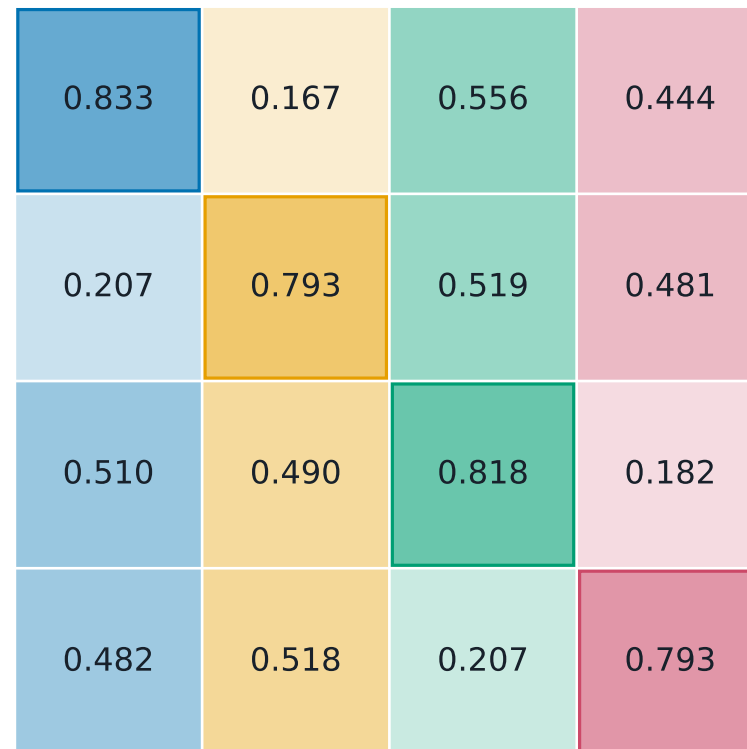

H (S0) · HV/CH2
Bob +34.48 V

V (S2) · HV/CH1
Bob +34.48 V

R (S1) · RL/CH2
Bob -48.26 V

L (S3) · RL/CH1
Bob -48.26 V

Output channel / Bob EOM target

Color identifies output channel; shade and numbers show measured values. Outlines mark expected unity outcomes.

Probabilities are normalized within each Bob basis. No background subtraction or detector-efficiency correction.

EOM targets: Alice/AO0, Bob/AO1. Plot order is saved in analysis.json; raw data and CSV matrix order are unchanged.