



Polarization transfer matrix

Gate: 50–60 ns · 8/8 settings · completed · H/R/V/L names provisional

Detected rate (counts/s)

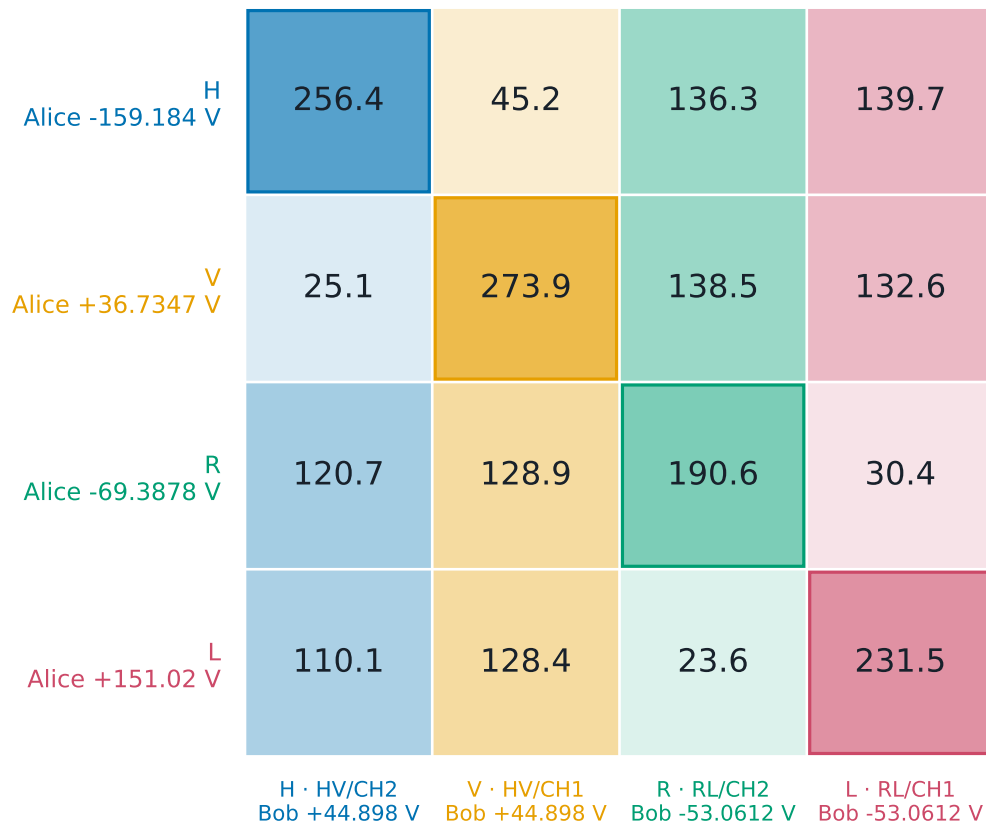

Conditional detection probability

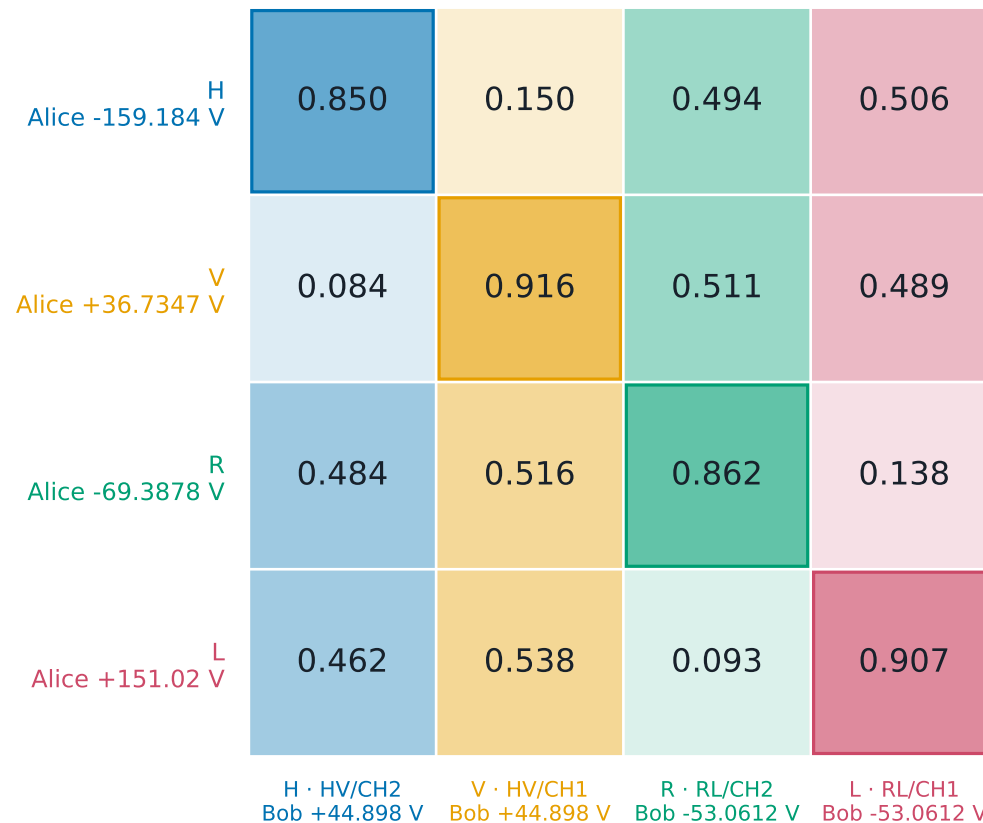

Output channel / Bob EOM target

Output channel / Bob EOM target

Color identifies output channel; shade and numbers show measured values. Outlines mark expected unity outcomes.

Probabilities are normalized within each Bob basis. No background subtraction or detector-efficiency correction.

EOM targets: Alice/AO0, Bob/AO1. Plot order is saved in analysis.json; raw data and CSV matrix order are unchanged.