



DK-LOK UHP Fitting

VC (Visual Check) DCR Fitting

100% Compatible Designs

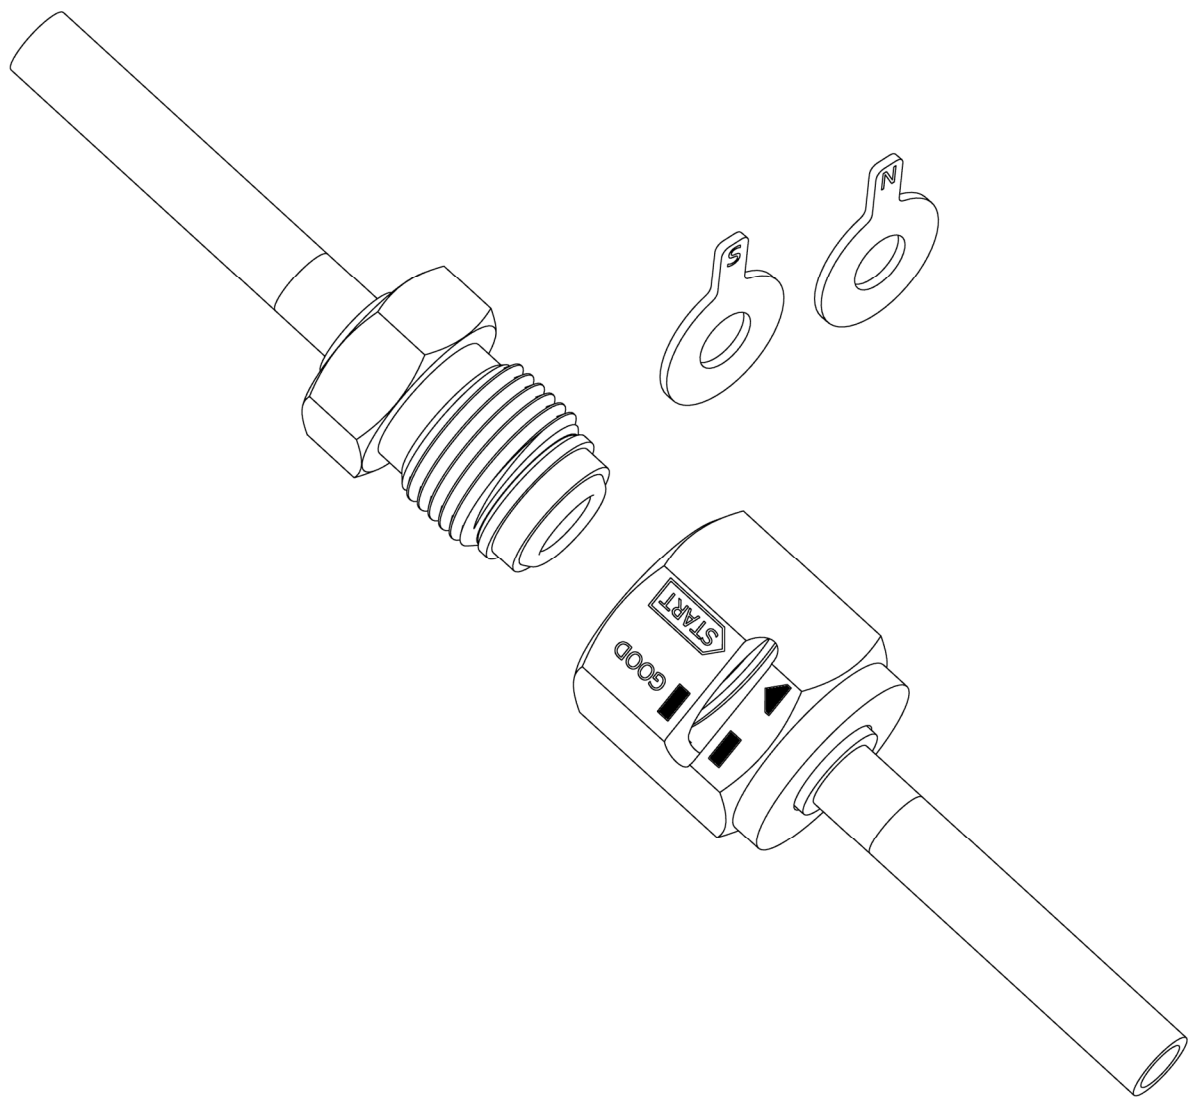

DK-LOK

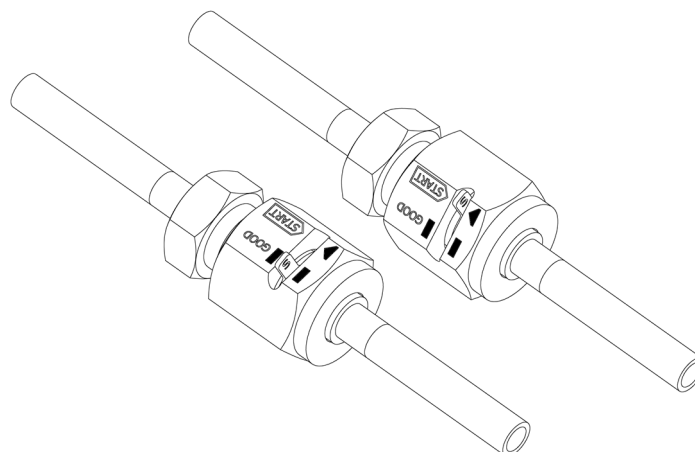


Features

- VC (Visual Check) Indicator shows gasket material, such as "N" for Nickel and "S" for SUS316L.
- VC (Visual Check) Slot of female nut shows a gasket installed or not.
- **START** and **GOOD** on female nut surface indicate the correct installation of VC DCR.
- No need for marking on female and male nuts for confirmation of 1/8 turn reduces installation time.
- Nut loosening due to vibration or other causes can be identified.

Dimensions

Female Nut with VC Slot	Part No.	Size (in.)	L (mm)	D (mm)	H Hex (mm)
	U-VCFN4	1/4	20.6	9.1	33.3
	U-VCFN8	1/2	22.4	15.5	38.1
	U-VCFN12	3/4	28.4	22.6	50.8
	U-VCFN16	1	34.0	30.5	56.4

Gasket with VC Indicator	Part No.	Size (in.)	T (mm)	E (mm)
	U-VCGK4-S	1/4	0.8	5.6
	U-VCGK4-N			
	U-VCGK8-S	1/2	0.8	11.2
	U-VCGK8-N			
	U-VCGK12-S	3/4	0.8	16.7
	U-VCGK12-N			
	U-VCGK16-S	1	0.8	35.8
	U-VCGK16-N			

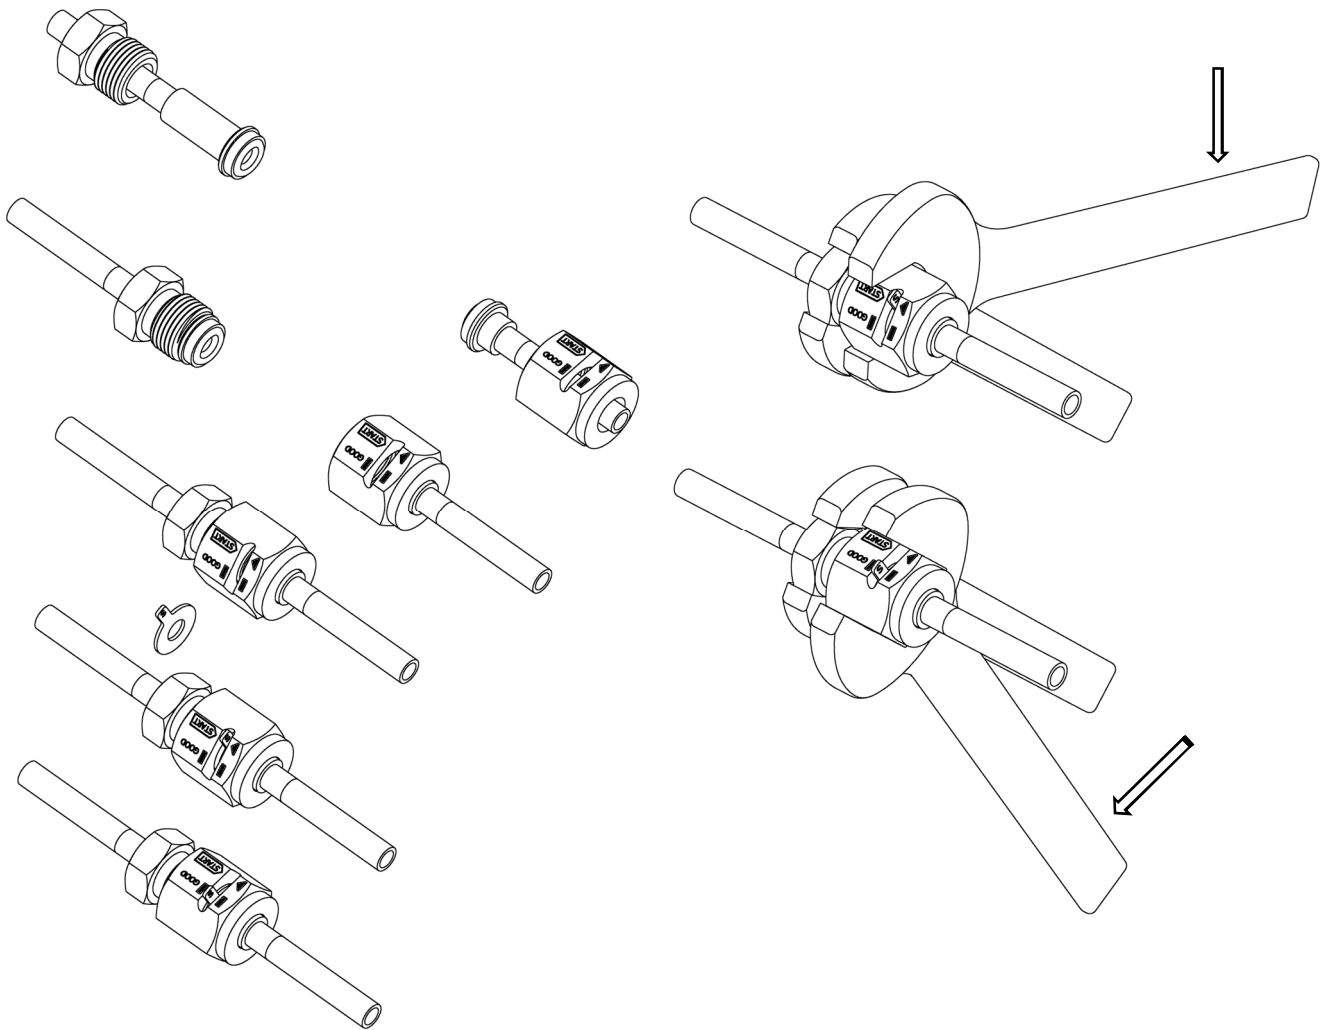

Installation Steps

1. Tighten male and female nuts of VC DCR Fitting by fingers until ends of the two glands meet gently together.
2. Loosen the female nut 1 turn by finger.
3. Insert a gasket through VC Slot.
4. While VC Indicator fixed on **START** position, rotate the male nut with finger until finger-tight.
5. Rotate the female nut with wrench until the VC Indicator of gasket aligned with **GOOD**.
6. If under tightened, VC Indicator would not reach **GOOD**. Over-tightening of female nut makes the VC indicator deformed.

Safe Valve Selection

The selection of a valve for any application or system design must be considered to ensure safe performance. Valve function, valve rating, material compatibility, proper installation, operation and maintenance remain the sole responsibility of the system designer and the user. DK-Lok accepts no liability for any improper selection, installation, operation or maintenance.

© Copyright 2017. All Rights Reserved.

DK-LOK[®]
Fittings & Valves
www.dklok.com

DK-LOK Corporation
Mailing Address
7, Golden root-ro 129beon-gil, Juchon-myeon,
Gimhae-si, Gyeongsangnam-do, South Korea 621-842

DK-Lok contact information
Tel. (82) 55-338-0114
Fax. (82) 55-901-0143
E-mail : sales@dklok.com

For International customers
Tel. (82) 55-338-0031/2
Fax. (82) 55-901-0142
E-mail : dklok@dklok.com