NS26F Datalogger
Formula Student Korea 2026

Decoupling Cap

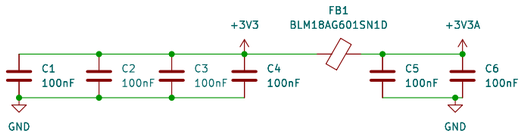

RESET Pull Up



SWD



Crystal



Main Connector 20P



USB-C Port

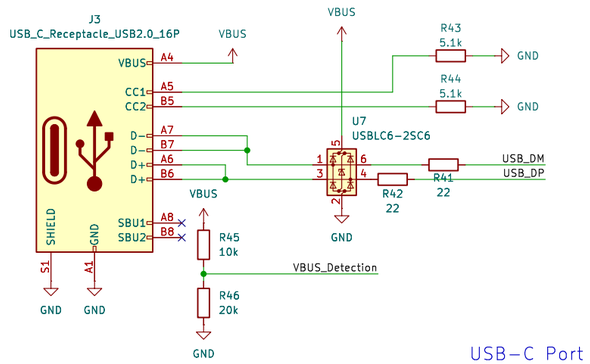

Mouting Hole



5V to 3.3V

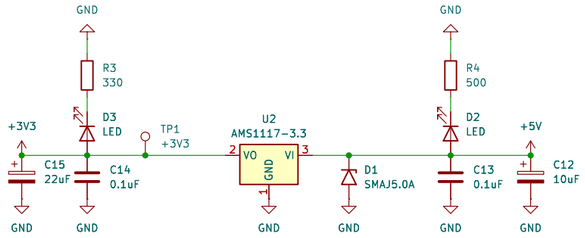

CAN Transceiver

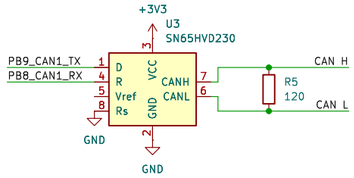

USER LEDs

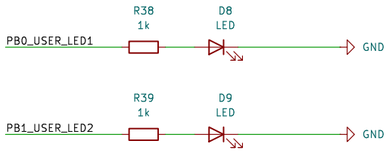

STM32F405

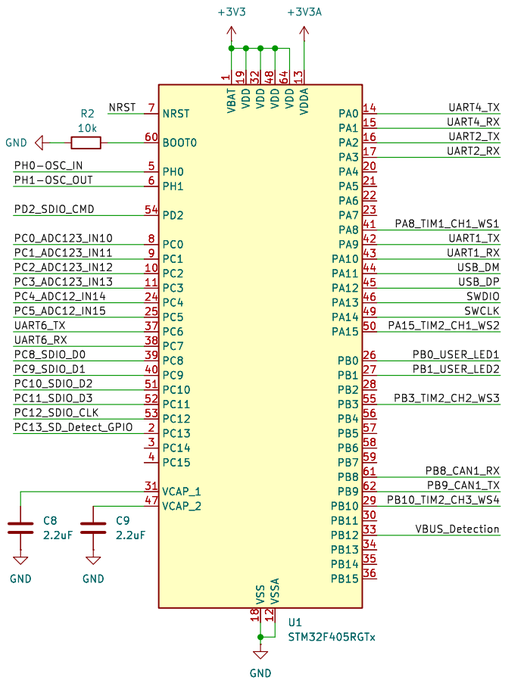

Micro SD Slot

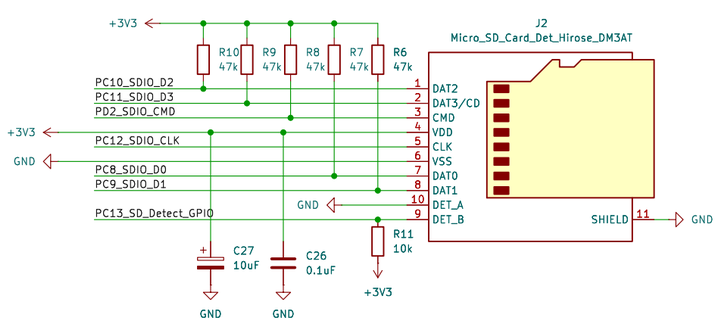

Wheel Speed

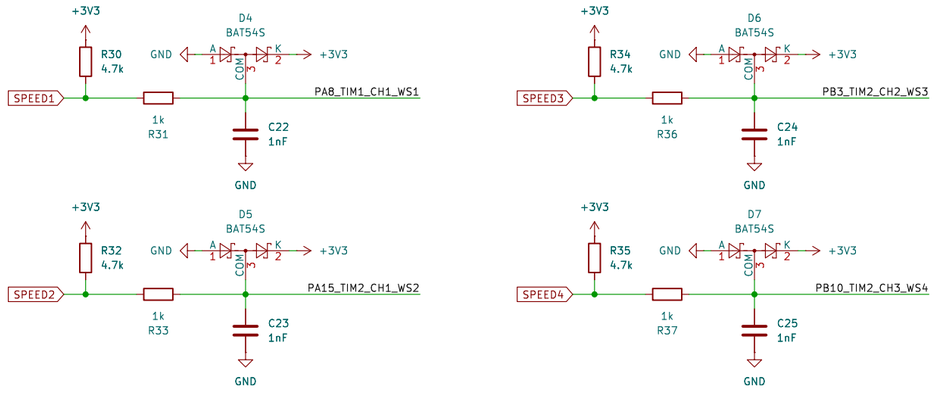

ADC Buffer / 5V to 3.3V Range

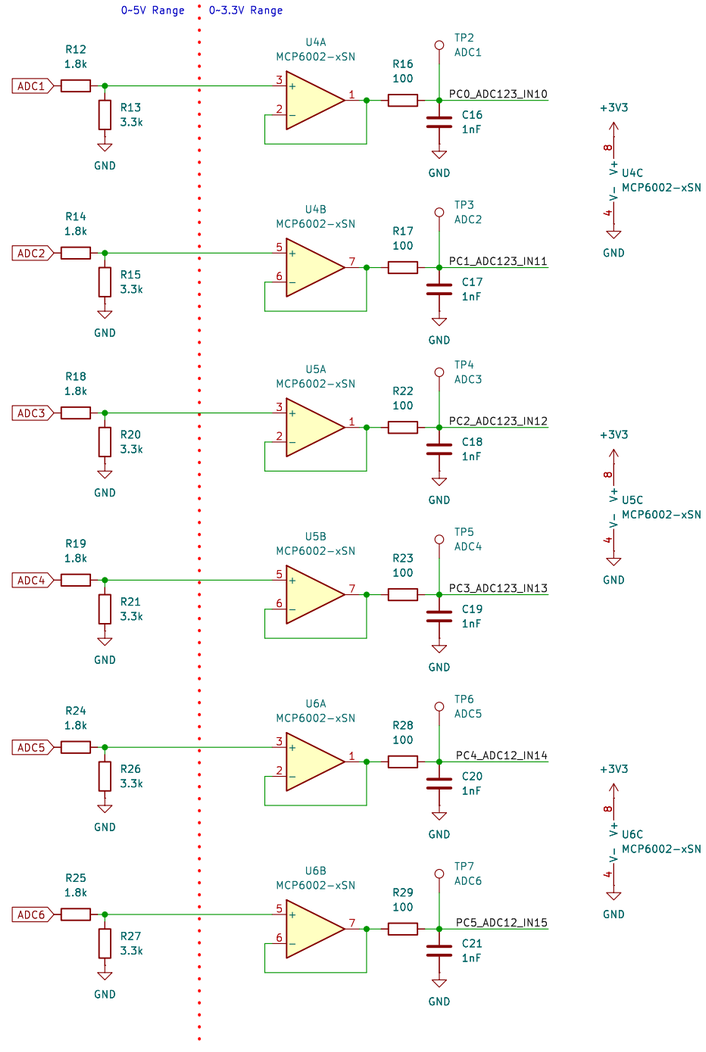

Sheet: /		
File: DLTM.kicad_sch		
Title:		
Size: User	Date:	**Rev:**
KiCad E.D.A. 9.0.5		Id: 1/1