

Product Description


TCG-Grease-6000 is a thermally conductive silicone-based grease designed to provide efficient heat transfer between heat-generating components and heat sinks, while forming a low-resistance interface through excellent surface wetting and simplifying application with a low-viscosity formulation based on thermally conductive metal and ceramic fillers.



Applications

- CPUs (notebooks, desktops, servers)
- GPUs (graphics processors)
- AI processors
- Custom ASICs
- Power electronic devices
- Networking processors
- Switching processors

Product Identification

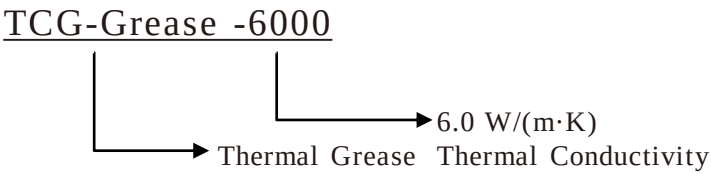

Application Guidelines

- Avoid exposure to open flame
- Ensure application surfaces are clean
- Screen print to 0.1-0.2 mm thickness or dispense

Storage and Shelf Life

- Store at 10°C to 30°C in a dry environment.
- Shelf life is 12 months from the date of manufacture.

Packaging Information

- Thermal grease is available in 1 kg can
- Other sizes are available upon request
- Can be packaged in tubes for automated dispense

Key Features

- High thermal conductivity
- Low bond line thickness for low thermal resistance
- Surface wettability for improved interfacial contact
- Low viscosity for ease of dispensing and spreading
- Effective thermal stability and reliability
- RoHS compliant

Property	Value	Test Method
Color	Gray	Visual
Viscosity	350,000	ASTM D2196
Thermal Conductivity	6.0 W/(m·K)	ASTM D5470
Typical Thickness @ 50 psi	50 μm	--
Density	2.7 g/cc	ASTM D792
Volume Resistivity	10 ⁸ Ω-cm	ASTM D257
Operating Temperature Range	-40°C to 150°C	--
Thermal Impedance @ 50 psi	0.05 °C-cm ² /W	ASTM D5470
Thermal Impedance @ 100 psi	0.03 °C-cm ² /W	ASTM D5470
Flammability Rating	V-0	UL94

The data provided are typical values derived from laboratory testing and are intended for reference only. They should not be used as specifications or as a basis for design without independent validation.