

Product Description

GFTP-300 AB EMI Absorbent Gap Pad is a thermally conductive interface material with integrated EMI shielding capability, designed to provide efficient heat transfer between heat-generating components and heat sinks while attenuating electromagnetic interference in high-density electronic assemblies. Engineered for applications where both thermal management and electromagnetic compatibility are critical, GFTP-300 AB delivers stable thermal performance over time while conforming to surface irregularities and minimizing mechanical stress on sensitive components. The material utilizes a ceramic-filled silicone matrix combined with electromagnetic loss fillers to enable simultaneous heat conduction and EMI absorption, while a controlled low oil bleed formulation helps preserve interface integrity and reduce contamination under thermal and mechanical loading.

Key Features

- **EMI Absorption/Shielding**
- Thermally conductive, electrically insulating
- Conformable for effective gap filling
- Low compression force for reduced stress
- Stable performance over wide temperatures
- Multiple thickness options for gap variation

Applications

- Heat sink attachment for electronic components
- Power electronics and power supply modules
- Telecommunications and networking systems
- Consumer and computing electronics
- Automotive electronic assemblies

Application Guidelines

- Avoid exposure to open flame and direct sunlight.
- Ensure application surfaces are clean.


Storage and Shelf Life

- Store at 8°C to 28°C in a dry environment (RH<70%).
- Shelf life is 12 months from the date of manufacture.

Packaging Information

- Available in thicknesses from 0.5 mm to 10.0 mm, with additional thicknesses available upon request
- Supplied in standard sheet formats and custom die-cut parts for specific application requirements
- Custom sizes and configurations supported to meet design and manufacturing needs

Attenuation

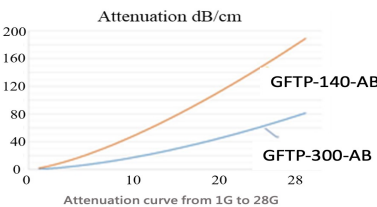

Property	Value	Test Method
Color	Black	Visual
Hardness (Shore 00)	50	ASTM D2240
Thermal Conductivity (W/(m·K))	3.0	ASTM D5470
Thickness (mm)	0.5 – 5.0	--
Density (g/cm ³)	3.9	ISO 1183
Breakdown Voltage (kV/mm)	>10	ASTM D149
Operating Temperature Range (°C)	-40 - 100	--
Volume Resistivity (Ω·cm)	10 ¹²	ASTM D257
Flammability Rating	V-0	UL94
Magnetic conductivity μ'@1Ghz	3.5	GB/T 32596

The data provided are typical values derived from laboratory testing and are intended for reference only. They should not be used as specifications or as a basis for design without independent validation.