

Product Description

PT-400 is a two-part thermally conductive potting material designed to provide efficient heat transfer between heat-generating devices and heat sinks, while self-leveling to fill interfacial gaps and providing electrically insulating, vibration damping protection to improve system reliability and reduce thermally induced mechanical stress after cure. It is supplied as a 1:1 mix ratio system with low viscosity and thixotropic flow characteristics, and cures at room temperature with optional heat acceleration.


Key Features

- 1:1 two-part system for accurate proportioning and consistent mixing
- Low viscosity with thixotropic flow for controlled dispensing and gap filling
- Conforms to complex geometries under applied force for full interface coverage
- Room-temperature cure with optional heat acceleration for flexible processing
- High modulus after cure to reduce stress from thermal expansion mismatch

Applications

- Consumer electronic products
- Communication enclosures
- Semiconductor enclosures
- Power supply enclosures
- EV Battery enclosures

Product Identification

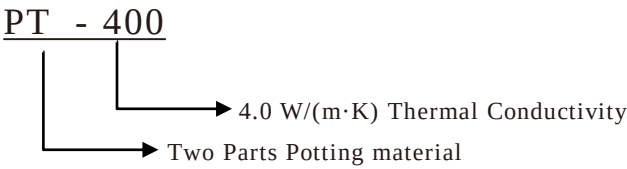

Application Guidelines

- Avoid exposure to open flame
- Ensure application surfaces are clean
- Dispense directly onto the target component using a servo-controlled or precision dispensing method.
- Cure time depends on application conditions

Storage and Shelf Life

- Store at 8°C to 28°C in a dry environment (RH<70%).
- Shelf life is 12 months from the date of manufacture.

Packaging Information

- Supplied in 1:1 dual-cartridge formats (50 cc, 400 cc) and bulk packaging for accurate proportioning and compatibility with automated dispensing systems.

Property	Value	Test Method
Color (A)	Pink	Visual
Color (B)	White	Visual
Mixing Ratio	1:1	--
Thermal Conductivity (W/(m·K))	4.0	ASTM D5470
Mixing Viscosity (cP)	22,000	ASTM D2196
Hardness (Shore C)	65	ASTM D2240
Operating Temperature Range (°C)	-50 to 200	--
Flammability Rating	V-0	UL 94
Volume Resistivity (Ω-cm)	>10 ¹³	ASTM 9257
Curing time (hours) @ 25°C	4	--
Curing time (minutes) @ 150°C	10 minutes	--

The data provided are typical values derived from laboratory testing and are intended for reference only. They should not be used as specifications or as a basis for design without independent validation.