
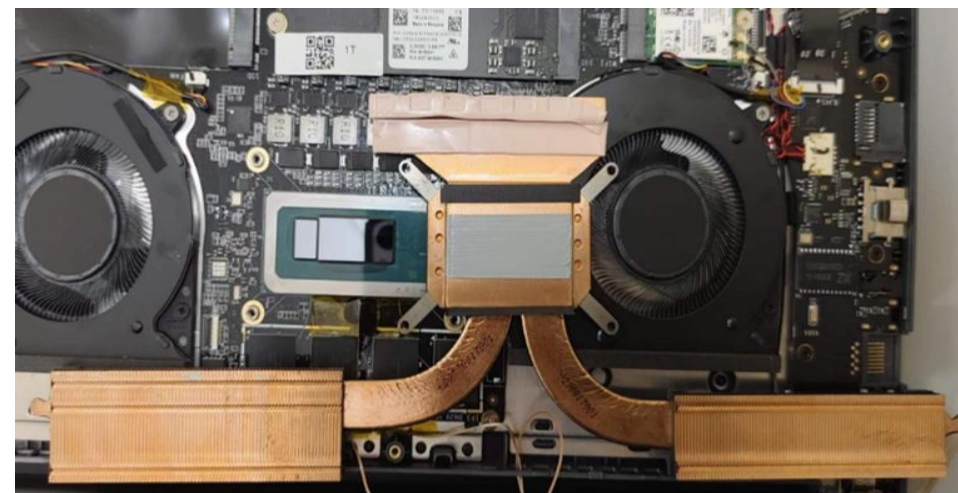
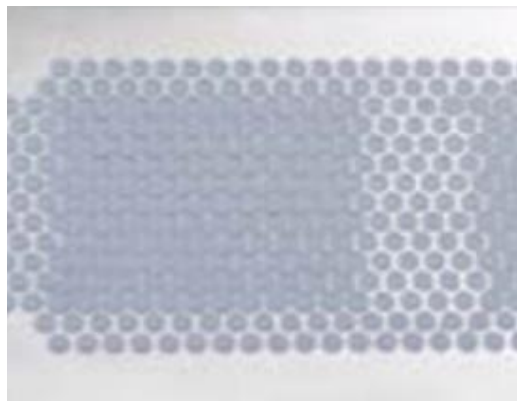


Deep-Materials EC Products Replace FoF

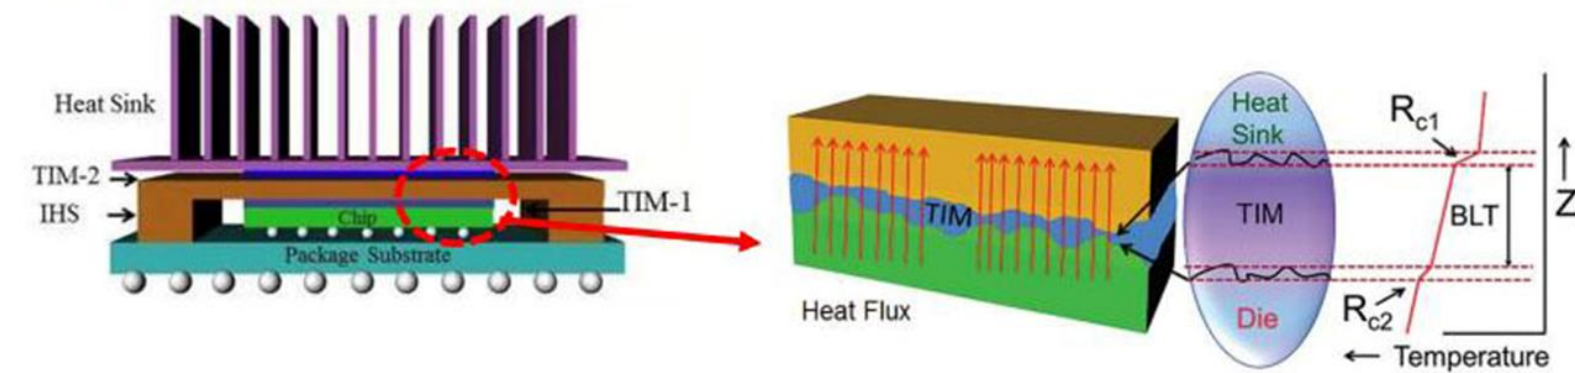

Use fundamental science to make practical improvements in TIM

Deep-Materials

TIM Product Brochure

Use *fundamental science* to make practical improvements in Thermal Materials


CPU/GPU TIMs



Grease

- Best in class performance
- Significantly reduce pump out

Highest performance traditional grease & Innovative Liquid Metal grease with low resistance



Liquid Metal

- Multi-phase Liquid metal – high viscosity
- Practical to use
- Highest performance

Brand new category of TIM with perf. of LM but ease of grease

Gap Fillers



Gels

- Highest conductivity
- Almost no oil seepage

Many kinds of unique gels – e.g. ultra low oil seepage gel, low dielectric constant gels



Gap Pads

- Almost eliminate oil seepage
- Reliable to very high temperatures

Ultra low oil seepage & ultra low outgassing silicone pads



GAP Fillers

- For Applications in lower power/thicker TIM applications
- Do not require high pressure or mechanical support
- Typically used in consumer electronics, SSDs, Radios
- Performance measured in thermal conductivity (W/mK)

Our offerings in this space

- Liquid Gap Fillers/Gels
 - Single part (Fully cured)/Two part (in situ cure)
- Gap pads

EC Products Replace FoF



Applications:
Handsets/Tablets, Laptop computers, Cabinet applications, Servers Printers, Networking equipment, Desktop computers

	TPGF-180 EC (Two Part EC Gel)	GFTP-180 EC (Thermal Pad)	Test Methods
Color	Black	Black	Visual
Mixing Ratio	1: 1	-	-
Viscosity (cps)	200,000	-	ASTM D2196
Density (g/cc)	2.0	2.0	ASTM D792
Hardness (shore 00)	60 (after fully cured)	65	ASTM 2240
Minimum BLT (mm)	0.2	-	-
Operation Temperature (°C)	-60 to 180	-60 to 180	-
Volatility (%)	< 0.1%	-	ASTM E595
Electrical Properties			
Resistivity (ohm-cm)	1	1	Four-point probe
Flammability Rating	V-0	V-0	UL94
Thermal Performance			
Thermal Conductivity (W/m·K)	1.5	1.5	ASTM D5470
Curing Parameters			
Operation Time@ 25°C (min)	60	-	-
Curing time@ 25°C (Hrs)	4	-	-
Curing Time@ 100°C (min)	10	-	-

Deep Materials Inc.

Address: 14654 Placida Ct, Saratoga, CA, USA

Manufacture: No.68 Lianfeng Road, Changshu, Suzhou City,
Jiangsu Province, China

Website: deep-materials.com

Email: sales@deep-materials.com

