
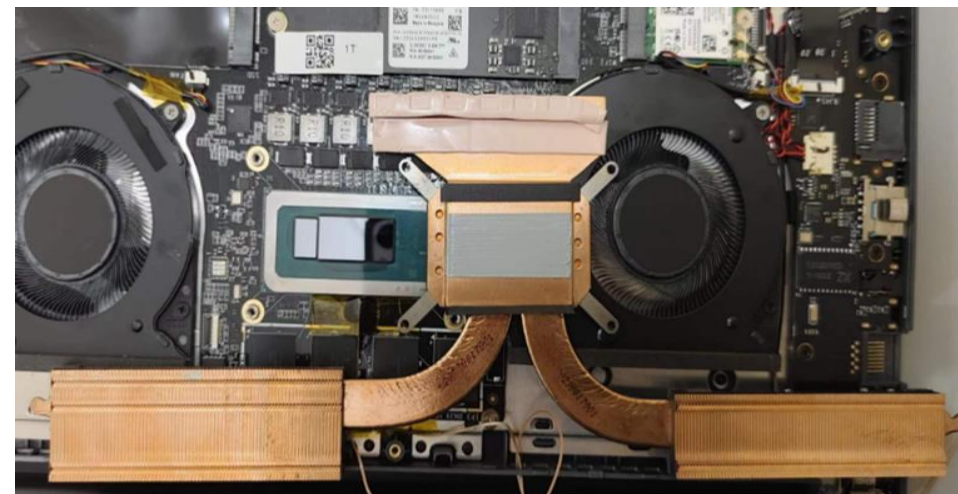
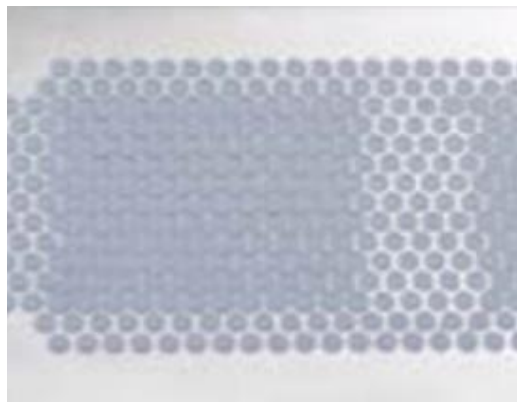


Deep-Materials Gap Pads Products

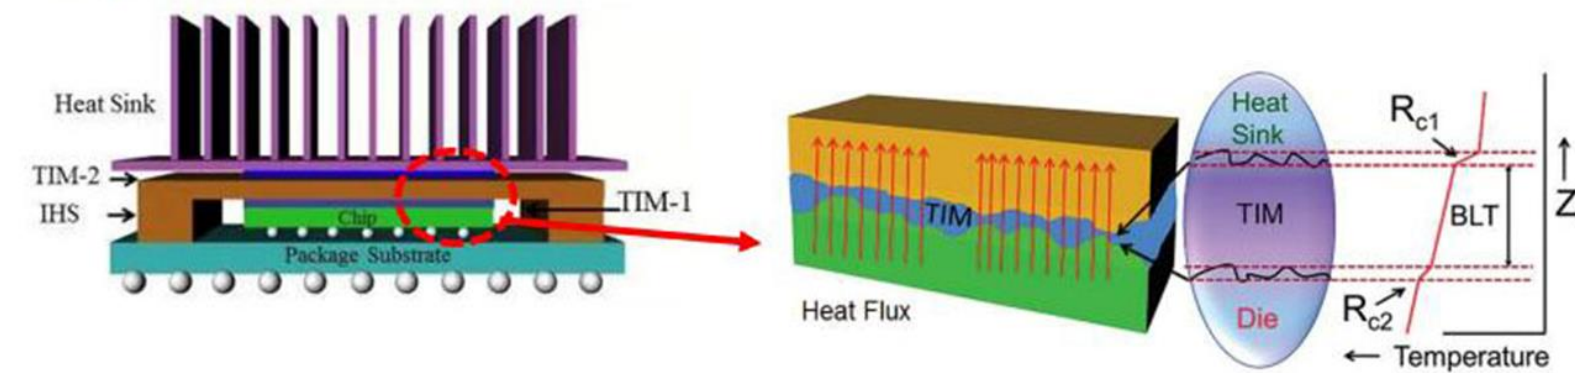

Use fundamental science to make practical improvements in TIM

Deep-Materials

TIM Product Brochure

Use *fundamental science* to make practical improvements in Thermal Materials


CPU/GPU TIMs



Grease

- Best in class performance
- Significantly reduce pump out

Highest performance traditional grease & Innovative Liquid Metal grease with low resistance



Liquid Metal

- Multi-phase Liquid metal – high viscosity
- Practical to use
- Highest performance

Brand new category of TIM with perf. of LM but ease of grease


Gap Fillers



Gels

- Highest conductivity
- Almost no oil seepage

Many kinds of unique gels – e.g. ultra low oil seepage gel, low dielectric constant gels



Gap Pads

- Almost eliminate oil seepage
- Reliable to very high temperatures

Ultra low oil seepage & ultra low outgassing silicone pads

GAP Fillers

- For Applications in lower power/thicker TIM applications
- Do not require high pressure or mechanical support
- Typically used in consumer electronics, SSDs, Radios
- Performance measured in thermal conductivity (W/mK)

Our offerings in this space

- Liquid Gap Fillers/Gels
 - Single part (Fully cured)/Two part (in situ cure)
- Gap pads

Gap Pads



Applications:

Consumer Electronics, Automotive, Computing
SSDs, Memory Modules, Networking, Data Centers

	GFTP-200T	GFTP-200	GFTP-300	GFTP-500	GFTP-600	GFTP-800	GFTP-1000	GFTP-1200	GFTP-1500	Testing Method
Color	White + Grey	Light Grey	Light Blue	Green	Grey	Dark Grey	Grey	Grey	Grey	Visual
Thickness (mm)	0.5~10.0	0.5~10.0	0.5~10.0	0.5~10.0	0.5~10.0	0.5~10.0	0.5-4.0	0.5-4.0	0.5-4.0	—
Density (g/cc)	2.0	2.8	2.9	3.1	3.2	3.3	3.6	3.6	3.6	ASTM D792
Hardness (Shore 00)	30	30	45	50	55	55	55	55	65	ASTM D2240
Operation Temp (°C)	-50~200	-50~200	-50~200	-50~200	-50~200	-50~200	-50~200	-50~200	-50~200	—
Electrical Parameters										
Dielectric Constant@1GHZ	5.7	6.5	6.8	7.3	7.7	8.1	9.9	9.9	10.5	ASTM D150
Volume Resistance (Ω.cm)	10 ¹⁵	10 ¹³	10 ¹³	10 ¹³	10 ¹³	10 ¹³	10 ¹³	10 ¹³	10 ¹³	ASTM D257
Breakdown Voltage (KV/mm)	>10	>10	>10	>10	>10	>10	>10	>10	>10	ASTM D149
Flammability rating	V-0	V-0	V-0	V-0	V-0	V-0	V-0	V-0	V-0	UL 94
Thermal Parameters										
Thermal Conductivity (W/m-K)	2.0	2.0	3.0	5.0	6.0	8.0	10.0	12.0	15.0	ASTM D5470

Contact Us

Deep Materials Inc.

Address: 14654 Placida Ct, Saratoga, CA, USA

Manufacture: No.68 Lianfeng Road, Changshu, Suzhou City,
Jiangsu Province, China

Website: deep-materials.com

Email: sales@deep-materials.com

