
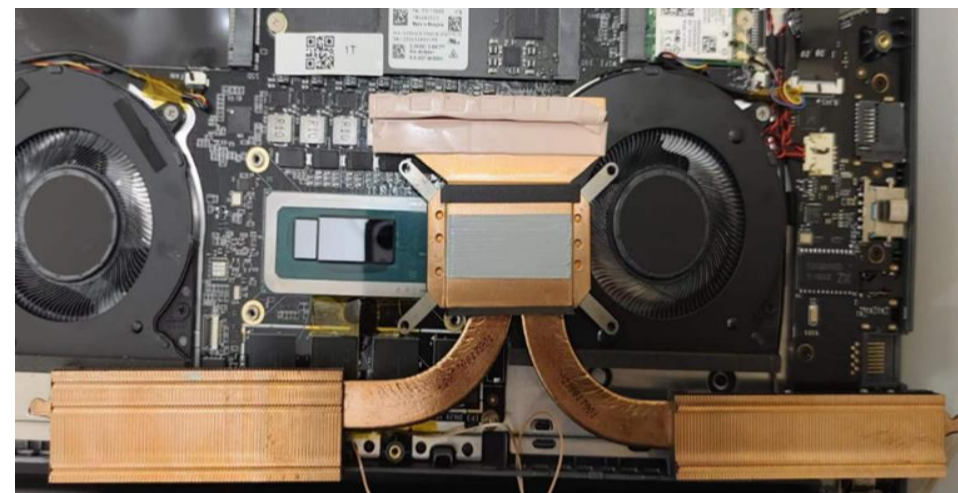
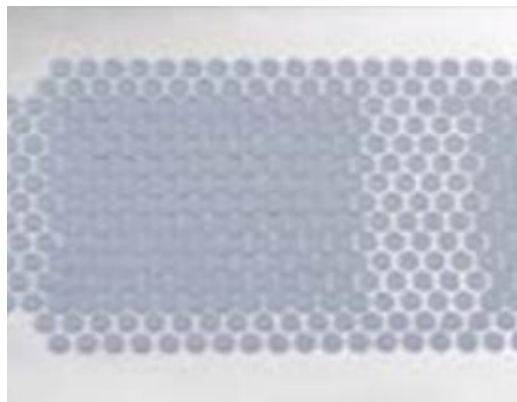


Deep-Materials Potting Materials

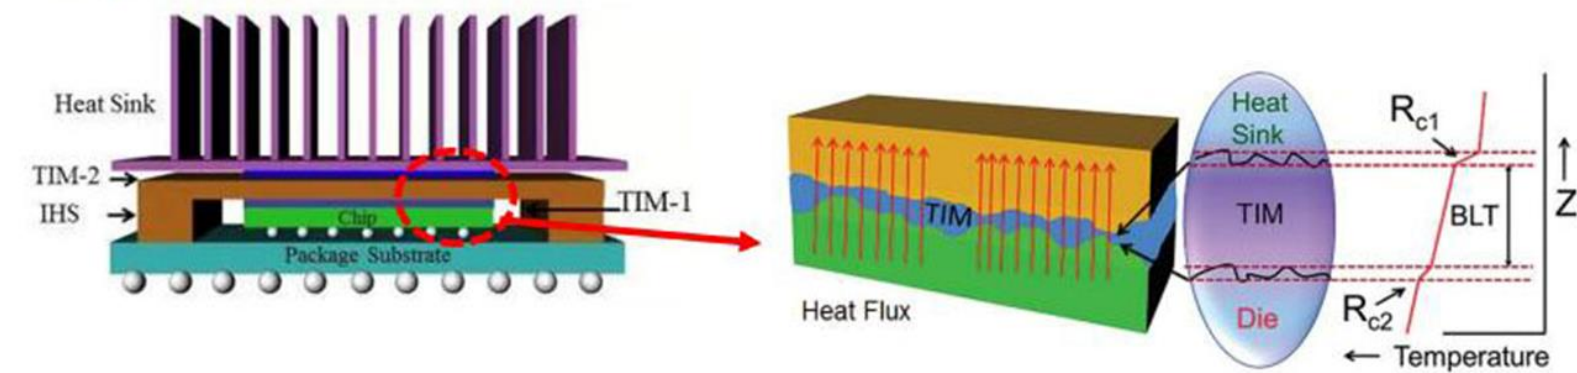

Use fundamental science to make practical improvements in TIM

Deep-Materials

TIM Product Brochure

Use *fundamental science* to make practical improvements in Thermal Materials


CPU/GPU TIMs



Grease

- Best in class performance
- Significantly reduce pump out

Highest performance traditional grease & Innovative Liquid Metal grease with low resistance



Liquid Metal

- Multi-phase Liquid metal – high viscosity
- Practical to use
- Highest performance

Brand new category of TIM with perf. of LM but ease of grease

Gap Fillers



Gels

- Highest conductivity
- Almost no oil seepage

Many kinds of unique gels – e.g. ultra low oil seepage gel, low dielectric constant gels



Gap Pads

- Almost eliminate oil seepage
- Reliable to very high temperatures

Ultra low oil seepage & ultra low outgassing silicone pads


GAP Fillers

- For Applications in lower power/thicker TIM applications
- Do not require high pressure or mechanical support
- Typically used in consumer electronics, SSDs, Radios
- Performance measured in thermal conductivity (W/mK)

Our offerings in this space

- Liquid Gap Fillers/Gels
 - Single part (Fully cured)/Two part (in situ cure)
- Gap pads

Potting Materials

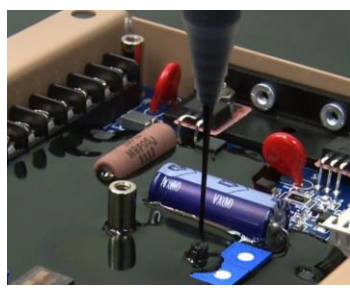

Applications:
Electronic accessories, Connectors, Sensors,
Transformers, Power Control, EV Scooter Battery,
EV Chargers

	TPGF-BD-100	PT-150	PT-200	PT-300	Testing Method
Color A/B	Light Yellow/White	Gray/White	Gray/White	Black/White	Visual
Mixing Ratio	1: 1	1: 1	1: 1	1: 1	–
Viscosity (cps)	100,000	5,000	8,000	15,000	ASTM D2196
Density (g/cc)	1.8	2.4	2.8	3.0	ASTM D792
Hardness (shore C, after fully cured)	65	65	65	65	ASTM D2240
Operation Temperature (°C)	-50~200	-50~200	-50~200	-50~200	–
Tensile Strength (MPa)	3	1.3	0.9	0.6	ASTM D638
Shear Strength (MPa)	1.7	-	-	-	ASTM D638
Electrical Parameters					
Breakdown Voltage (Kv/mm)	>8.0	>8.0	>8.0	>8.0	ASTM D149
Volume Resistance (Ω .cm)	10^{13}	10^{13}	10^{13}	10^{13}	ASTM D257
Flammability rating	V-0	V-0	V-0	V-0	UL 94
Thermal Performance					
Thermal Conductivity (W/m-K)	1	1.5	2.0	3.0	ASTM D5470
Curing Parameters					
Operation Time@ 25°C (Hrs)	1	1	1	1	-
Curing time@ 25°C (Hrs)	4	4	4	4	-
Curing Time@ 150°C (min)	30	10	10	10	-
SPECIAL PROPERTIES	High Bonding	High Flow	High Flow	-	-

Deep Materials Inc.

Address: 14654 Placida Ct, Saratoga, CA, USA

Manufacture: No.68 Lianfeng Road, Changshu, Suzhou City,
Jiangsu Province, China

Website: deep-materials.com

Email: sales@deep-materials.com

