
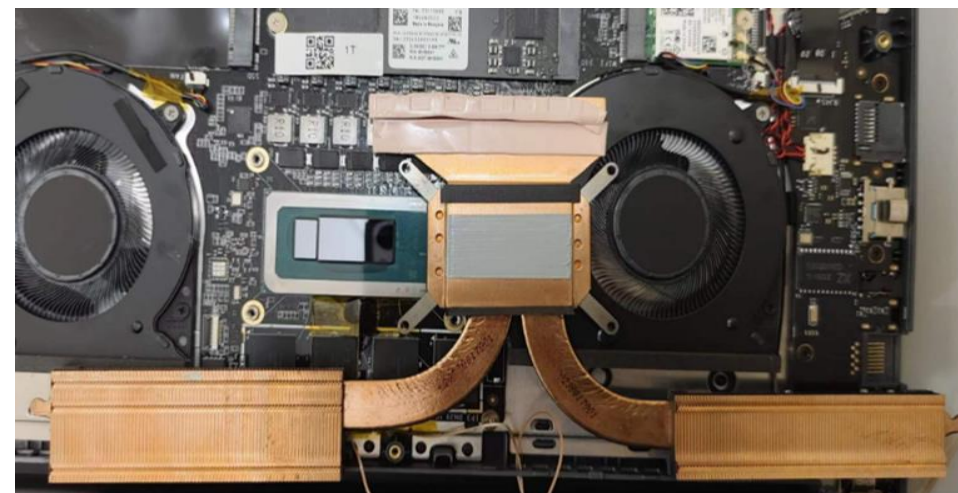


Deep-Materials Thermal Grease Products

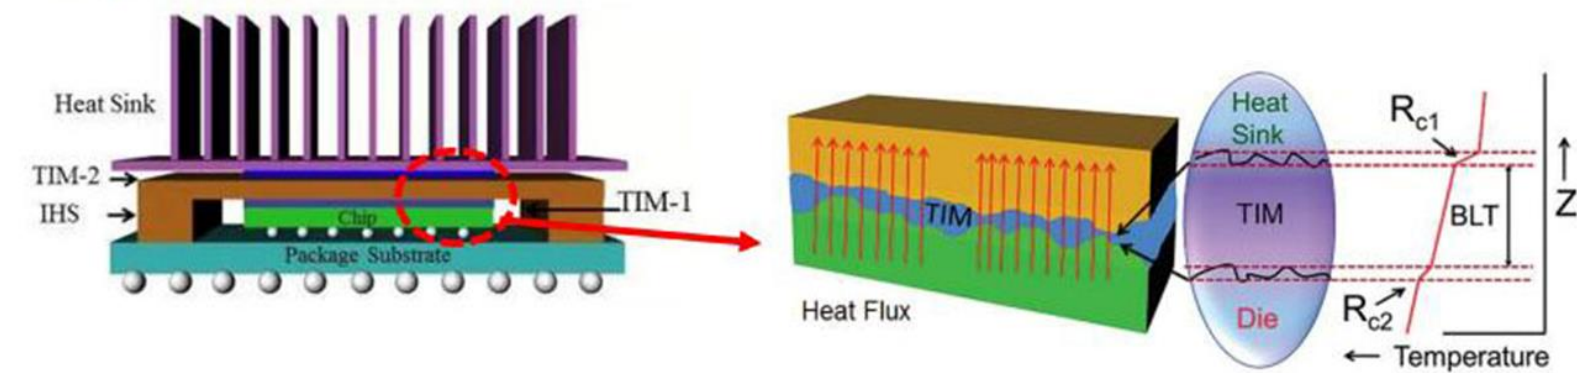

Use fundamental science to make practical improvements in TIM

Deep-Materials

TIM Product Brochure

Use *fundamental science* to make practical improvements in Thermal Materials


CPU/GPU TIMs



Grease

- Best in class performance
- Significantly reduce pump out

Highest performance traditional grease & Innovative Liquid Metal grease with low resistance



Liquid Metal

- Multi-phase Liquid metal – high viscosity
- Practical to use
- Highest performance

Brand new category of TIM with perf. of LM but ease of grease

Gap Fillers



Gels

- Highest conductivity
- Almost no oil seepage

Many kinds of unique gels – e.g. ultra low oil seepage gel, low dielectric constant gels



Gap Pads

- Almost eliminate oil seepage
- Reliable to very high temperatures

Ultra low oil seepage & ultra low outgassing silicone pads



CPU/GPU/Low BLT TIMs

- For Applications with mechanical attach
- High power AI Chips, GPUs, DPUs, CPUs, Networking,
- Performance measured in thermal resistance ($^{\circ}\text{C}\text{-cm}^2/\text{W}$)
- Our Offerings in this space – Greases, Liquid Metals

Grease



Applications:
CPU, GPU, Laptops, Desktop, Gaming, Servers
Power Electronics, Cold plates, AI Chips

P/N	TCG-Grease-2000	TCG-Grease-2000S	TCG-Grease-3500	TCG-Grease-5000	TCG-Grease-6000	Testing Method
Color	Yellow/Grey	Grey	Grey	Grey	Grey	Visual
BLT (mm) @ 50 psi	0.030	0.030	0.045	0.045	0.05	—
Density (g/cc)	3.4	3.0	2.5	2.4	2.7	ASTM D792
Viscosity (cps)	90,000	160,000	220,000	< 250,000	< 350,000	ASTM D2196
Operation Temperature (°C)	-40~150	-40~150	-40~150	-40~150	-40~150	—
Electrical Parameters						
Volume Resistance (Ω.cm)	10 ¹³	10 ¹³	10 ⁸	10 ⁸	10 ⁸	ASTM D257
Breakdown Voltage (Kv/mm)	>5.0	>5.0	>3.0	>3.0	>3.0	ASTM D149
Flammability rating	V-0	V-0	V-0	V-0	V-0	UL 94
Thermal Performance						
Thermal Conductivity (W/m-K)	2.0	2.0	3.5	5.0	6.0	ASTM D5470
Thermal Resistance vs. Pressure						
Pressure (psi)	50/100	50/100	50/100	50/100	50/100	ASTM D5470
Thermal Resistance (°C -cm ² /W)	0.13 / 0.11	0.17 / 0.15	0.06 / 0.05	0.05 / 0.04	0.05 / 0.03	—



Deep Materials Inc.

Address: 14654 Placida Ct, Saratoga, CA, USA

Manufacture: No.68 Lianfeng Road, Changshu, Suzhou City,
Jiangsu Province, China

Website: deep-materials.com

Email: sales@deep-materials.com

