


Product Description

PCM9600 is a thermally conductive phase change material designed to provide efficient heat transfer between heat-generating components and heat sinks, while reducing interfacial thermal resistance through phase transition and improved surface wetting, and is formulated to transition from solid to fluid at approximately 50°C to ensure reliable contact under operating conditions.

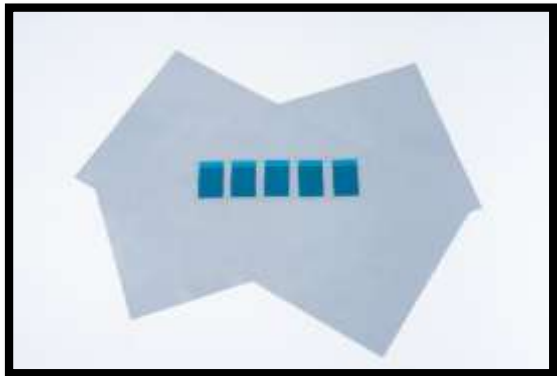

Key Features


- Low thermal resistance for efficient heat transfer
- Phase change behavior for improved interfacial contact under operating condition
- Forms a thin, uniform bond line to minimize thermal impedance
- Solid for simplified handling and assembly
- Low pump-out / migration for long-term reliability
- Low volatility for thermal stability over time
- RoHS compliant

Applications

- Microprocessors and chipsets
- Power semiconductors and voltage regulators
- Graphics processors and high-performance computing devices
- Telecommunications and networking equipment
- Automotive electronics and battery systems
- LED lighting modules
- Avionics and satellites

Product Identification

PCM9600



Application Guidelines

- Avoid exposure to open flame
- Ensure application surfaces are clean
- Supplied in sheet form

Storage and Shelf Life

- Store at 8°C to 28°C in a dry environment (RH<70%).
- Shelf life is 12 months from the date of manufacture.

Burn-in Instructions

- Thermal activation is required to achieve specified thermal performance. After assembly, operate the system above 70°C for a minimum of 1 hour to enable phase transition and formation of a stable, low-resistance thermal interface.

Property	Value	Test Method
Color	Gray	Visual
Thickness (mm) @ 50 psi	0.02	ASTM D374
Density (g/cc)	2.8	ASTM D792
Continuous Use Temperature (°C)	-40 to 125	/
Phase Changing Temperature (°C)	50	DSC
Volume Resistance ($\Omega\cdot\text{cm}$)	10^{14}	ASTM D257
Thermal Conductivity (W/m·K)	9.6	ASTM D5470
Thermal Impedance (°C-in ² /W)	0.035	ASTM D5470

The data provided are typical values derived from laboratory testing and are intended for reference only. They should not be used as specifications or as a basis for design without independent validation.