



**STEAK LOCKER**



**Winter 2016**

[www.steaklocker.com](http://www.steaklocker.com)

619-363-2830

[info@steaklocker.com](mailto:info@steaklocker.com)



Professional Series

## Design.

Steak Locker introduces the SLPRO435, the world's first smart commercial Dry Aging Fridge developed for the professional Chef, Restaurateur, Butcher, Farmer, Artisan food supplier and the passionate Enthusiast. It will be the centre piece of your new profitable dry age steak program.

## Commercial Smart Application

Steak Locker's smart mobile application allows you to track, monitor and control your valuable inventory in real time from anywhere. It provides extensive product information and will allow you to have full yield control with lower aging loss, ensuring maximum profitability.


## Investment Payback SLPRO435

Prime Bone In Ribeye	\$10 per LBS
Dry Aging Loss	approx. 18%
Final Dry Aged Cost per LBS	\$11.80 w/Steak Locker
La Frida Prime Bone in Ribeye	\$24 per LBS
Average Sub Primal 25 LBS	Pat La Frida; \$630
Average Sub Primal 25 LBS	Steak Locker; \$295
Steak Locker Payback	298 LBS off Dry Age Product



*Old World Techniques  
Paired with New World Technology*



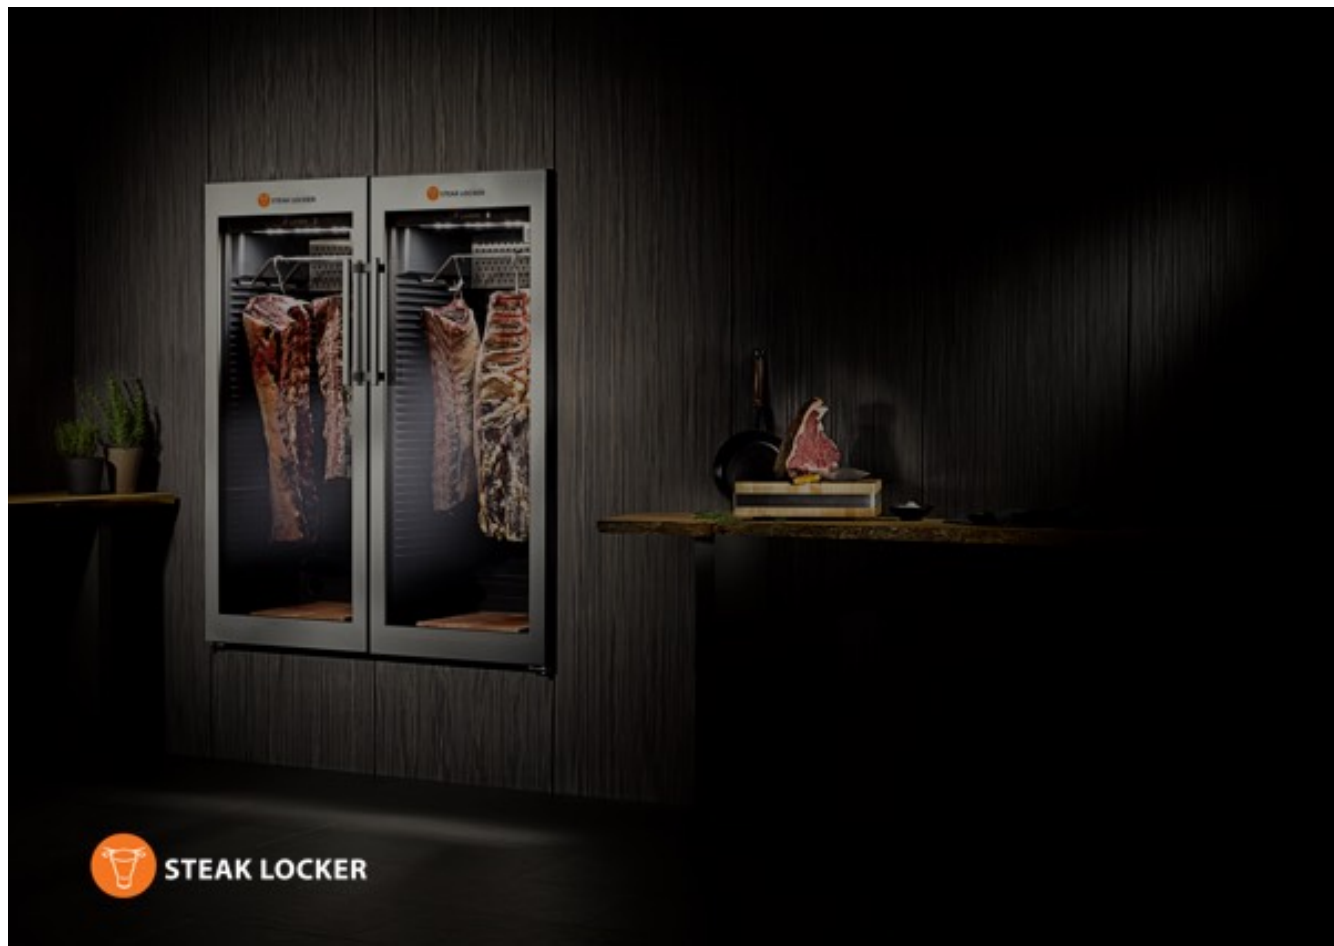

**STEAK LOCKER**



*The Perfect Partner for your  
Dry Aging Program*

## Steak Locker PRO435

**External body** – Stainless Steel

**Insulated glass door** – UV Protection (metallic tint)

**Internal dimensions** – 54.33" H X 21.26" X 22.05"D

**External dimensions** – 64.96" H X 27.56" X 29.53"D

**Internal capacity / net** – Approx: 450LBS

**Temperature range** – 33F to 77F

**Shelves** – Chrome shelving (food grade)

**Control** – Digital control panel

**Humicontrol** – Digital Hygrometer controller powered by SL Smart App (no external water supply necessary)

**Germicidal Light** – Iridium bacterial growth and UV prevention light

**Glass Door** – UV tinted, triple pane

**Reversible Door Swing** – Yes

**Door Lock** – Yes

**Warranty** – 1 year on parts and labor – Ext warranty 3 years

**Voltage** – 110V-120V US Standard / 220V-240V EU Standard

**Frequency** – 60HZ US Standard - 50HZ EU Standard

**Rated Power Input** – 240 Watts

**Rated Current** – 1.6 Amps

**Light Power** – Max 0.5 Watss

**Refrigerant** – R600A (43 g)

**Energy Consumption** – 701 kWh/year

**Electrical Requirements** – Plugs directly into US 110V outlet on a dedicated 15 Amp line



STEAK LOCKER



SL103



SLPRO435



**STEAK LOCKER**

seen on

**GIZMODO** **Los Angeles Times** **YAHOO!**

**EATER**  **DIGITAL TRENDS** **The San Diego Union-Tribune**

**THE WALL STREET JOURNAL.** **The New York Times**

