



**POLITECNICO**  
MILANO 1863

# Music And Acoustic Engineering

COMPUTER MUSIC - LANGUAGES AND SYSTEMS  
Homework #3  
*Group: Algorhythmics - A.Y. 2022/2023*

**YASC**

## Group Members:

Alice Sironi  
Cecilia Raho  
Stefano Ravasi  
Yan Zhuang

# Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
<b>2</b>	<b>Features and GUI</b>	<b>2</b>
2.1	Web system . . . . .	2
2.2	Sound synthesis . . . . .	3
<b>3</b>	<b>Implementation</b>	<b>4</b>
3.1	Overall structure . . . . .	4
3.2	Web system . . . . .	4
3.3	SynthDef <i>flute</i> . . . . .	5
3.4	SynthDef <i>kick</i> . . . . .	6
<b>4</b>	<b>Conclusions and further improvements</b>	<b>6</b>

# 1 Introduction

The goal of the project is to develop an interactive beatboxing recorder performance tool, incorporating Joy-Con controllers via a web interface for gesture-based inputs, Node.js for data handling, and SuperCollider for sound synthesis. The system is able to emulate the beatboxing experience with real-time, responsive feedback to enable an immersive musical performance.

## 2 Features and GUI

For the whole system, it is divided into web system and sound synthesis. The web part involves user interaction, visualization, and real-time communication. The sound Synthesis involves sound generation.

### 2.1 Web system

- *The hotkey page (fig. 1a)*: it serves as an interface for users to personalize their beatboxing experience. Through this page, users can customize their Joy-Con controller buttons to map to different beatboxing and beatboxing sounds.
- *The dino game page (fig. 1b)*: it serves as an interactive training tool designed to help users familiarize themselves with their custom hotkeys. The key point in our implementation is that the jumping action is triggered only through the correct Joy-Con button that the user has previously mapped in the Hotkey Page.
- *The Spectrum Page (fig. 1c)*: it provides an immersive audio-visual experience by representing sounds as visual spectra.

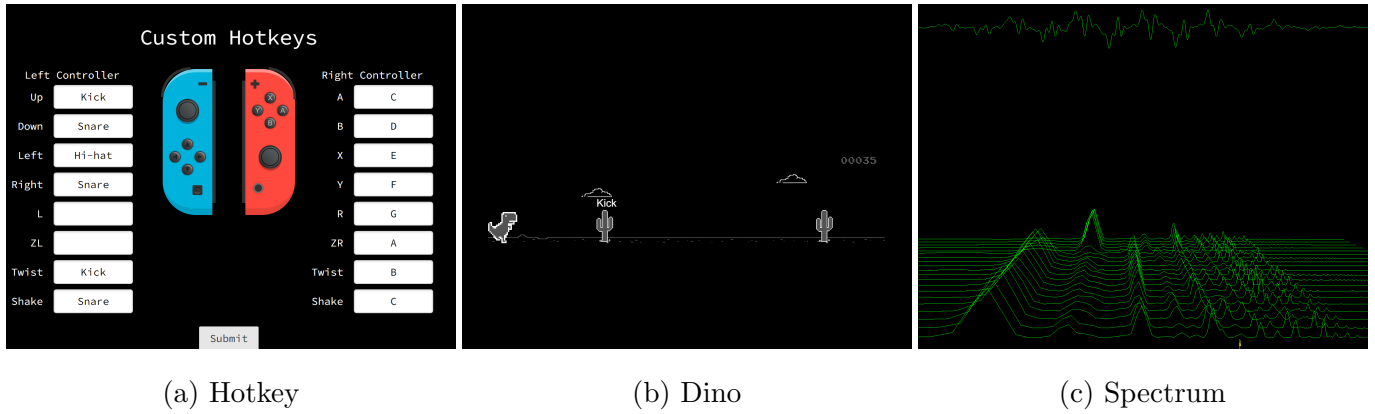


Figure 1: Web System

## 2.2 Sound synthesis

The sound synthesis handled by SuperCollider, offers a couple of sounds including recorder, hi-hat, snare, kick with relative parameters for customization.

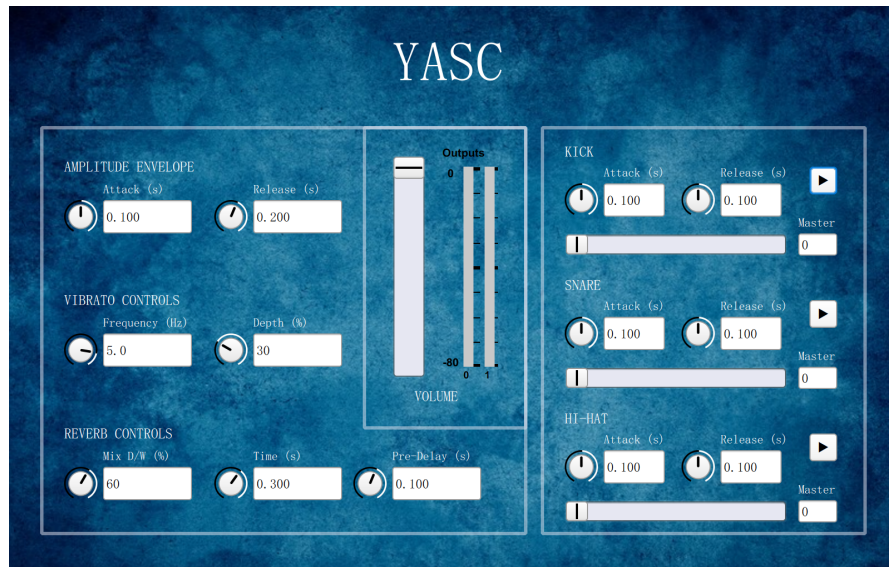


Figure 2: Sound synthesis

## 3 Implementation

### 3.1 Overall structure

In this structure(fig. 3), the system tracks users' interactions with Joy-Con controllers and use them as input. The web system acts as the center interface, providing users with an intuitive and interactive to set up and customize their performance experience. SuperCollider serves as the sound synthesis engine, generating the sounds according to the commands from web system via the Open Sound Control (OSC) protocol and providing detailed parameters for users to adjust.

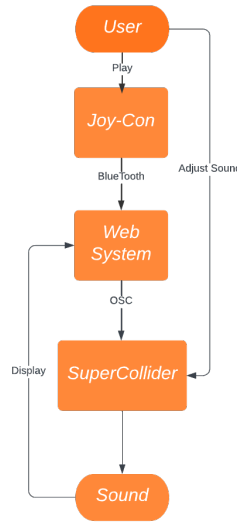


Figure 3: Overall structure

### 3.2 Web system

The web system mainly uses Websockets for fast communication and Meyda with Three.js for visualizations.

- *Web Socket*: it provide a persistent connection between the client and the server, allowing data to be transmitted as soon as it is available. This significantly reduces the delay between a

user’s action on the Joy-Con controller and the sound produced by SuperCollider.

- *Meyda and Three.js*: the Spectrum Page uses the Meyda library to perform audio feature extraction, which provides a spectrum analysis of the sounds generated by the user. The analysis data is then visualized using Three.js, which can help users visualize the frequency spectrum of their performance in real-time.

### 3.3 SynthDef *flute*

The SynthDef ”flute” emulates the sound of a recorder through digital waveguide synthesis. This model is based on Perry Cook’s one with the addition of a simple vibrato.

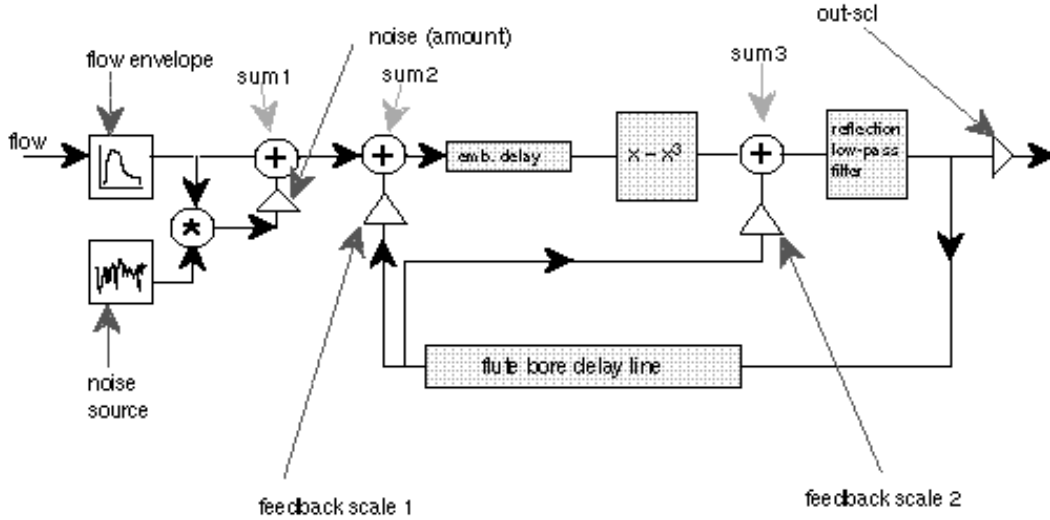


Figure 4: Perry Cook’s digital waveguide flute model

The procedure is summarized by the following steps:

- The first part of the sound (*sum1*) is generated through a clipped noise modulated by an envelope and summed with a low frequency sinusoidal oscillator to model vibrato.
- The second sound (*sum2*) is obtained as the sum of the first one and the actual output processed

by a cubic interpolated delay line (used for bore effect emulation, one period’s worth of samples long), modulated by a coefficient smaller than one (to prevent instability in the feedback loop).

- The second sound (*sum2*) is processed by another cubic interpolated delay line (used for embouchure effect emulation, half period’s worth of samples long) and the cubic polynomial  $x - x^3$  is computed for each sample: this result is then summed to the actual output (processed as described in the previous point) modulated by a new small coefficient (always smaller than one for the same reason stated before) to give the third sound (*sum3*).
- A low-pass filter is applied to the the third sound (*sum3*) (to emulate the faster decay of high frequencies) and the result is finally sent to the output.

### 3.4 SynthDef *kick*

## 4 Conclusions and further improvements

In conclusion, the system effectively captures users’ inputs, offers an intuitive interface for customization and practice, and generates rich, dynamic sounds, resulting in a novel and engaging user experience.

For the future work, some of the following ideas could be implemented:

- In order to further reduce the delay, use JUCE with WebSocket to replace SuperCollider.
- Explore the possibility of integrating with other motion-sensing devices or MIDI controllers, expanding the performance options.
- Implement a feature that allows users to record, save, and replay their performances.
- Offer more sophisticated sound parameters for users to manipulate, allowing for greater customization of the sounds generated by SuperCollider.
- The current recorder model uses a cubic non-linearity to simulate the effect of the mouthpiece. More accurate results might be achieved by incorporating higher-order non-linearities.