


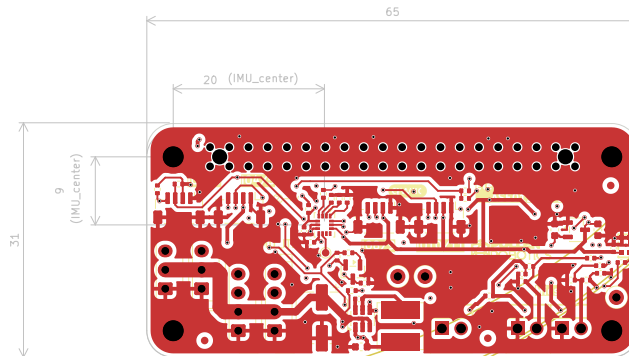

HATZ

top ----- signals
in1 ----- gnd
in2 ----- signals
bot ----- signals

1 mm PCB thickness
35 um (1 oz) copper

- PCB specifications (<https://jlcpcb.com/capabilities/pcb-capabilities>)
- Via/holes: 0.2/0.45 mm
 - Via Hole-to-Hole Spacing: 0.2 mm
 - Min. track width and spacing (35 um) 0.10 / 0.10 mm
 - Min. track width and spacing (70 um) 0.16 / 0.20 mm
 - Inner layer via hole/PTH to copper clearance: 0.2 / 0.3 mm



POLLEN
ROBOTICS



Pollen Robotics / Hugging Face

Sheet:

File: elec_RPI_Robot_HAT.kicad_pcb

Title: etec RPI Robot HAT

Size: A5

Date: 2026-10-06

KiCad E.D.A. 9.0.9

Rev: D1

Id: 1/1