


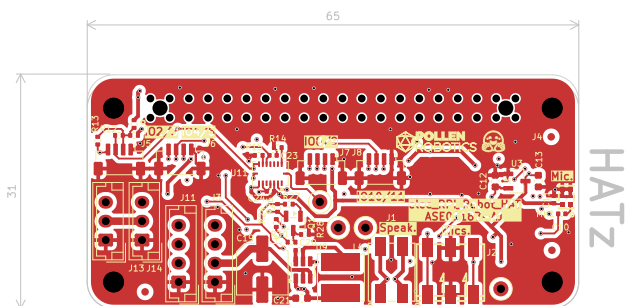

top ----- signals
 in1 ----- power
 //// CORE ////
 in2 ----- gnd
 bot ----- signals

1 mm PCB thickness
 35 um (1 oz) copper

PCB specifications (<https://lcpcb.com/capabilities/pcb-capabilities>)
 - via/holes: 0.2/0.45 mm
 - Via Hole-to-Hole Spacing: 0.2 mm
 - Min. track width and spacing (35 um) 0.10 / 0.10 mm
 - Min. track width and spacing (70 um) 0.16 / 0.20 mm
 - inner layer via hole/PTH to copper clearance: 0.2 / 0.3 mm

Pollen Robotics / Hugging Face

Sheet:

File: elec_RPI_Robot_HAT.kicad_pcb

Title: elec RPI Robot HAT

Size: A4

Date: 2026-02-23

Rev: A1

KiCad E.D.A. 9.0.7

Id: 1/1