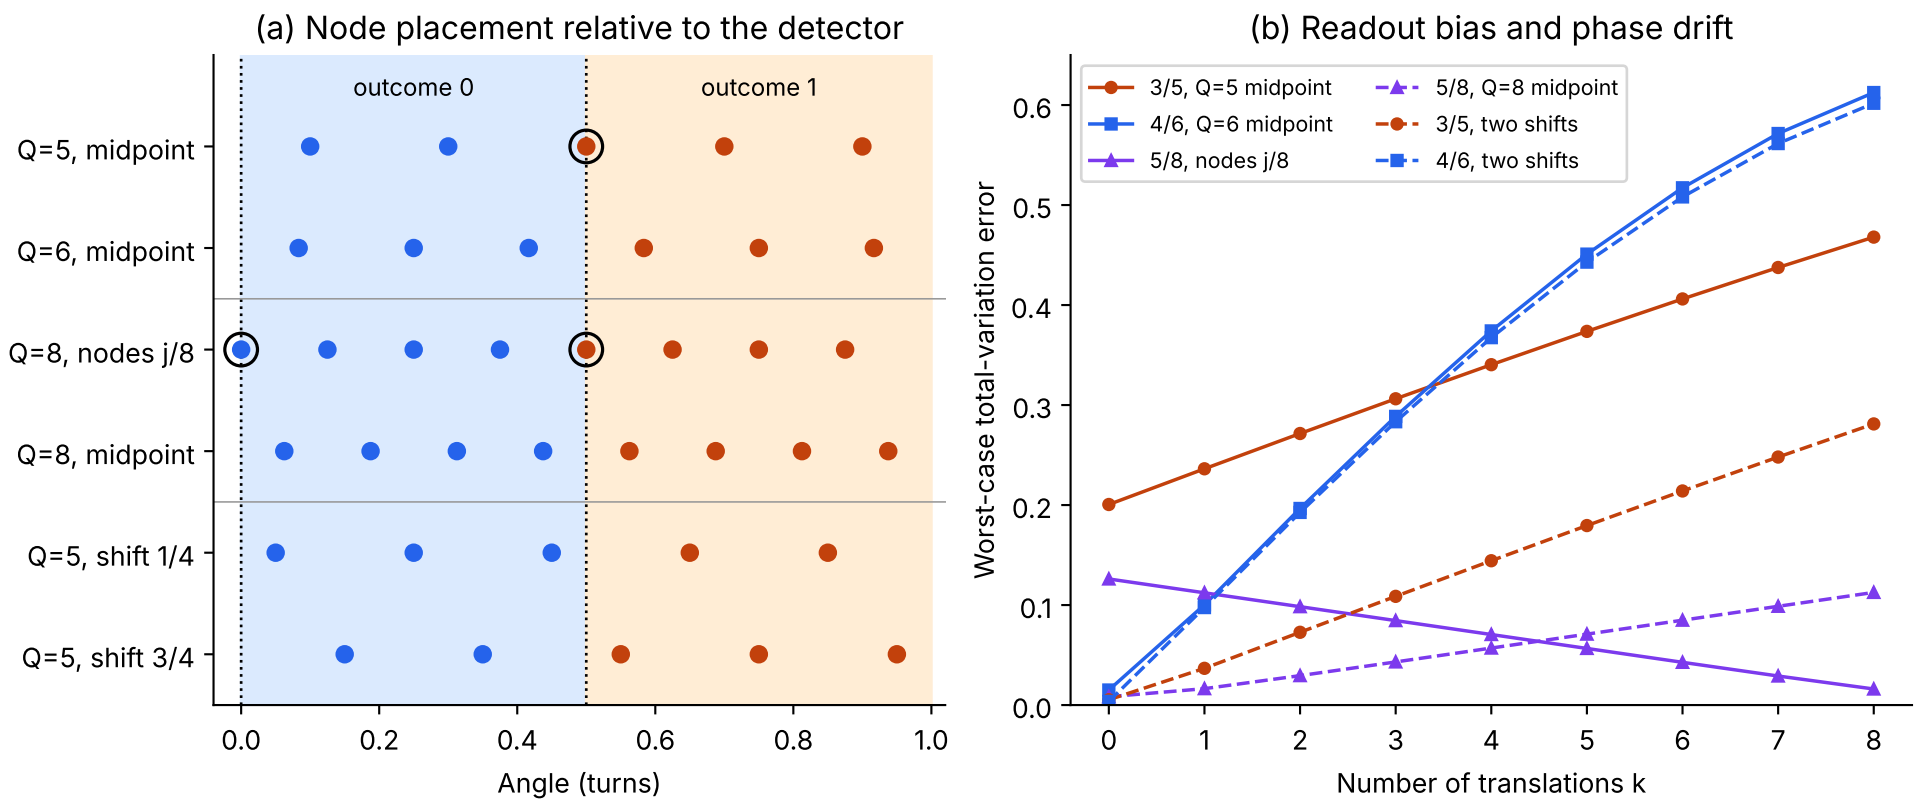
(a) Node placement relative to the detector
outcome 0
outcome 1
Q=5, midpoint
Q=6, midpoint
Q=8, nodes j/8
Q=8, midpoint
Q=5, shift 1/4
Q=5, shift 3/4
0.0
0.2
0.4
0.6
0.8
1.0
Angle (turns)
(b) Readout bias and phase drift
3/5, Q=5 midpoint
4/6, Q=6 midpoint
5/8, nodes j/8
5/8, Q=8 midpoint
3/5, two shifts
4/6, two shifts
Worst-case total-variation error
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0
1
2
3
4
5
6
7
8
Number of translations k