

ÉCOLLABO8 DECKING



THE MOST SUSTAINABLE AND DURABLE
DECKING SOLUTION
MADE FROM WASTE



WEATHERPROOF

Withstands rain, UV exposure, and extreme temperatures without warping or cracking, perfect for all climates.



FIRE-RESISTANT

Engineered with fire-retardant materials for enhanced safety in residential and commercial settings.



TERMITE-PROOF

Completely resistant to termite infestations, ensuring long-lasting performance without the need for chemical treatments.



ROT-PROOF AND DURABLE

Designed to resist rot, decay, and natural wear, maintaining structural integrity for decades.



COLOR-STAY TECHNOLOGY

Advanced pigmentation ensures vibrant colors that won't fade, even with prolonged sun exposure.



NO MAINTENANCE NEEDED


Unlike wood, there's no need for sanding, painting, or sealing, just install and enjoy!



WASTE-FREE PRODUCTION

Made entirely from recycled materials, contributing to a circular economy and reducing environmental impact.

PRODUCT SPECIFICATIONS

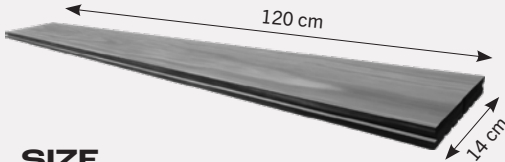

SIZE

Length	: 120 cm
Width	: 14 cm
Thickness	: 2 cm
1 ^{sqm}	: 6 Planks
Weight	: 5 kg

MATERIAL

Plastic bags, PP, multilayers sachet, recycled aggregate.

ECO IMPACT

Recycling 30kg of waste per sqm of decking produced.

Preventing deforestation of 35 hectares yearly.

REPORT OF TESTING



TEST METHOD

- ASTM D638-14
- ASTM D790-14
- ASTM D792-20
- ASTM D 570 - 98
- UL 94

Testing Condition

- Temperature : 24.5°C
- Humidity : 54%
- Equipment Test :
 - Analytical Balance
S/N IMIWH12-2204000405
 - Digital Caliper
S/N A15007746
 - Bunsen Burner
S/N 31/05
 - Universal Testing Machine
S/N 318

Test Item	Converted Result	
Tensile Strength	75.45928	kg/cm2
Elongation	5.4	%
Flexural Strength	148.063344	kg/cm2
Density	1.61	g/cc
Water Absorption	0.63%	
Fire Test		
- UL 94 HB	PASS (0mins/mm)	
- UL 94 Vertical	V-0	

COLOR OPTIONS



**CUSTOM COLORS
ARE AVAILABLE**
for orders of **300 sqm**
or more

ËCOLLABO8 DECKING IN COMPARISON

CATEGORY	ËCOLLABO8 DECKING	WOOD DECKING	WPC DECKING
Material Source	Made from low-value plastic waste and recycled aggregate.	Cut trees, leading to deforestation and habitat disruption.	Wood fiber and virgin plastic.
Sustainability	Eco-friendly, uses recycled materials. 	Contributes to deforestation and habitat disruption.	Contains new plastic and wood; less eco-friendly.
Durability	Resistant to fire, moisture, insects, decay, salt spray, and all weather conditions.	Prone to rot, decay, and insect infestations.	Prone to bending; fades and becomes brittle with sun exposure.
Maintenance	No maintenance; no painting or sealing needed.	Requires regular sealing and refinishing.	Needs periodic maintenance.
Cost-Efficiency	 More affordable upfront and requires no maintenance, ensuring significant cost savings over time.	 Higher upfront costs, especially for premium wood like Ironwood, with ongoing expenses for maintenance.	 Generally more expensive upfront with periodic maintenance and repairs adding to long-term costs.

REQUIRED ACCESSORIES



Starting Clips



Joint Clips
(Height 8mm, screw hole parts depth 10mm, insertion depth 6mm)



5cm Screws and S8 Fischers



3cm Screws


INSTALLATION GUIDE

INSTALLATION ON A CONCRETE SLAB USING ECOLLABO8 ECOPLANKS




Prepare the Concrete Slab

Ensure the concrete slab is level, clean, and dry. A stable, even surface prevents shifting and enhances EcoPlank durability.

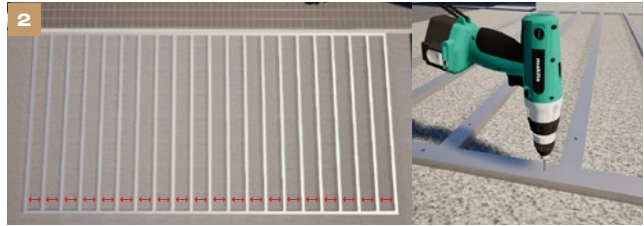

Position and Space Joists

Lay the joists (Joist 5 cm wide) across the slab with **25 cm spacing from edge to edge**. (22,5 for the First and last joist) This spacing provides the necessary support to prevent flexing in the EcoPlanks.

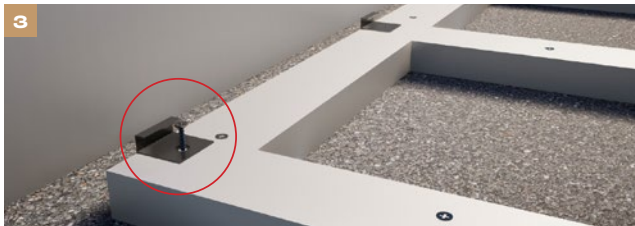

Install Starting Clips

Secure starting clips along the edge where the first EcoPlank will be installed, aligning them precisely to set a straight foundation.




Lay the First EcoPlank

• Place the first EcoPlank into the starting clips, ensuring it sits straight and level. • **Note:** ECOLLABO8 EcoPlanks have a thickness tolerance of ± 1 mm. If a plank appears uneven, use the small spacers provided by ECOLLABO8 under the plank to level it as needed, ensuring a smooth deck surface.



Secure EcoPlanks with Clips

• Position clips between each plank to maintain a consistent 3–5 mm gap. This gap allows for necessary expansion and ventilation. • As you proceed, double-check for evenness and add spacers as required to keep each plank flush with the others.

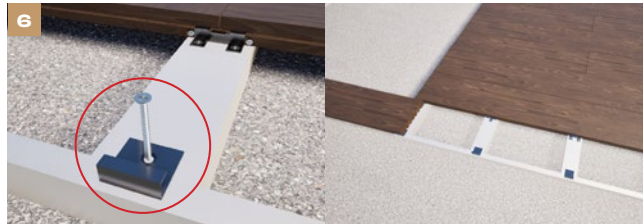

Finish with Starting Clips on the Final Edge

Secure the final EcoPlank with starting clips on the outer edge to complete the perimeter neatly.



Cover Exposed Edges with EcoPlank Fascia

Finish by attaching fascia boards or EcoPlanks along any exposed sides, fastening them to the joists for a polished, professional look.



Final Step: Smooth Finishing

Sand the decking surface with 80-grit sandpaper until it's smooth and clean, achieving a flawless, polished finish. No coating or varnish required.

+62 813 888 77 220

@ecollabo8

info@ecollabo8.com

www.ecollabo8.com



SCAN
FOR MORE
DETAILS