

# xnec2c-gao – A genetic algorithm optimizer for xnec2c

Maurizio Di Pietro DC1MDP


1. November 2022


## Contents


<b>1</b>	<b>Xnec2c-gao</b>	<b>1</b>
1.1	What is Xnec2c-gao . . . . .	1
1.1.1	Features . . . . .	2
1.2	In the Media . . . . .	2
1.3	Installing xnec2c-gao . . . . .	2
1.3.1	Install .deb package . . . . .	2
1.3.2	Building from source . . . . .	3
1.4	Why do we need an external optimizer for Xnec2c . . . . .	3
<b>2</b>	<b>Project structure analized by Devin AI</b>	<b>3</b>
<b>3</b>	<b>From .nec to .gao file</b>	<b>3</b>
3.1	SYM Card . . . . .	3
3.1.1	Using SYM Card symbols in your GW Cards . . . . .	4
3.2	GSYM Card . . . . .	4
3.2.1	Using GSYM Card symbols to “modulate” SYM Card symbols . . . . .	5
3.3	BND Cards . . . . .	5
3.4	Comments . . . . .	5
<b>4</b>	<b>From .gao file to .gao.nec files</b>	<b>6</b>
4.1	Running your optimization . . . . .	6
4.1.1	Important . . . . .	6
4.2	Fixing errors in gao file . . . . .	6
4.3	Output of xnec2c-gao . . . . .	7
<b>5</b>	<b>TODO</b>	<b>7</b>


## 1 Xnec2c-gao

xnec2c-gao v0.3.5

 Haskell CI passing

 Build Deb Package passing

 PDF Readme passing

 Ask DeepWiki

### 1.1 What is Xnec2c-gao

Xnec2c-gao is an external optimizer for the antenna modeling software Xnec2c written by Neoklis Kyriazis, 5B4AZ. It uses an genetic algorithm to find solutions in a multidimensional search space.

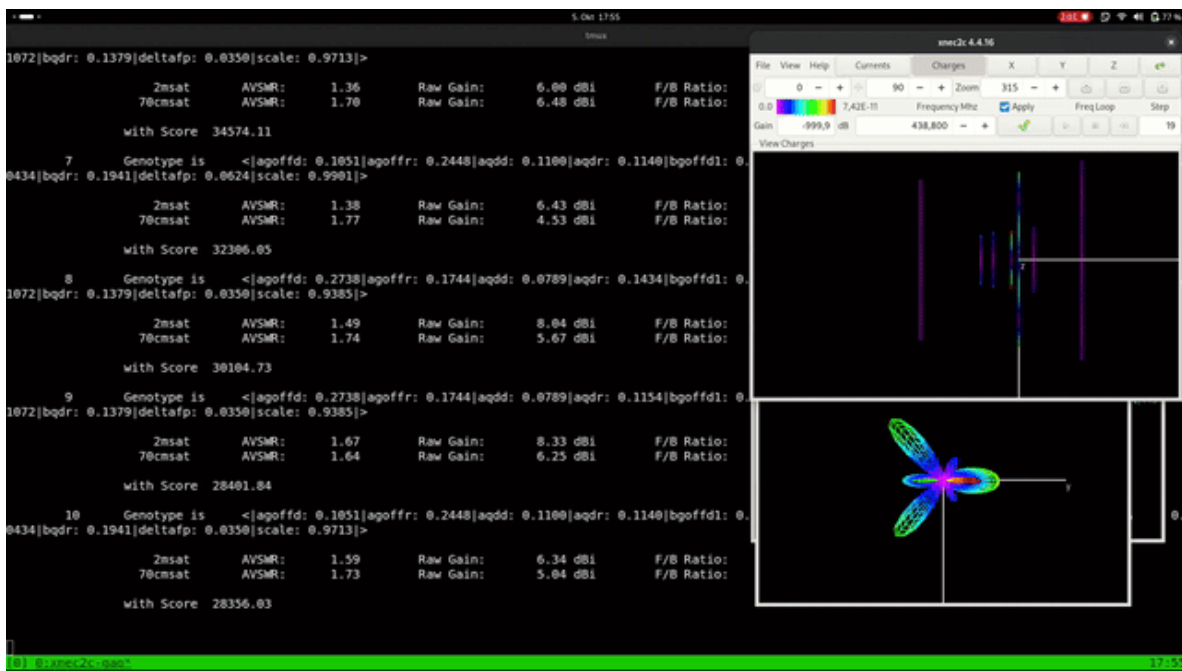


Figure 1: xnc2c-gao

### 1.1.1 Features

- automatically runs Xnc2c
- symbols in your model
- mathematic expression evaluation
- genetic algorithm control
- unlimited number of genes for genetic optimization
- ability to specify multiple “bands” as optimization targets
- one output nec file per survivor

## 1.2 In the Media

Onno (VK3FLAB) presents xnc2c-gao in Episode 523 of his wonderfull Podcast “Foundations of Amateur Radio”.

- Foundations of Amateur Radio Podcast
- Episode 523 about Xnc2c-gao

## 1.3 Installing xnc2c-gao

### 1.3.1 Install .deb package

To install

- download the .deb package from release page.
  - in your terminal run
- ```
$ sudo dpkg -i xnc2c-gao_<version>.deb
```

### 1.3.2 Building from source

To build from source

- download the .tar.gz package from release page.
- install haskell via ghcup
- in your terminal

```
$ tar xzvf xnec2c-gao_<version>.tar.gz
$ cd xnec2c-gao
$ cabal build
$ cabal install
```

This installs the binary `xnec2c-gao` to `$HOME/.cabal/bin`. Include this directory in `PATH`.

## 1.4 Why do we need an external optimizer for Xnec2c

Xnec2c is a high-performance multi-threaded electromagnetic simulation package to model antenna near- and far-field radiation patterns for Linux and UNIX operating systems. For Windows there are also two main descendants of the `nec2` code, `EZNEC` and `4NEC2`, that are capable of optimizing your antenna model. The author of Xnec2c introduced a optimization loop that uses external optimizing programs.

Neoklis, 5B4AZ explains Antenna Optimization in `xnec2c` on his page here as follows:

“Xnec2c monitors its `.nec` input file for changes and re-runs the frequency stepping loop which recalculates new data and prints to the `.csv` file. It is therefore possible to arrange the optimizer program to read the `.csv` data file, recalculate antenna parameters and save them to the `.nec` input file. `xnec2c` will then recalculate and save new frequency-dependent data to the `.csv` file.

If the optimizer program is arranged to monitor changes to the `.csv` file, then a continuous loop can be created in which new antenna parameters are calculated and saved to the `.nec` file, new frequency dependent data are calculated and saved to the `.csv` file and the loop repeated until the desired results (optimization) are obtained.”

## 2 Project structure analized by Devin AI

Here you can find information regarding the inner workings of this project, analized and provided by AI.

- AI generated overview

## 3 From .nec to .gao file

A `.gao` file is essentially a `.nec` file with special “SYM” and “GSYM” cards. With those new cardtypes it is possible to genralize your `nec` model so the optimizer can generate a whole class of concrete `nec` models and test them for fitness.

### 3.1 SYM Card

The SYM Card allows you to bind a expression to a name. After the SYM Card the defined symbol can be used in arithmetic expressions to calculate antenna parameters. A SYM Card is defined as:

**Sym symbolname := <expr>**

where <expr> is a mathematical expression consisting of Float/Integer literals, identifiers and operators +, -, \*, /, ^, (, ), SQRT, LOG, SIN, COS.

So you could define the speed of light as :

**Sym c := 300000**

and your desired frequency as :

**Sym freq := 145800**

you can use previously defined symbols in the rhs of a Sym Card

**Sym vf := 0,96**

**Sym lambda := vf \* c / freq**

**Sym lambdaq := lambda / 4**

### 3.1.1 Using Sym Card symbols in your GW Cards

To define a dipole you would define a GW Card for the radiator like :

**GW 1 15 -0,49 0 3,92 0,49 0 3,92 0,01**

instead of using concrete values using Sym symbols makes this definition more general:

**Sym height := 2,0 \* lambda**

**Sym radius := 0,01**

**GW 1 15 -lamdaq 0 height lamdaq 0 height radius**

It is also possible to use the expression syntax in the GW Cards fields :

**Sym center := 0,0**

**Sym height := 2,0 \* lambda**

**Sym radius := 0,01**

**GW 1 15 center-lamdaq 0 height center+lamdaq 0 height radius**

By itself Sym Cards give you only the ability to adapt your model easily to different circumstances. For example to make the 2m-dipole model a dipole for the 10m band, you would only need to change the Sym freq card to reflect the new 10m band frequency.

**Sym freq := 28480**

For xnec2c-gao to be able to optimize this model with an genetic algorithm, we need the ability to define Genes which are implemented as GSYM Cards.

## 3.2 GSYM Card

The GSYM Card represents essentially a gene in the genetic algorithm used to optimize your antenna model. You can define any number of GSYM Cards each represents a dimension in a multidimensional search space. That's why I designed the optimizer as a genetic algorithm, because linear approximation works good for low dimensional search, whereas genetic algorithms have their strength in multidimensional domains.

The Syntax of a GSYM Card is:

**GSYM symbolname := [<low>...<high>]**

where <low> and <high> are floating point numbers and low < high.

So to check what radius gives best VSWR/GAIN one would replace the definition of radius from above from:

```
SYM radius := 0,01
```

to

```
GSYM radius := [0,001...0,02]
```

to check radii in the range of 1mm to 2cm.

### 3.2.1 Using GSYM Card symbols to “modulate” SYM Card symbols

To vary the parameters defined in terms of SYM cards you can use the GSYM symbols in the SYM definition.

```
GSYM scale := [0,5...1,5]
```

```
SYM lambda := scale * vf * c / freq
```

## 3.3 BND Cards

In x nec2c frequency ranges are specified as one or more FR Cards. You can use these and x nec2c-gao will automatically sweep over the bands they define and does calculation of fitness for all obtained steps. However if for example you specify two FR Cards for antenna model which isn't resonant on both bands, the AVSWR calculation shows a distorted reading of the average over data points from both bands, resonant and non resonant. This makes it somewhat harder for the algorithm to rate the variations of the model and hence to produce good results fast.

To prevent this and help the algorithm optimizing your model we have BND Cards in the form :

```
BND <label> <lowfreq> <highfreq> <steps>
```

for 2m ham band it would be:

```
BND 2m 144,000 146,000 10
```

Each BND card instructs x nec2c-gao, to run for each BND Band in isolation for each variant of your model. In presence of BND Cards, FR Cards are not considered in optimization. On the resulting output .nec files, only the original FR Cards are included , BND Cards disappear.

So you could have a FR card that sweeps the entire HF band from 3.5 MHz to 30 MHz and several BND Cards for only the HAM Bands. That would instruct x nec2c-gao to optimize for the HAM Bands and if you run the winner .nec files with x nec2c, it will show the performance for the entire 3.5 MHz to 30MHz range.

The fewer and narrower the BND Cards are the faster x nec2c-gao will run. Also the with <steps> specified count of calculation points, will speed up the calculation if <step> is lower. So you could also define one FR Card that sweeps the 2m band very detailed, and a BND Card for 2m Band that has only a few steps, to make optimization fast and final display detailed.

Example : examples/awx/

## 3.4 Comments

Lines beginning with hash (#) and exist anywhere in the file. These are inline comments. They are passed though unmodified and ignored by x nec2c / nec2c.

```
# this is a comment
```

```
SYM freq := 145800
```

## 4 From .gao file to .gao.nec files

After you prepared your .gao file for your antenna model, you can invoke the optimizer. To get a brief overview how to run the optimizer run:

```
$ xnec2c-gao --help
```

This will yield:

```
xnec2c-gao - a genetic algorithm optimizer for your antenna model
```

```
Usage: xnec2c-gao [--version] (-f|--gaofile FILENAME) [-v]
        [-d|--select-distinct] [-s|--population-size INT]
        [-c|--generation-count INT] [-o|--optimization-mode omode]
        [-y|--directional-mode dmode]
```

Run an optimizer for GAOModel FILENAME

Available options:

|                              |                                                                                                     |
|------------------------------|-----------------------------------------------------------------------------------------------------|
| -h,--help                    | Show this help text                                                                                 |
| --version                    | Show version                                                                                        |
| -f,--gaofile FILENAME        | GAO Model to optimize                                                                               |
| -v                           | How verbose to optimize (can be specified multiple times)                                           |
| -d,--select-distinct         | Select only distinct individuals as survivors                                                       |
| -s,--population-size INT     | How many individuals are in one generation (default: 20)                                            |
| -c,--generation-count INT    | How many generations to run the optimizer (default: 10)                                             |
| -o,--optimization-mode omode | What should we optimize for: vswr, gain, vswr+gain (default: vswr+gain)                             |
| -y,--directional-mode dmode  | Are we optimizing a symmetrical or directive antenna: symmetrical, directive (default: symmetrical) |

Copyright 2022 Maurizio Di Pietro DC1MDP. Program is provided "as is". Author is not responsible for any havoc caused by the usage of this software. Use at own risk.

### 4.1 Running your optimization

So to execute your optimization invoke:

```
$ xnec2c-gao -d -f dipole.gao
```

#### 4.1.1 Important

Check Xnec2c “Optimization Settings”. Make sure to watch for .nec file changes and output .csv .

### 4.2 Fixing errors in gao file

```
$ xnec2c-gao -d -f dipole.gao
```

This will read your .gao file and report any syntactic errors in the .gao file. With the provided line number and the description what was found and what was expected it should be, more or less, straightforward to fix errors.

If for example you defined :

```
SYM vk := 0.96
```

and run

```
$ xnec2c-gao -f dipole.gao
```

output would be

```
dipole.gao:6:12:
|
6 | SYM vk := 0.96
|               ^^
unexpected ".9"
expecting crlf newline, end of input, end of line, or newline
xnec2c-gao: Abort
```

This error doesn't indicate that you used the wrong number delimiter , but at least it indicates where to look.

### 4.3 Output of xnec2c-gao

xnec2c-gao will run for n generations and present you the evolved survivors, you can choose to continue optimizing or if you are satisfied quit the optimization in which case xnec2c-gao will write one .nec file for each survivor. The filename of the necfile will also contain the AVSWR calculated by xnec2c.

## 5 TODO

- examples are not clean
- genetic parameters command line options
- sanity checks for radius, segment length, ratios
- verbosity logging
- ....