Exp No: 10 (a) Internetworking with routers in cisco packet tracer.


28/09/26

Aim:

To design and configure a simple networking using a router and establish communication between two different networks.

PROCEDURE:

1. Open cisco packet tracer and place one router and two pcs in workspace.
2. configure R1 G0/0 with:
   IP: 192.168.10.1
   subnet mask: 255.255.255.0
3. configure R1 G0/1 with:
   IP: 192.168.20.1
   subnet mask: 255.255.255.0
4. Enable both router interfaces using no shutdown command.
5. configure PC0 with:
   IP: 192.168.10.2
   subnet mask: 255.255.255.0
   Gateway: 192.168.10.1
6. configure PC1 with:
   IP: 192.168.20.2
   subnet mask: 255.255.255.0
   Gateway: 192.168.20.1
7. Test connectivity by pinging from PC0 to PC1 using: 192.168.20.2.
8. Switch to simulation mode & send a PDU from PC0 to P1.

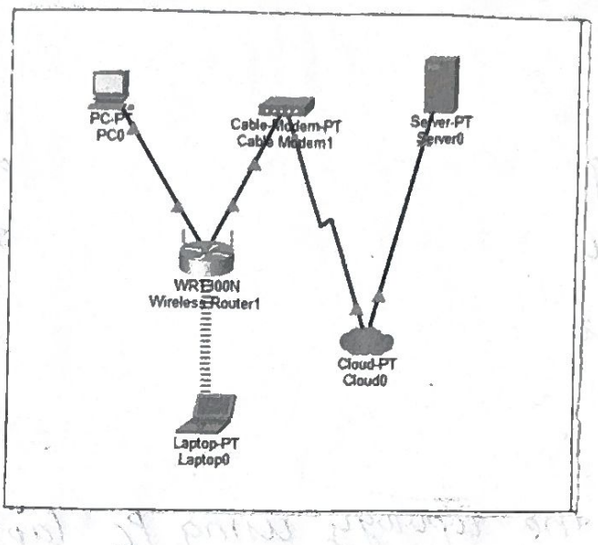


```
C:\>
C:\>ping 208.67.220.220

Pinging 208.67.220.220 with 32 bytes of data:

Request timed out.
Reply from 208.67.220.220: bytes=32 time=1ms TTL=127
Reply from 208.67.220.220: bytes=32 time=1ms TTL=127
Reply from 208.67.220.220: bytes=32 time=1ms TTL=127

Ping statistics for 208.67.220.220:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\>ping cisco.com

Pinging 208.67.220.220 with 32 bytes of data:

Reply from 208.67.220.220: bytes=32 time=1ms TTL=127
Reply from 208.67.220.220: bytes=32 time=2ms TTL=127
Reply from 208.67.220.220: bytes=32 time=1ms TTL=127
Reply from 208.67.220.220: bytes=32 time=1ms TTL=127

Ping statistics for 208.67.220.220:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 2ms, Average = 1ms
```

RESULT:

Thus, a simple internetwork was successfully configured using router, & communication between PC0 and PC1 was verified.