Exp No: 11 (b) RIP USING CISCO PACKET TRACER

29/09/26

AIM:


To implement dynamic routing using RIP in cisco packet tracer and verify automatic route and rerouting.

THEORY:

RIP is a distance vector protocol that uses hop count to select routes. It automatically updates routing information when network topology changes.

PROCEDURE:

1. create a network with 3 routers and 2 PCs.
2. configured IP address on pcs and router interfaces.
3. Enabled all required route using no shutdown.
4. Tested connectivity between PC0 and PC1 using ping.
5. Used tracert to verify route selected by RIP.
6. Disconnected direct Router0 - routers link.
7. verified RIP automatically sleched alternate path through Router1.

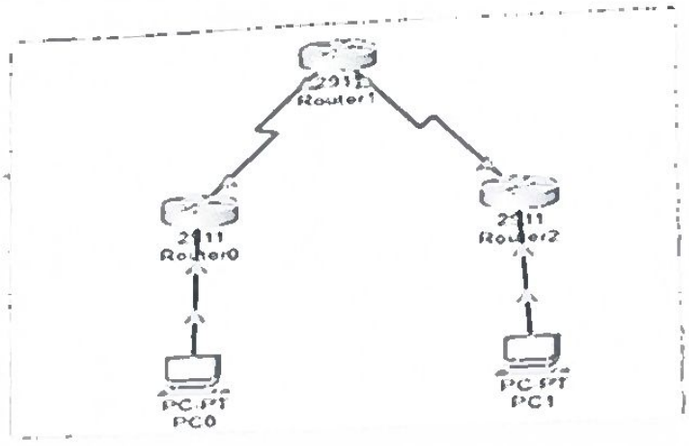


```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.30.1

Pinging 192.168.30.1 with 32 bytes of data:

Reply from 192.168.30.1: bytes=32 time=1ms TTL=255
Reply from 192.168.30.1: bytes=32 time<1ms TTL=255
Reply from 192.168.30.1: bytes=32 time<1ms TTL=255
Reply from 192.168.30.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.30.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.168.30.3

Pinging 192.168.30.3 with 32 bytes of data:

Reply from 192.168.30.3: bytes=32 time<1ms TTL=128
Reply from 192.168.30.3: bytes=32 time<1ms TTL=128
Reply from 192.168.30.3: bytes=32 time<1ms TTL=128
Reply from 192.168.30.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.30.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.30.4

Pinging 192.168.30.4 with 32 bytes of data:

Reply from 192.168.30.4: bytes=32 time<1ms TTL=128
Reply from 192.168.30.4: bytes=32 time<1ms TTL=128
Reply from 192.168.30.4: bytes=32 time<1ms TTL=128
Reply from 192.168.30.4: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.30.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

RESULT:

Thus, RIP dynamic routing was sucessfully implemented in cisco packet, and automatic route selection and rerouting were verified.