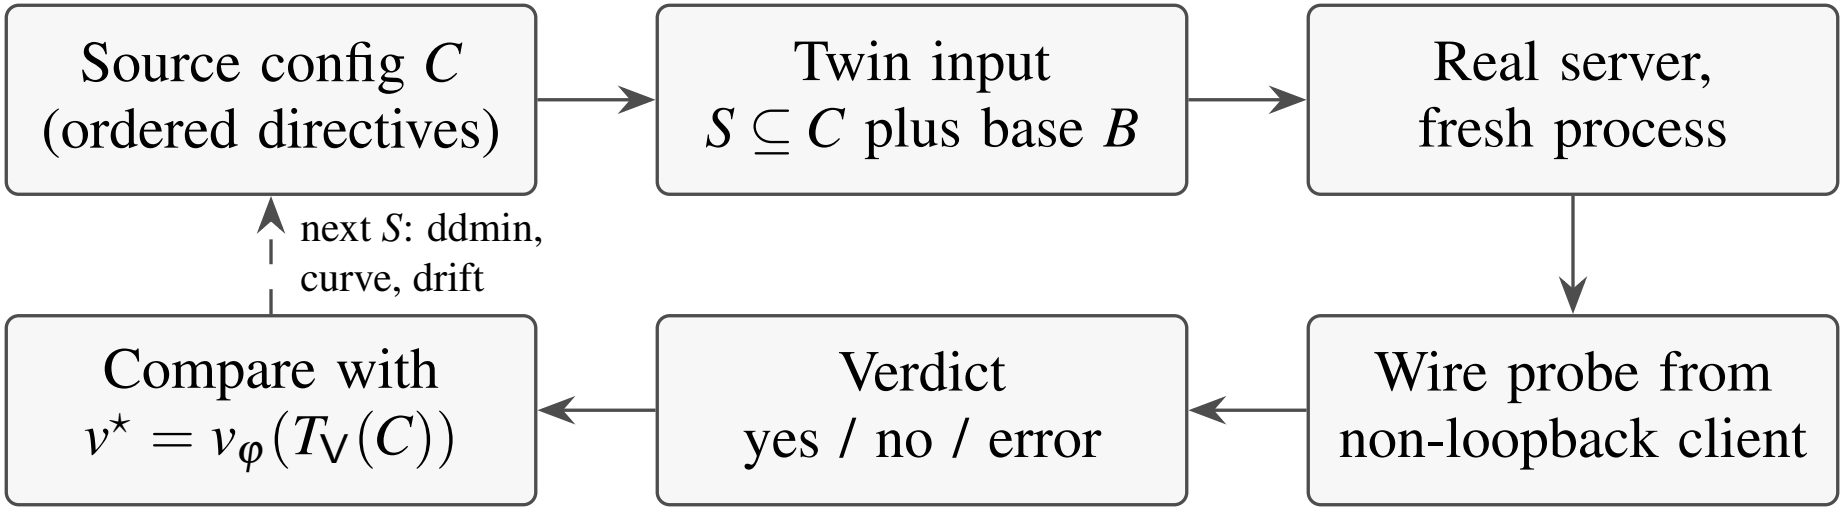

Source config C
(ordered directives)
Twin input
$S \subseteq C$ plus base B
Real server,
fresh process
Wire probe from
non-loopback client
Verdict
yes / no / error
Compare with
$v^\star = v_\varphi(T_\mathrm{V}(C))$
next S: ddmin,
curve, drift