


Boald Drawing 10/31/2014 12:24:17 PM

Symbol	Hit Count	Finished Hole Size	Plated	Hole Type	Physical Length	Rout Path Length
0	2	1.800mm (70.87mil)	NPTH	Slot	2.600mm (102.36mil)	0.800mm (31.50mil)
▽	4	2.200mm (86.61mil)	NPTH	Round		
0	5	1.000mm (39.37mil)	PTH	Round		
	8	0.900mm (35.43mil)	PTH	Round		
*	32	0.610mm (24.00mil)	NPTH	Round		
×	122	0.305mm (12.01mil)	PTH	Round		
	173 Total					

Layer	Name	Material	Thickness	Constant	Board Layer Stack
1	Top Overlay				
2	Top Solder	Solder Resist	O. 010mm	3.5	
3	TopLayer1	Copper	0.070mm		
4	Dielectric 1	FR-4	0.120mm	4.8	
5	MidLayer2	Copper	0.035mm		
6	Dielectric 3	FR-4	1.130mm	4.2	
7	Ground Plane	Copper	0.035mm		
8	Dielectric 4	FR-4	0.120mm	4.2	
9	BottomLayer4	Copper	0.070mm		
10	Bottom Solder	Solder Resist	O. 010mm	3.5	
11	Bottom Overlay				

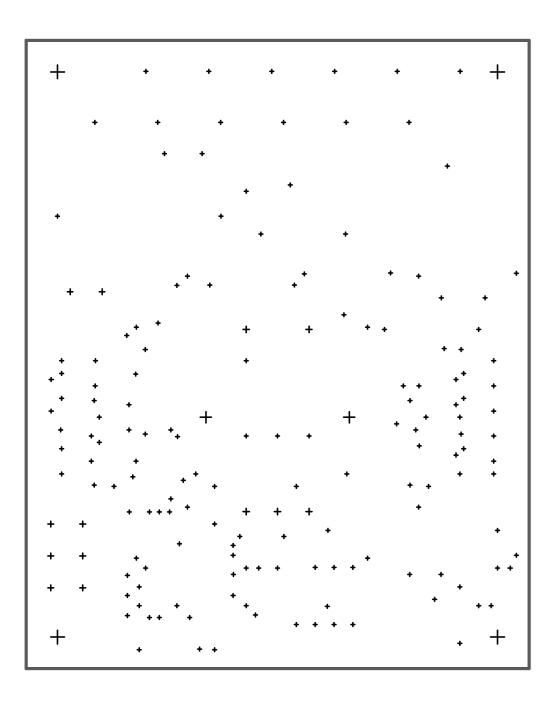

Boahld Gluitdeine 10/31/2014 12:24:18 PM