




BOREWELL PROTECTION




Patented Wirelock Mechanism
For Pump Safety



uPVC CASING PIPE



uPVC SCREEN PIPE



uPVC COLUMN PIPE

GESCO

ABOUT US

GESCO was formed in 2019 with a vision to become a leading manufacturer of Screen Pipes, meeting the growing demands of various industries through sustainable growth and innovation.

Today, GESCO is a trusted name in uPVC Screen Pipe manufacturing. Our head office is strategically located in Dubai, and warehouse facilities in Sharjah, UAE, serving as a supply hub for the MENA region. We design, develop, manufacture, and test high-quality screen pipe solutions tailored to client needs.

Our strong engineering team and skilled workforce maintain tight operational control, ensuring **precision, reliability, and consistent quality** in all our products.

Experienced engineers and technical professionals lead our operations, ensuring **on-time delivery**, strict **quality control**, and full compliance with **health, safety, and environmental standards**.

We specialize in manufacturing a wide range of **uPVC Screen Pipes**, including:

- Plain Pipes
- Slotted Screen Pipes
- Ribbed Screen Pipes
- Casing Pipes
- Deep Bore Well Pipes
- Column pipe

Our facility is equipped with the latest **pipe processing and testing machinery**, ensuring every product meets international standards. We also maintain **dedicated storage areas** for screen pipe components and other sensitive materials to ensure product integrity at every stage.





**SAVES LABOUR
& INSTALLATION COST**



**SUPERIOR CHEMICAL
RESISTANCE**



**ENSURES HIGHER
FLOW**



MAINTENANCE FREE



LONG LIFE

**Gesco Casing Pipe Are
Perfect For Bore-well
Application & Last The Longest**

CASING PIPE



GESCO

GESCO

GESCO

GESCO

GESCO

GESCO

UPVC CASING PIPES

Tensile Strength

The tensile strength required can be calculated on the basis of the pipe weight. In addition to the pipe weight, gravel that gets stuck on the joints during the assembly and settlement phase should be considered in design calculations. The lower load bearing capacity of screen pipes with slots should also be considered when the screen pipes are installed at multiple locations in a deep well. General recommendations on the admissible laying depth of the pipes therefore are not possible. It is imperative to assess the respective loads for each individual project.

Resistance to External Pressure

In order to determine the admissible laying depth of the well pipes, it is necessary to establish the load bearing capacity of the joints and the resistance to the external pressures. In practice, possible external pressures depend on several factors and some of those pressures cannot be quantified. Major external pressures are observed while laying the well pipes, gravel packing, sealing the annular spaces, developing the well or when pumping (due to larger differences in water level). The effect of such pressures cannot be precisely determined.

When sinking pipes through clay layers, additional compressive forces are exerted due to swelling clays. This can happen at any depth and in extreme cases may cause considerable strain on the material surface. The values indicated in the tables of this brochure are based on the minimum wall thickness of the pipes, their diameters and material composition.

Impact of Temperature

Temperature conditions prevailing during the laying of PVC-u well pipes will influence the mechanical properties of the material. High temperature between 30°C and 40°C as indicated by the creep strength in relation to time, the PVC-u material properties provide sufficient safety factor for the intended use. It is however important to determine the other influences while encasing the well pipes with Portland cement mixed with 5% bentonite to seal the drill holes. Temperature increases can be caused by the hydration heat of concrete. Calculations however show that these temperatures do not normally exceed 15°C, with the temperature of unset concrete reaching approx. 18°C, the temperature within the seal will be slightly more than 30°C and that is within the optimum limits.

Material


PVC-u, unplasticised polyvinyl chloride is the most ideal material for manufacturing well pipes as it is impervious to corrosion and chemical action, easy to handle and install, light in weight, non toxic, non conductive. Its long service life makes it an economical choice over other materials. Selection of right polymer grades, additives and stabilizing agents are an important criteria to produce a quality product and Jains lay special emphasis on this. The pipes produced by Jains are suitable for potable water application.




Thread Joints

A" Pipe thread, DIN 4925/ IS 12818

T" Trapezoidal thread, DIN 4925/ IS 12818

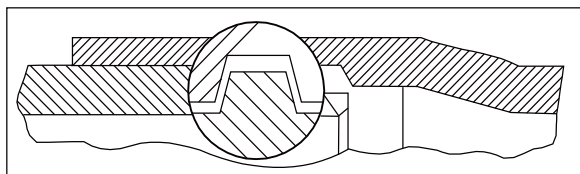

T" Trapezoidal thread according to IS 12818 & DIN 4925 Part 2 and 3, pitch 12mm, ON 250-400

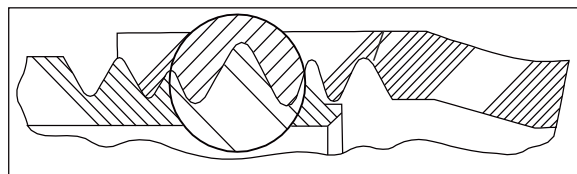

A" Pipe thread (Whitworth pipe thread) according to DIN 4925 Part 1, with reference to DIN 2999 Part 1, cylindrical internal thread and taper external thread, pitch 11 threads per inch, ON 35-100 and IS 554:1985 for ON 40 to ON 80

uPVC Casing Pipes – Technical Excellence

GESCO's casing pipes are used in borewell structures where soil integrity, groundwater quality, and long-term durability are paramount. Our pipes are manufactured to resist hydraulic collapse and provide excellent tensile strength for deep bore operations.

We offer slotted and plain casing options that cater to various hydrogeological conditions. Our pipe threading technology ensures fast installation, minimal leakage risk, and maintenance-free operation for decades.

Our casing pipes come with options for Sure-Loc or Trapezoidal threaded joints, available in diameters from 200 mm to 400 mm with slot widths from 0.2 mm to 3 mm.

Unique Selling Propositions (USP):

- Trapezoidal threads ensure secure, leak-proof joints
- High resistance to corrosion and chemical attack
- Smooth internal surface reduces hydraulic friction
- Long service life with minimal maintenance
- Available in wide diameters with custom slotting options

Applications

Domestic Wells: For safe, clean water supply.

Agriculture: Efficient irrigation solutions.

Industrial Mining: Withstands chemically aggressive and abrasive conditions.

Borewell Casing: Protects water lines from soil and rock pressures.





UPVC SCREEN PIPE



GESCO

We Control the Flow

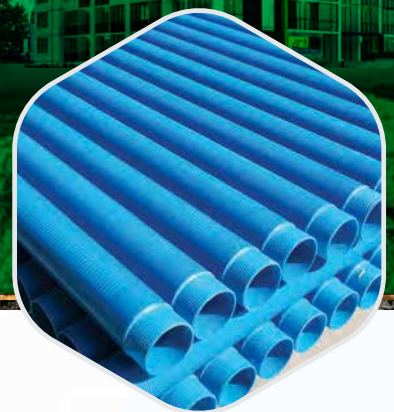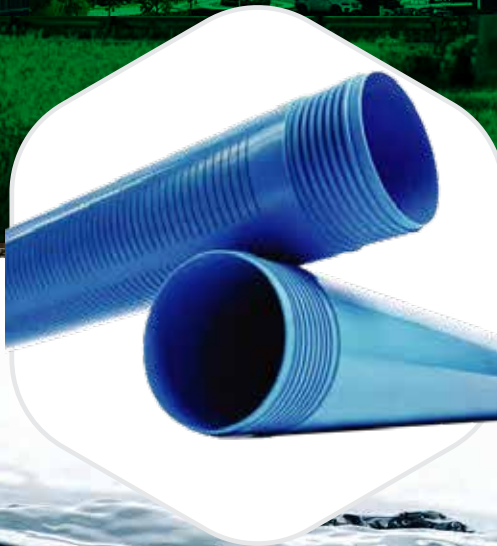

GESCO SHALLOW WELL PLAIN CASING CONFORMING TO IS 12818

CS-PC						
Nominal Diameter inch		Outside Diameter mm		Wall Thickness mm		Outer Diameter Over Socket mm Max.
INCH	MM	Min.	Max.	Min.	Max.	
6	150	165	165.4	5.7	6.5	174
7	175	200	200.5	7	7.8	211
8	200	225	225.5	7.6	8.8	238
10	250	280	280.5	9.6	11	292
12	300	330	330.6	11.2	13.3	346
14	350	400	400.7	14	15.5	420
16	400	450	450.8	16	17.5	470

GESCO SHALLOW WELL PLAIN CASING CONFORMING TO IS 12818 AND DIN 4925

CM-PC						
Nominal Diameter inch	Outside Diameter mm		Wall Thickness mm		Outer Diameter Over Socket mm Max.	Collapse Resistance K.g / Cm2
	Min.	Max.	Min.	Max.		
4	113	113.3	5	5.7	120	7.5
4.5	125	125.4	5	5.7	131	7.5
5	140	140.4	6.5	7.3	150	7.5
6	165	165.4	7.5	8.5	177	7.5
7	200	200.5	8.8	9.8	215	7.5
8	225	225.5	10	11.2	243	7
10	280	280.5	12.5	14	298	7

GESCO SPECIAL SERIES DEEPWELL PLAIN CASING PIPES

CD-PC						
Nominal Diameter inch	Outside Diameter mm		Wall Thickness mm		Outer Diameter Over Socket mm Max.	Collapse Resistance K.g / Cm2
	Min.	Max.	Min.	Max.		
6	165	165.4	9.5	10.5	182	15.5
8	225	225.5	13	14.2	249	15.5
10	280	280.5	16	18	306	15.5

Advantages of Gesco uPVC Well Screen & Casing V/S Metal Casing & Screen pipe.

METAL CASINGS AND SCREENS

- Due to local action and corrosive soil nature the life of tube well is as low as two years.
- Slot openings get enlarged and silting starts due to erosion in the screens.
- More than 50% of slot opening is obstructed by filtering media (Gravel Pack) hence low permeability.
- Screen slot widths cannot be made to suit aquifer sieve analysis for proper design of the well this cannot be avoided.
- Metal casing and screens are heavy, thus making installation cumbersome and tedious.
- Metal casings require special equipments like welding sets and generator sets for assembly and erection.
- Due to its weight, verticality cannot be maintained.
- Metal casing and screen are expensive.

Tube wells with metal pipes cannot be treated with chemicals to revive the clogged wells

uPVC WELL CASINGS AND RIBBED SCREENS

- GESCO WELL CASINGS AND RIBBED SCREENS are manufactured out of quality PVC compound. PVC being inert material, GESCO WELL CASINGS AND RIBBED SCREENS are totally unaffected by corrosion.
- Slot openings are not subjected to erosion hence they do not offer any resistance to flow.
- GESCO SCREENS are manufactured with slot widths ranging from 0.2mm to 3mm to suit the aquifer sieve analysis which helps engineers to design the well to give better life and yield.
- The Specific gravity of PVC being 1.4, GESCO CASINGS and SCREENS weigh only 115th of steel casings and screens. This makes it easier to handle and install.
- GESCO CASINGS AND RIBBED SCREENS are manufactured with socket and spigot ends with suitable locking, which require no special equipments to assemble and install.
- GESCO WELL CASINGS AND RIBBED SCREENS are supplied with centering guides to maintain verticality of the well.
- Total installation with GESCO WELL CASINGS AND RIBBED SCREENS will be substantially cost effective when compared with conventional mild steel casings and screens.
- Tube wells with uPVC casing pipes can be chemically treated to revive the clogged wells.

PVC-u Casing Pipes Accessories

The following accessories, adaptors and transition fittings in various sizes and types of joints are available to complete well installation



End Cap



Reducer



Centering Guide




Top Cap



LiftingCap



Wooden Clamp



Split Clamp



Transition Fittings



**QUALITY
RELIABILITY
DURABILITY**

make it the ideal pipe
for borewell application



uPVC High Impact Column Pipe for Submersible Pumps

Choosing a **GESCO** uPVC Column pipe from an ISO 9001:2015 registered company can provide assurance that the pipe meets certain quality standards and has been manufactured under a controlled process. However, it is always important to ensure that the pipe meets the specific requirements of your application and is installed correctly by qualified

Size (Inch)	MM (NB)	Outer Diameter	Type of Pipe	Max Depth of Installation (Feet)	Safe Pulling Load (Chain Pulley)	Safe Allow Hydrostatic Pressure (KGF/CM ²)
1"	25	33.40±0.10	ECO	200	550	16
			MED	300	770	21
			STD	600	1300	30
1 ¼"	32	42.16±0.13	ECO	200	850	15
			MED	300	1100	21
			STD	500	1500	25
			HVY	900	2000	35
1 ½"	40	48.26±0.15	ECO	250	1100	15
			MED	350	1300	21
			STD	650	1700	27
			HVY	900	2000	35
2"	50	60.20±0.15	ECO	200	1000	13
			ECO +	200	1200	13
			MED	350	1500	17
			STD	650	2100	21
			SUP. STD	800	2500	28
			HVY	900	2850	32
			SUP. HVY	1000	3250	32
			SUP. HVY	1200	3450	37
2 ¼"	53	63.10±0.16	STD	600	2100	20
			HVY	900	2900	28
			SUP. HVY	1200	3500	37
2 ½"	65	76.10±0.18	ECO	200	1700	12
			MED	300	1900	14
			STD	600	2700	21
			HVY	900	4200	32
			SUP. HVY	1000	4800	32
			SUP. HVY	1200	5200	37
3"	80	88.90±0.20	ECO	200	2300	10
			MED	300	2750	12
			STD	500	4000	17
			HVY	850	5950	26
			SUP. HVY	1100	6500	37
4"	100	113.20±0.25	ECO	200	3800	9
			MED	300	4100	11
			STD	500	5800	16
			HVY	850	9300	26
			SUP. HVY	1100	11500	37
5"	125	140.0±0.25	STD	520	9700	17
			HVY	850	14800	27
6"	150	165.0±0.025	STD	500	15500	17
			HVY	800	24500	27

Column Pipe

High-Quality Processing

Gesco Pipe utilizes **biaxially oriented extrusion technology**, ensuring superior durability and high tensile strength for optimal performance under demanding conditions.

Premium Material - Polyvinyl Chloride (PVC)

Crafted from **Polyvinyl Chloride (PVC)**, these pipes are engineered to be **lightweight, tough, and user-friendly**, offering the perfect balance of strength and ease of installation.

Optimized Manufacturing for Enhanced Longevity

Manufactured with **carbide-coated screw tooling** and subjected to a specialized **annealing process**, Gesco Pipes are optimized for performance, reliability, and extended service life.

Versatile & Robust Design

Designed with versatility in mind, these pipes can **withstand high-pressure applications and large depths**, ensuring they perform reliably in a variety of environments.

Superior Tensile & Mechanical Strength

Gesco Pipes are designed to endure high pressure and mechanical stress, offering exceptional load-bearing capabilities and unmatched resistance to external pressures.

Innovative Thickness Design

The **Thin & Thick Wall Technology** enhances pipe ends by adding strategic wall thickness to counteract stress and improve load-bearing capacity caused by pipe threading. This design is applied across all sizes to align with working conditions and load factors.

Safe for Deep-Well Applications

Gesco's uPVC pipes are specifically designed to operate reliably at depths of up to 1,400 feet, ensuring safety and performance even under extreme conditions.

Advanced Features for Maximum Reliability

Square Threads

- Manufactured with precision CNC machines, these unique square threads ensure optimal grip and additional tensile strength.
- They provide a high safety factor, supporting the weight of the pump assembly and entire system.
- Designed for easy and secure fitment, minimizing installation challenges

EPDM 'O' Rings

- Specially designed EPDM (Ethylene Propylene Diene Monomer) rubber O-rings are installed on threads.
- They ensure watertight joints while absorbing vibrations from the pump, contributing to longevity and system stability.
- EPDM is the most suitable material for drinking water applications, maintaining safety standards.

Eco-Friendly & Safe Composition

- Gesco Bore-Wellcolumn pipes are made with lead-free, heavy-metal-free compounds, ensuring no contamination of groundwater.
- These eco-friendly materials eliminate the risk of leaching harmful substances like lead into water supplies, maintaining groundwater quality and public health.

Gesco Pipe offers innovative, durable, and environmentally responsible solutions for deep-well applications and other high-pressure water movement systems, combining advanced engineering with user safety and environmental care.


WHY UPVC FOR COLUMN PIPES?



GESCO Bore-Wellcolumn pipes are manufactured from “HEAVY METAL FREE” uPVC compound which especially developed by using “JAPANESE TECHNOLOGY” to sustain best column loads, pressure and also can withstand the high impacts during handling, storage and installation. Due to this special compound the TENSILE property of pipe increases which is being tested rigorously using modern testing equipment.

DOUBLE S.S STUD PIN LOCKING SYSTEM

GESCO column pipe was developed with double S.S stud pin locking system. Now on top of these locking, with our strong R & D and market feedback, we have added one Rubber Ring at the Coupler and Pipe Junction. This rubber ring is going to give double benefit to our column pipes. First and Major benefit is to provide 100% ensured locking of the coupler with pipe and another benefit is to absorb the jerk/ impact which is likely to occur to the pipe during transportation/ handling and In installed condition when initial starting / stopping of Pump/Motor. This improvement will help our customers to overcome some installation issues as well overcome some errors during lowering/lifting. Hence, this value engineering will keep the integrity of locking system very much intact.

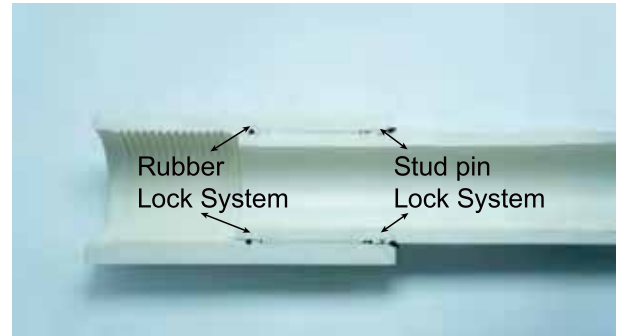

Accessories



Pump Guard



CI Top with Flange, Double Clamp




CI Top with Flange, Single Clamp



Lowering Jig (SIGRI)



Bottom adapter



CI Reducer Bottom



SS Bottom Adaptor



SS Top with Flange Double Clamp



S.S.KEY LOCK IN UPVC COLUMN PIPES

Application upto 1500*





GESCO GENERAL TRADING LLC

DUBAI, UNITED ARAB EMIRATES

CONTACT INFO

☎ +9714 236 5500

coordinator@gesco-me.com

gesscotrading@gmail.com