


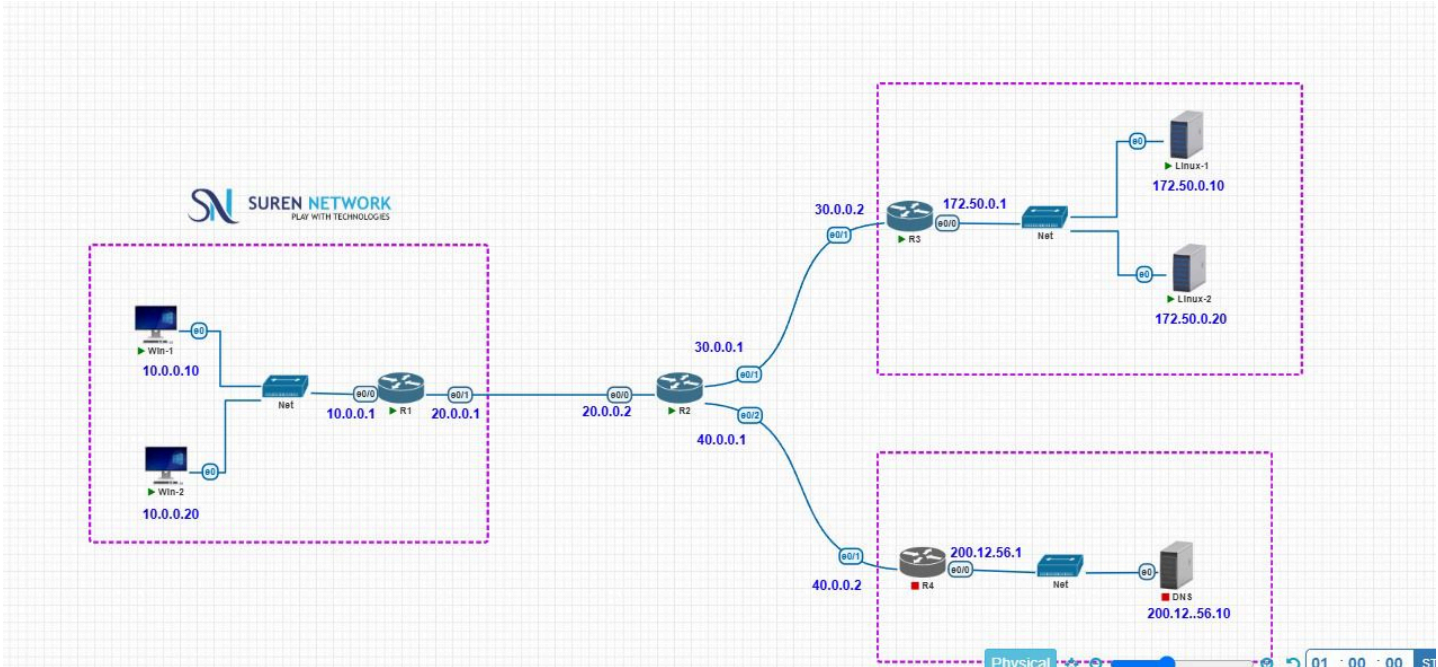

 R1

```
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R1(config)#access-list 2 deny 10.0.0.20 0.0.0.0
R1(config)#access-list 2 permit 10.0.0.0 0.255.255.255
R1(config)#int e0/0
R1(config-if)#ip access-group 2 in
R1(config-if)#
R1(config-if)#
R1(config-if)#
R1(config-if)#
R1(config-if)#ed
      ^
% Invalid input detected at '^' marker.

R1(config-if)#
R1(config-if)#
R1(config-if)#
R1(config-if)#
R1(config-if)#
R1(config-if)#
R1(config-if)#end
R1#
*Aug  5 11:13:54.278: %SYS-5-CONFIG_I: Configured from console by console
R1#
R1#
R1#
R1#
```

```
QEMU (Win-1)
C:\WINDOWS\system32\cmd.exe
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>ping 172.50.0.10

Pinging 172.50.0.10 with 32 bytes of data:

Reply from 172.50.0.10: bytes=32 time=4ms TTL=61
Reply from 172.50.0.10: bytes=32 time=2ms TTL=61
Reply from 172.50.0.10: bytes=32 time=2ms TTL=61
Reply from 172.50.0.10: bytes=32 time=1ms TTL=61

Ping statistics for 172.50.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 4ms, Average = 2ms


C:\Documents and Settings\user>ping 172.50.0.20

Pinging 172.50.0.20 with 32 bytes of data:

Reply from 172.50.0.20: bytes=32 time=3ms TTL=61
Reply from 172.50.0.20: bytes=32 time=1ms TTL=61
Reply from 172.50.0.20: bytes=32 time=2ms TTL=61
Reply from 172.50.0.20: bytes=32 time=2ms TTL=61


Ping statistics for 172.50.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
```

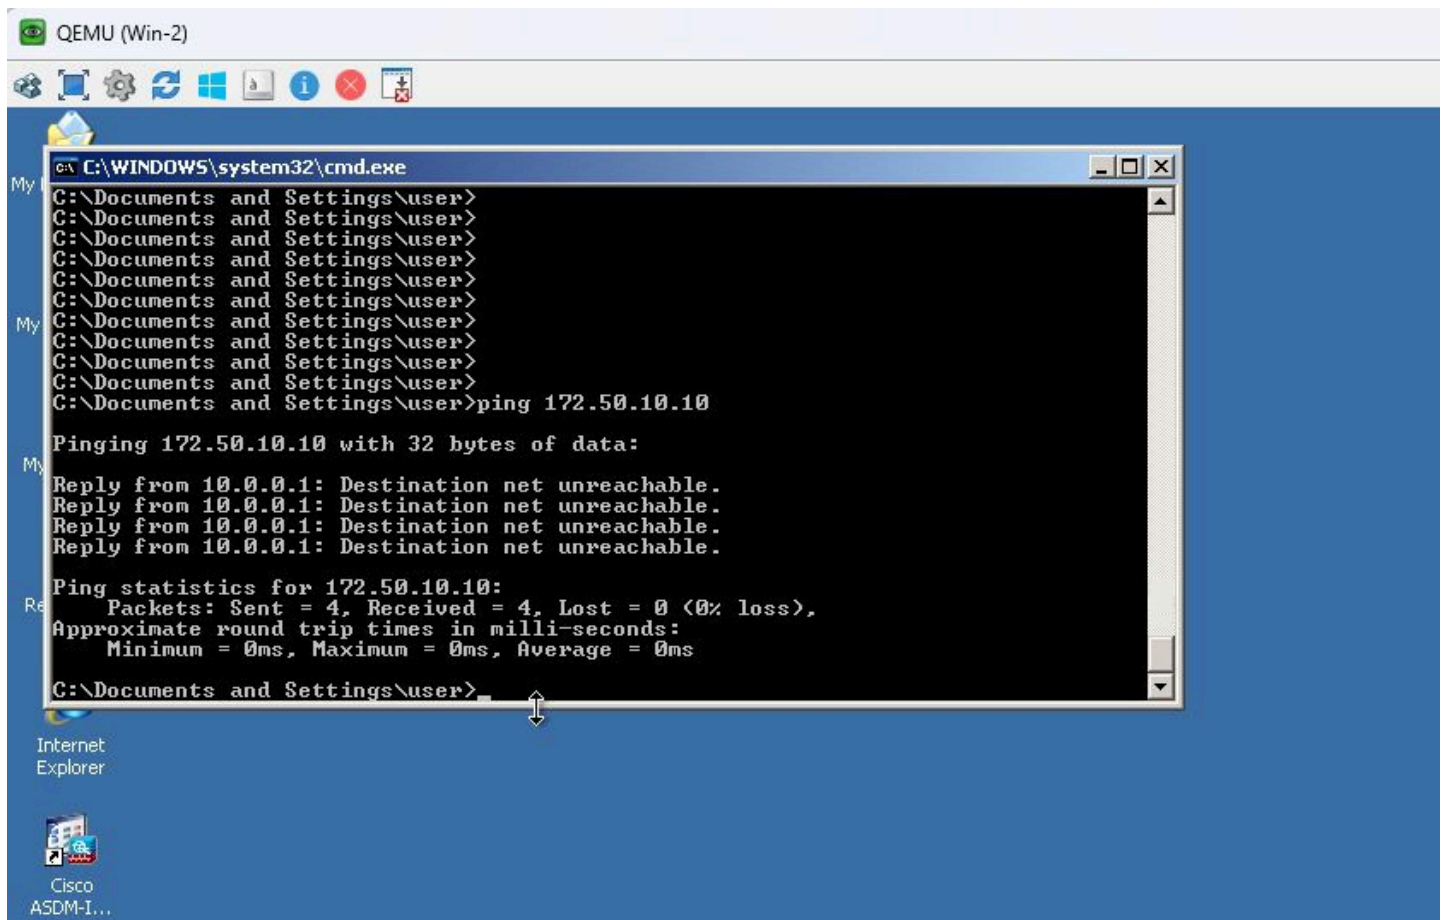



 R1

```
R1(config-if)#no ip access-group 2 in
R1(config-if)#end
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
*Aug  5 11:17:18.226: %SYS-5-CONFIG_I: Configured from console by console
R1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R1(config)#$ 121 permit tcp 10.0.0.10 0.0.0.0 172.50.0.10 0.0.0.0 eq 80
R1(config)#$ 121 permit tcp 10.0.0.20 0.0.0.0 172.50.0.20 0.0.0.0 eq 80
R1(config)#int e0/0
R1(config-if)#ip access-group 121 in
R1(config-if)#int e0/1
R1(config-if)#ip access-group 121 in
R1(config-if)#end
R1#
*Aug  5 11:20:17.536: %SYS-5-CONFIG_I: Configured from console by console
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
```

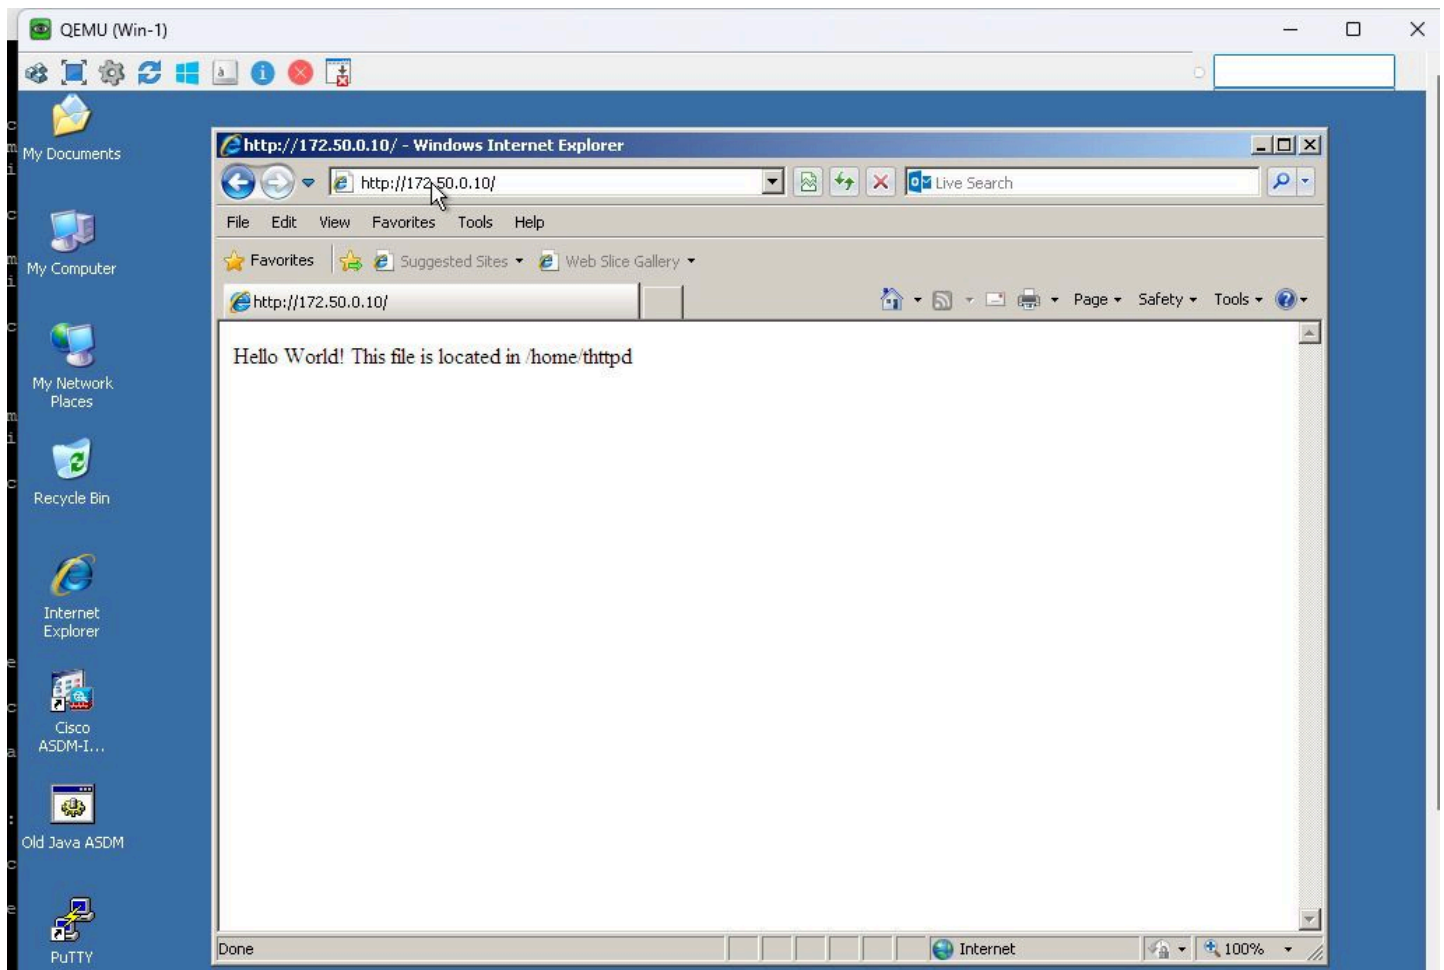



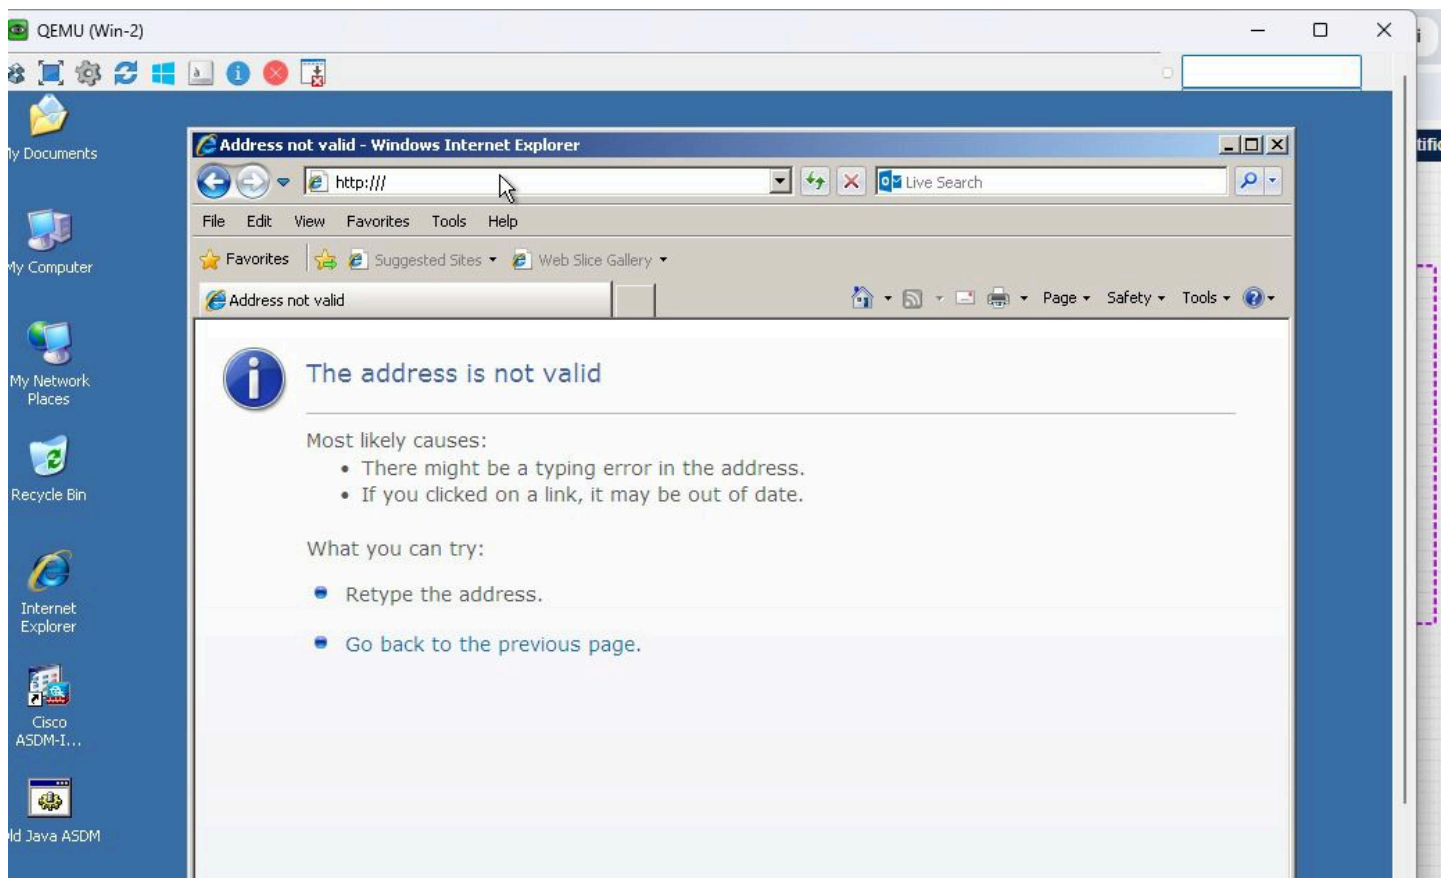

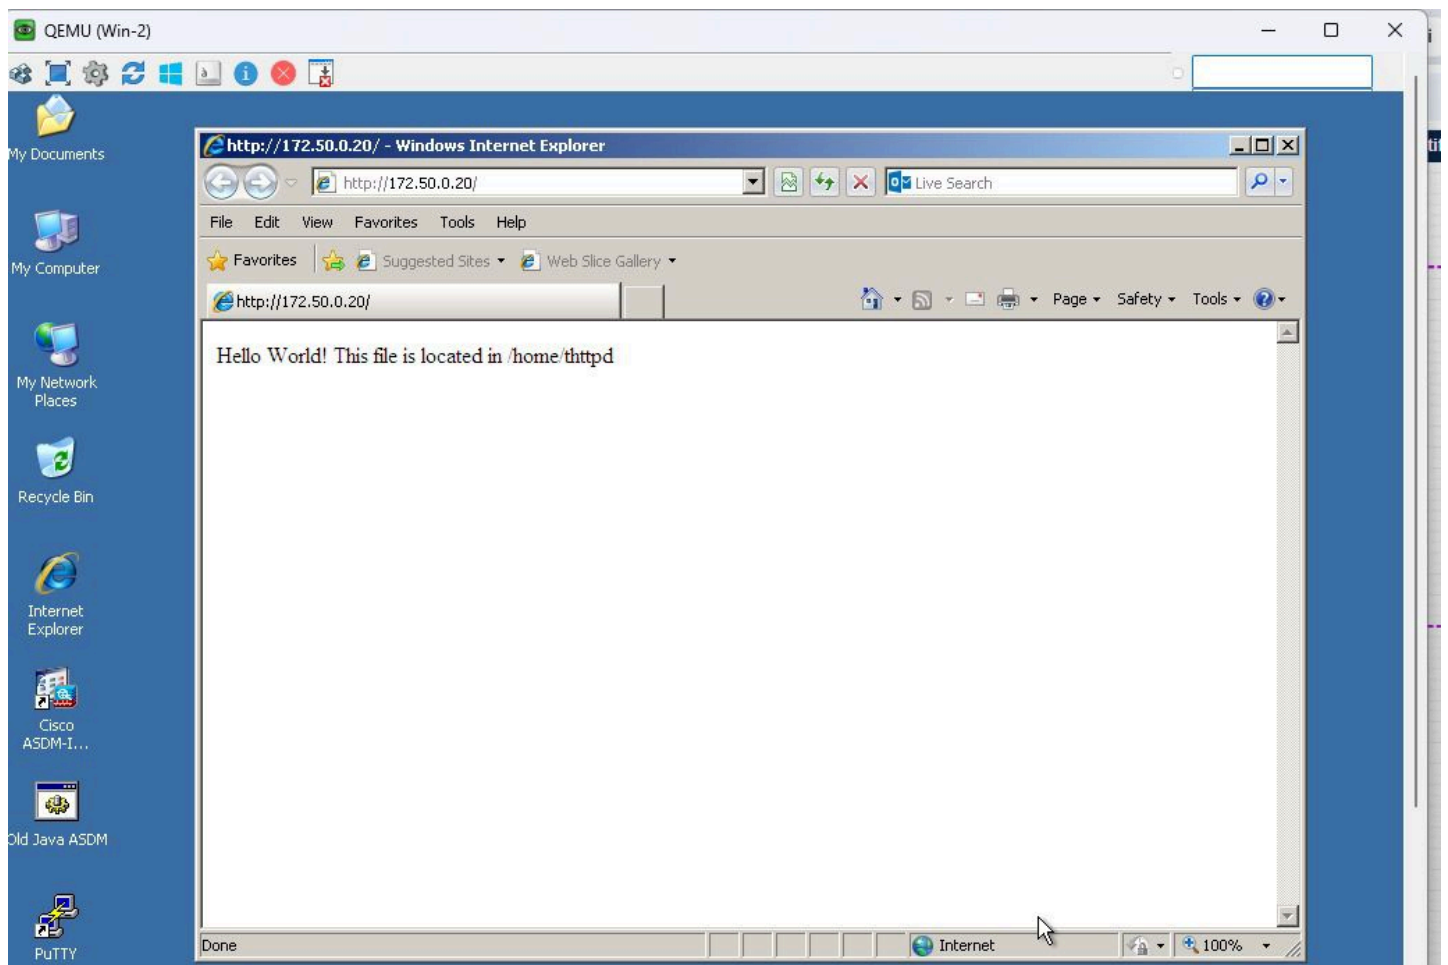

R1

```
R1#int e0/0
^
% Invalid input detected at '^' marker.

R1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R1(config)#int e0/0
R1(config-if)#ip access-group 121 in
R1(config-if)#end
R1#
*Aug  5 11:55:10.184: %SYS-5-CONFIG_I: Configured from console by console
R1#
*Aug  5 11:56:19.848: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R1(config)#int e0/1
R1(config-if)#ip access-group 121 in
R1(config-if)#end
R1#
*Aug  5 11:57:47.821: %SYS-5-CONFIG_I: Configured from console by console
R1#
R1#
R1#
R1#
R1#
R1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R1(config)# 121 permit icmp 10.0.0.10 0.0.0.0 172.50.0.10 0.0.0.0 echo
R1(config)# 121 permit icmp 172.50.0.10 0.0.0.0 10.0.0.10 0.0.0.0 echo-reply
R1(config)# 121 permit icmp 10.0.0.20 0.0.0.0 172.50.0.20 0.0.0.0 echo
R1(config)# 121 permit icmp 172.50.0.20 0.0.0.0 10.0.0.20 0.0.0.0 echo-reply
R1(config)#
R1(config)#
R1(config)#end
R1#
R1#
R1#
R1#
R1#
R1#
```

```
QEMU (Win-1)
C:\WINDOWS\system32\cmd.exe
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>ping 172.50.0.10

Pinging 172.50.0.10 with 32 bytes of data:

Reply from 172.50.0.10: bytes=32 time=3ms TTL=61
Reply from 172.50.0.10: bytes=32 time=2ms TTL=61
Reply from 172.50.0.10: bytes=32 time=2ms TTL=61
Reply from 172.50.0.10: bytes=32 time=1ms TTL=61

Ping statistics for 172.50.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 3ms, Average = 2ms


C:\Documents and Settings\user>ping 172.50.0.20

Pinging 172.50.0.20 with 32 bytes of data:

Reply from 10.0.0.1: Destination net unreachable.
Reply from 10.0.0.1: Destination net unreachable.
Reply from 10.0.0.1: Destination net unreachable.
Reply from 10.0.0.1: Destination net unreachable.

Ping statistics for 172.50.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Documents and Settings\user>_
```

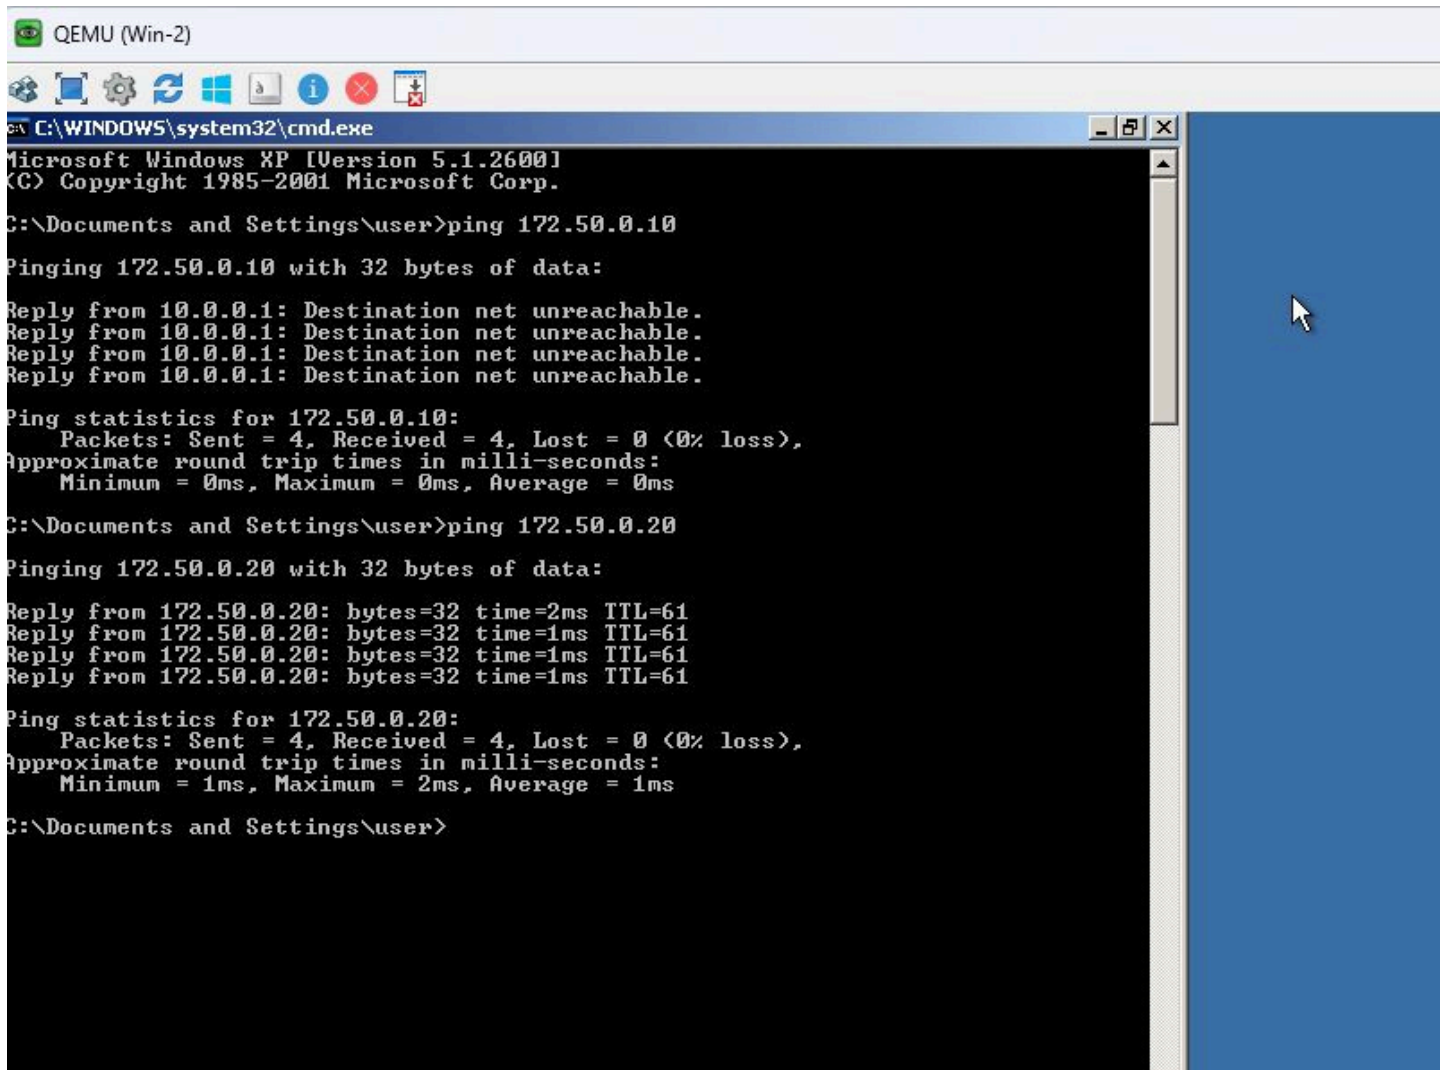

```
QEMU (Win-2)
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ping 172.50.0.10

Pinging 172.50.0.10 with 32 bytes of data:

Reply from 10.0.0.1: Destination net unreachable.
Reply from 10.0.0.1: Destination net unreachable.
Reply from 10.0.0.1: Destination net unreachable.
Reply from 10.0.0.1: Destination net unreachable.

Ping statistics for 172.50.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms


C:\Documents and Settings\user>ping 172.50.0.20

Pinging 172.50.0.20 with 32 bytes of data:

Reply from 172.50.0.20: bytes=32 time=2ms TTL=61
Reply from 172.50.0.20: bytes=32 time=1ms TTL=61
Reply from 172.50.0.20: bytes=32 time=1ms TTL=61
Reply from 172.50.0.20: bytes=32 time=1ms TTL=61

Ping statistics for 172.50.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>
```

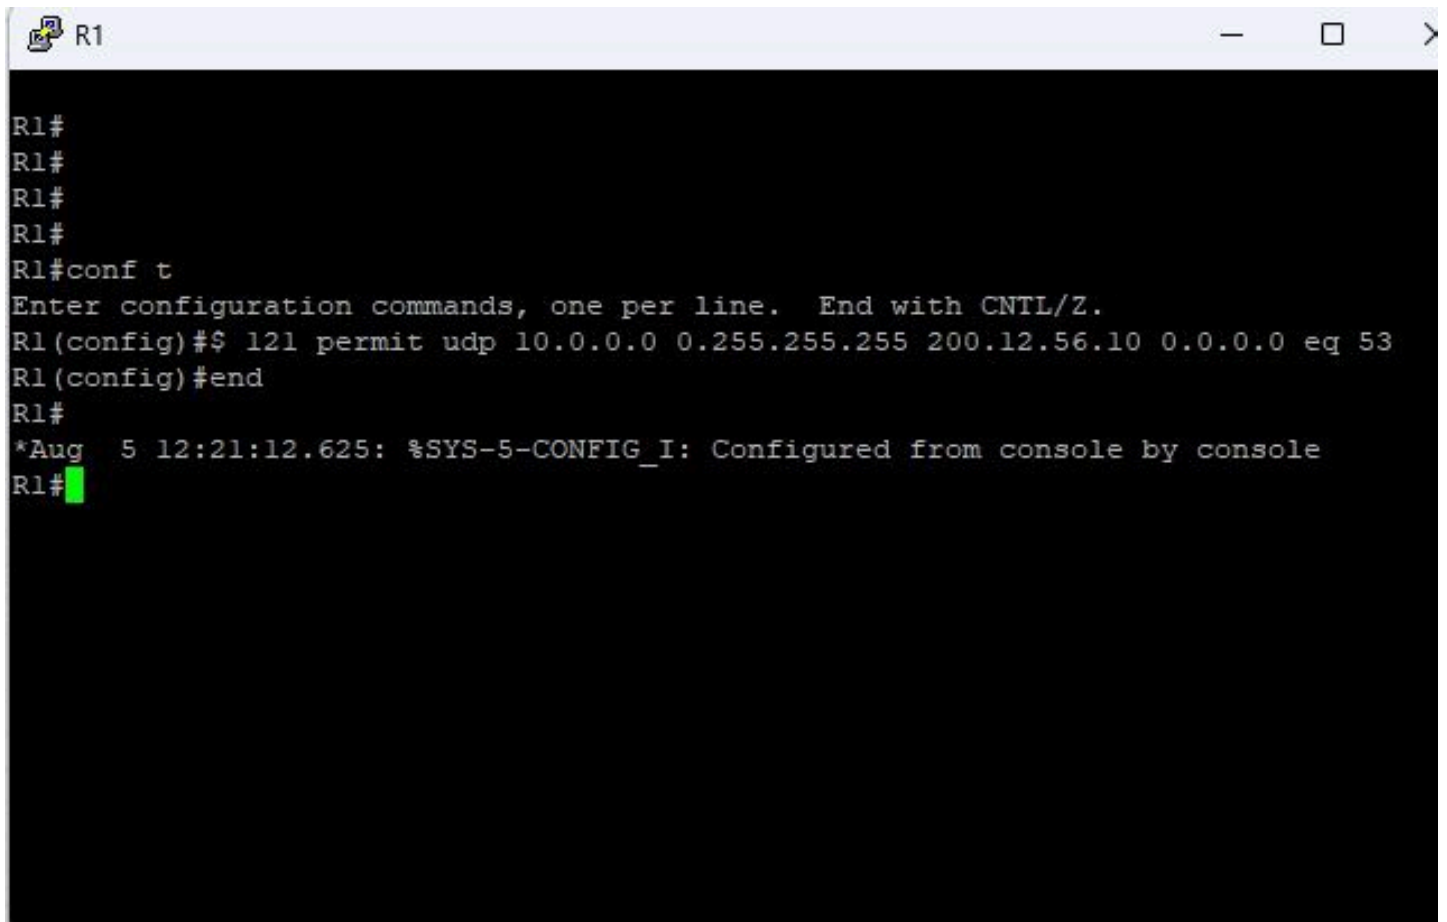

```
R1#
R1#
R1#
R1#
R1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R1(config)#$ 121 permit udp 10.0.0.0 0.255.255.255 200.12.56.10 0.0.0.0 eq 53
R1(config)#end
R1#
*Aug  5 12:21:12.625: %SYS-5-CONFIG_I: Configured from console by console
R1#
```

Server Manager

DNS Manager

File Action View Help

DNS

- SERVER2016
 - Forward Lookup Zones
 - com
 - linuxserver1
 - linuxserver2
 - Reverse Lookup Zones
 - Trust Points
 - Conditional Forwarders

Name	Type	Data	Timestamp
www	Host (A)	172.50.0.20	

Hide

Events

Services

Performance

BPA results

Events

Performance

BPA results

12:27 PM

