




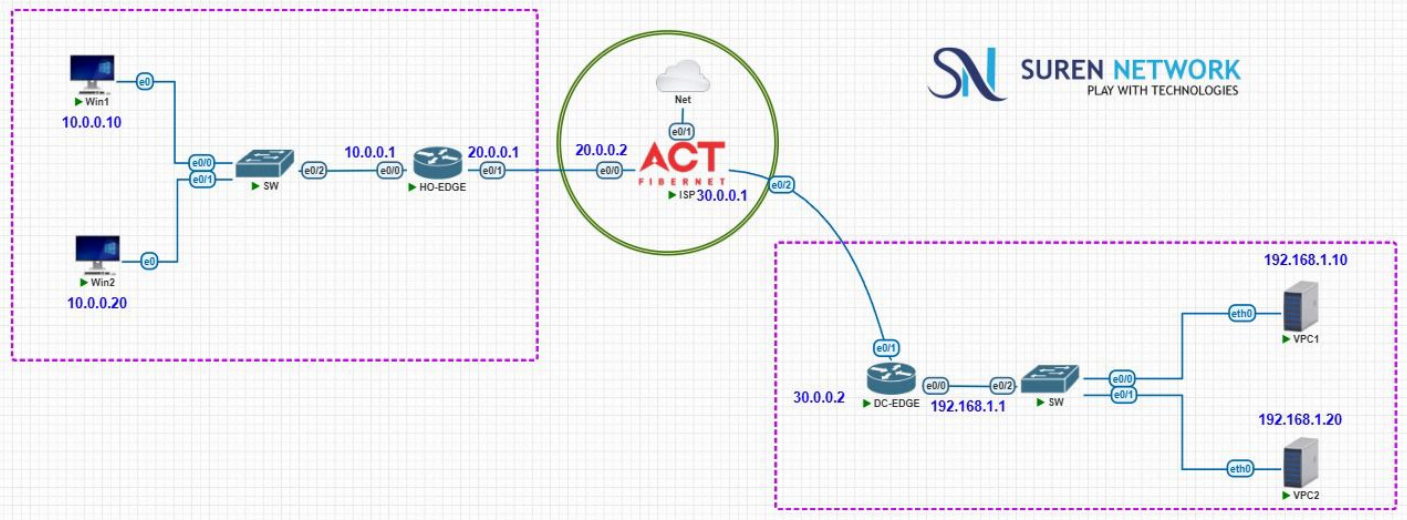



```
!  
!  
!  
interface Ethernet0/0  
  ip address 10.0.0.1 255.0.0.0  
  ip nat inside  
  ip virtual-reassembly in  
  duplex auto  
!  
interface Ethernet0/1  
  ip address 20.0.0.1 255.0.0.0  
  ip nat outside  
  ip virtual-reassembly in  
  duplex auto  
!  
interface Ethernet0/2  
  no ip address  
  shutdown  
  duplex auto  
!  
interface Ethernet0/3  
  no ip address  
  shutdown  
  duplex auto  
!  
ip forward-protocol nd  
!  
!  
no ip http server  
no ip http secure-server  
ip nat inside source list 10 interface Ethernet0/1 overload  
ip route 0.0.0.0 0.0.0.0 20.0.0.2  
!  
ipv6 ioam timestamp  
!  
!  
access-list 10 permit 10.0.0.0 0.255.255.255  
!  
control-plane  
!  
!  
!  
--More--
```

```
mm.      :  
no       :  
no       :  
mm.      :  
  
:        :  
:        :  
:        :  
:        :  
:        :  
:        :  
:        :  
:        :  
:  
ip       :  
:        :  
ip       ne  
         de  
         dr  
:  
:  
:  
ip       :  
no       :  
mul      :  
:  
:  
:  
:  
:  
:
```

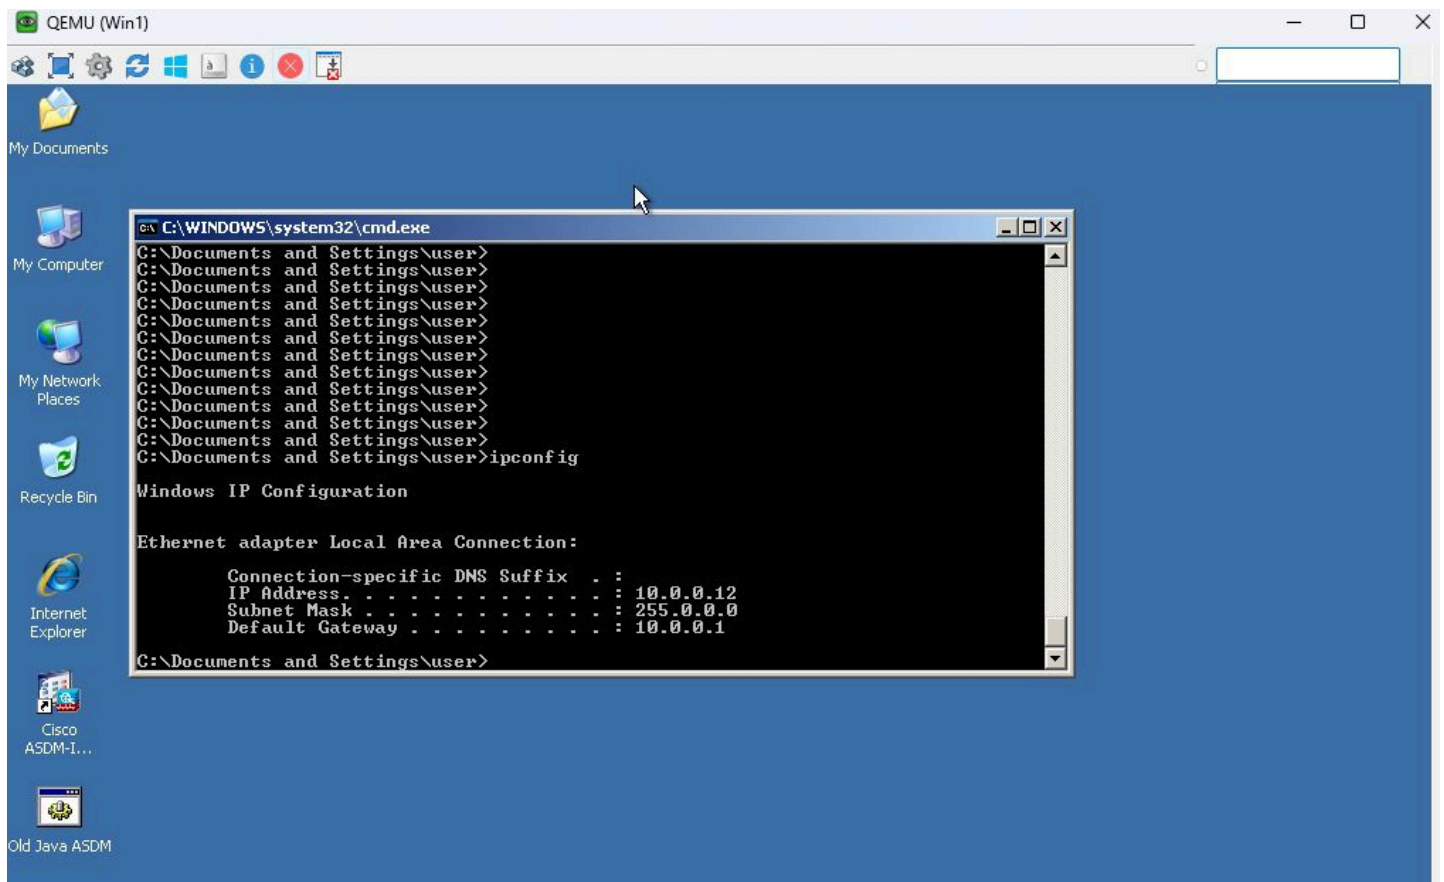

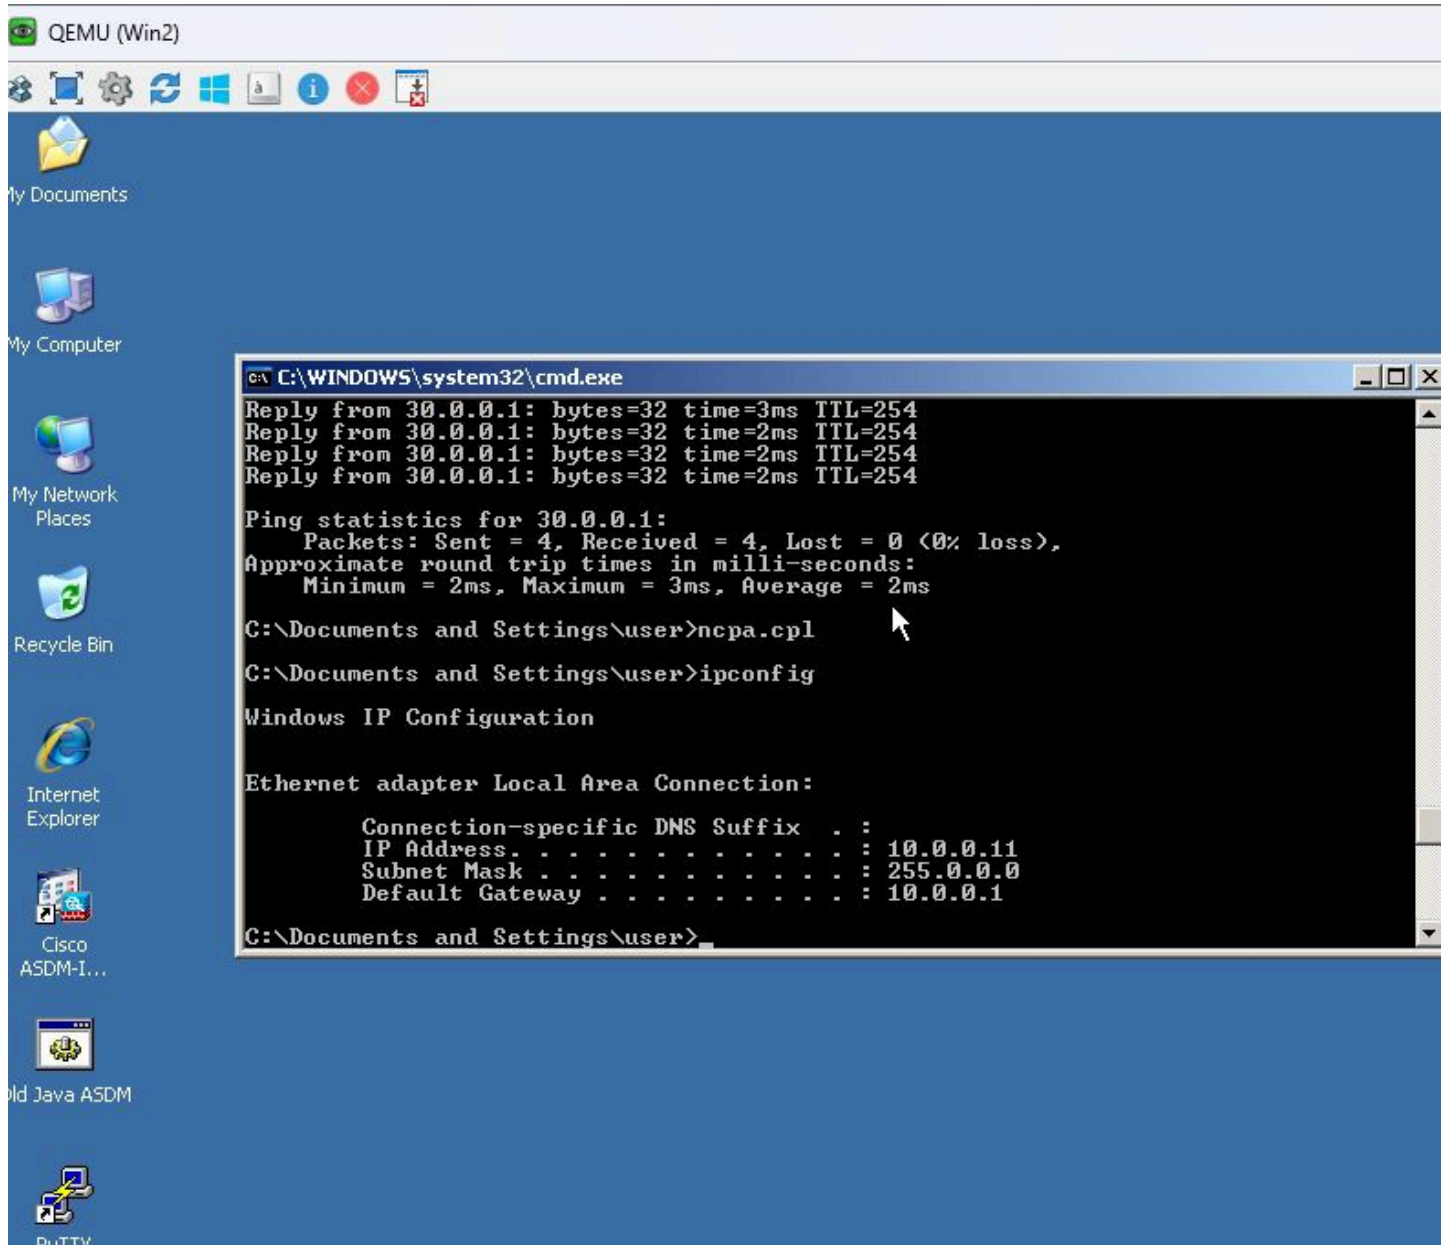

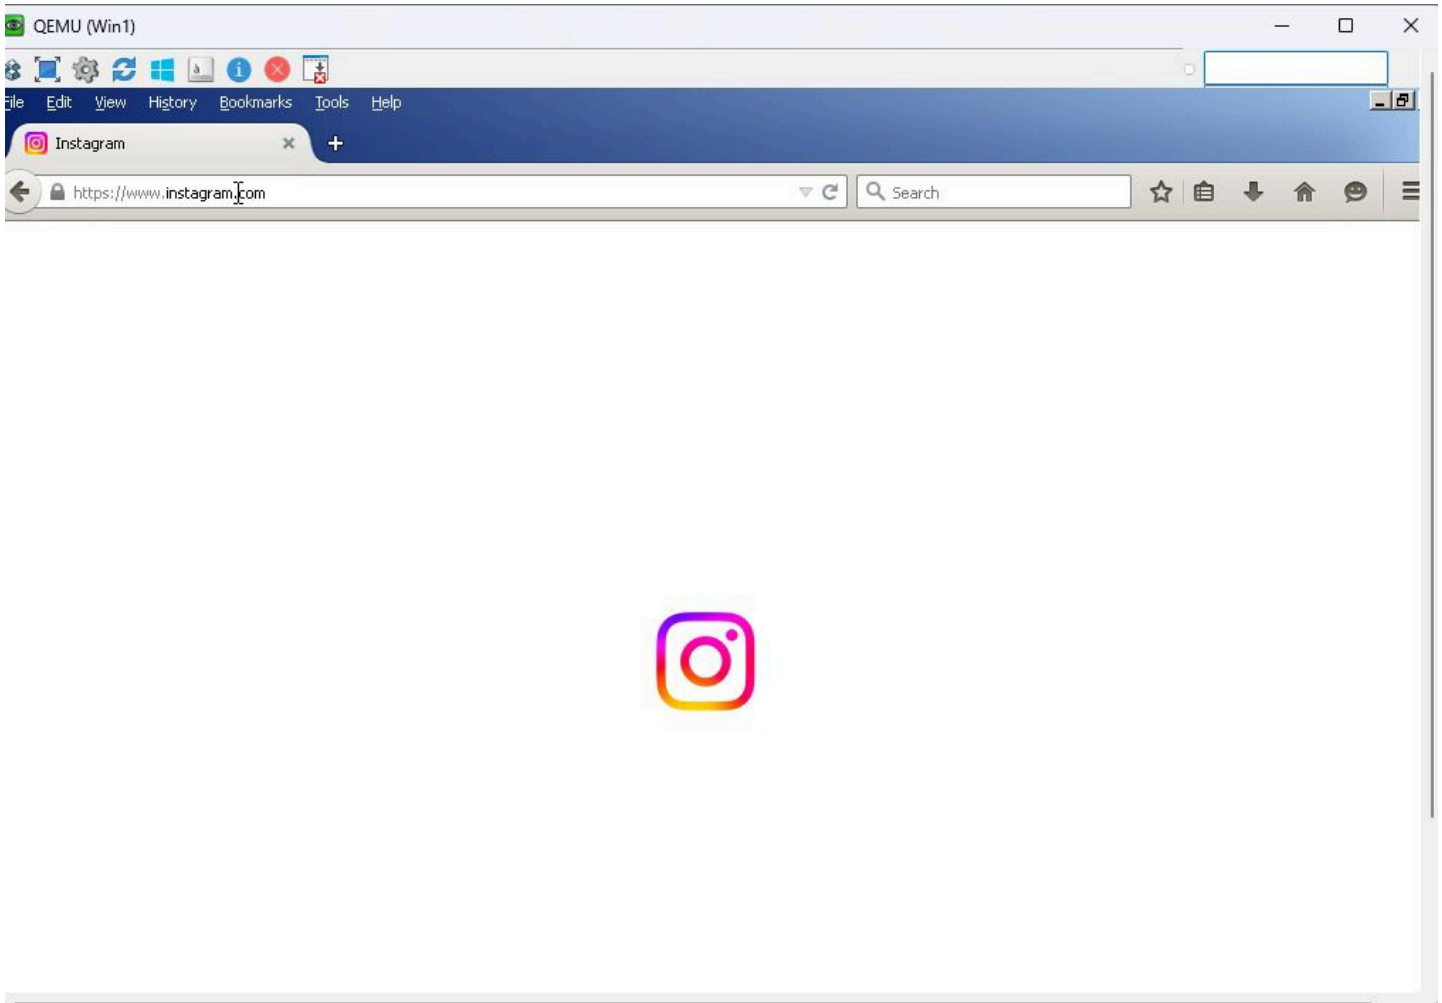

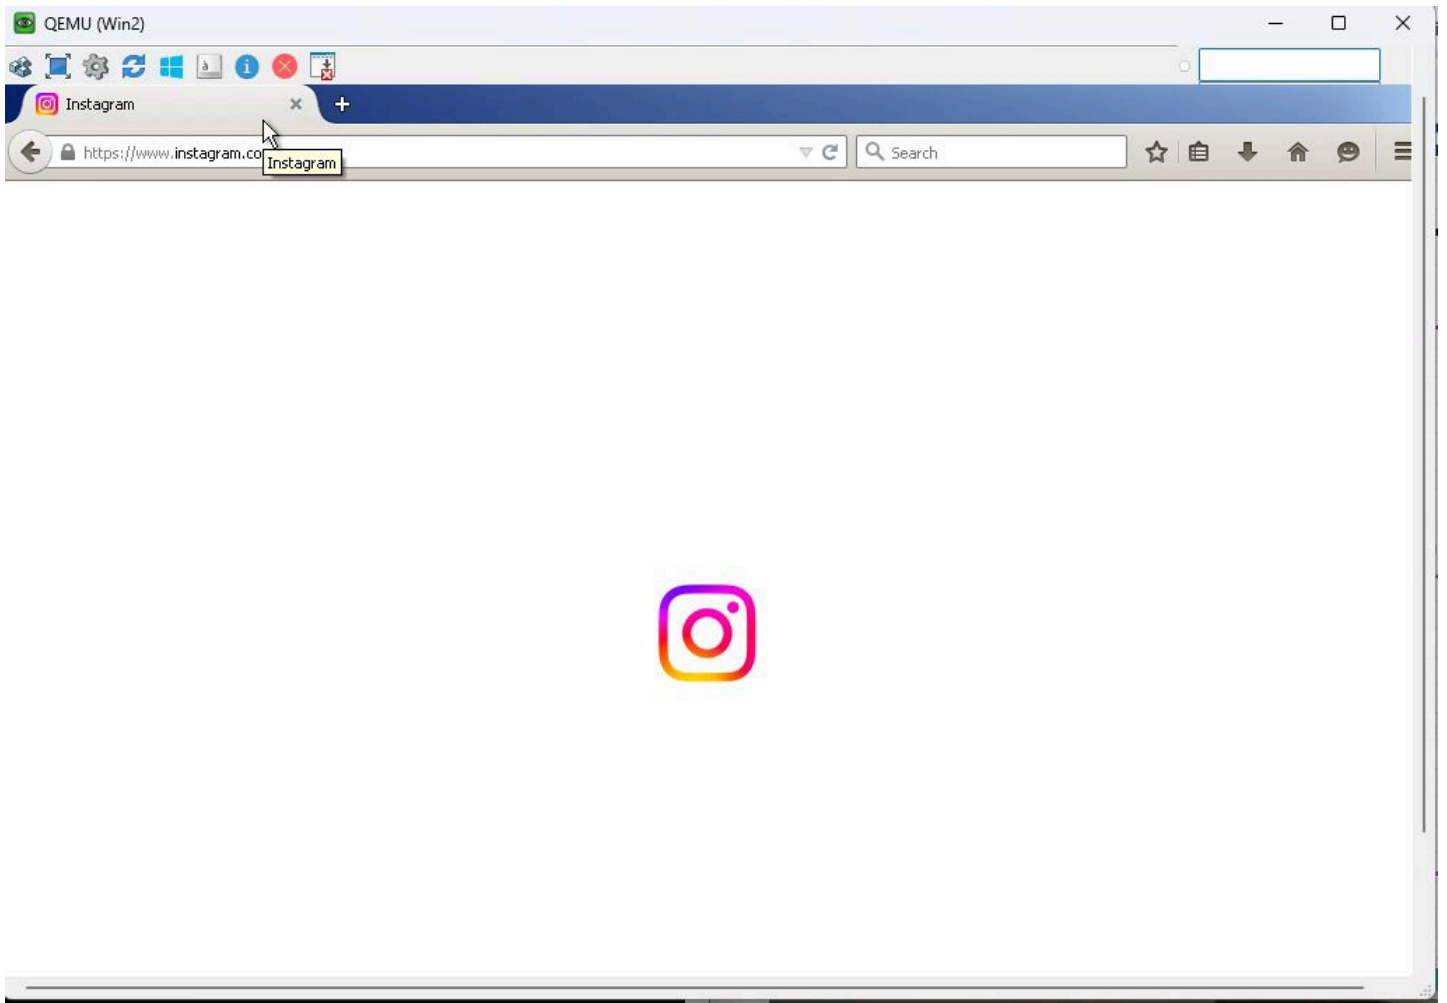

 VPC1

```
Welcome to Virtual PC Simulator, version 1.3 (0.8.1)
Dedicated to Daling.
Build time: May  7 2022 15:27:29
Copyright (c) 2007-2015, Paul Meng (mirnshi@gmail.com)
Copyright (c) 2021, Alain Degreffe (alain.degreffe@eve-ng.net)
All rights reserved.
```

```
VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.
Modified version for EVE-NG.
```

```
Press '?' to get help.
```

```
Executing the startup file
```

```
VPC1> ip 192.168.1.10/24 192.168.1.1
Checking for duplicate address...
sh ipVPC1 : 192.168.1.10 255.255.255.0 gateway 192.168.1.1
```

```
VPC1> sh ip
```

```
NAME       : VPC1[1]
IP/MASK     : 192.168.1.10/24
GATEWAY     : 192.168.1.1
DNS         :
MAC         : 00:50:79:66:68:00
LPORT      : 20000
RHOST:PORT  : 127.0.0.1:30000
MTU         : 1500
```

```
VPC1> 
```


 VPC2

```
Welcome to Virtual PC Simulator, version 1.3 (0.8.1)
Dedicated to Daling.
Build time: May  7 2022 15:27:29
Copyright (c) 2007-2015, Paul Meng (mirnshi@gmail.com)
Copyright (c) 2021, Alain Degreffe (alain.degreffe@eve-ng.net)
All rights reserved.
```

```
VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.
Modified version for EVE-NG.
```

```
Press '?' to get help.
```

```
Executing the startup file
```

```
VPC2> ip 192.168.1.20/24 192.168.1.1
Checking for duplicate address...
VPC2 : 192.168.1.20 255.255.255.0 gateway 192.168.1.1
```

```
VPC2> sh ip
```

```
NAME       : VPC2[1]
IP/MASK     : 192.168.1.20/24
GATEWAY     : 192.168.1.1
DNS         :
MAC         : 00:50:79:66:68:01
LPORT      : 20000
RHOST:PORT  : 127.0.0.1:30000
MTU        : 1500
```

```
VPC2> █
```

```
DC-EDGE
DC-EDGE (config) #
DC-EDGE (config) #end
DC-EDGE #
DC-EDGE #
DC-EDGE #
DC-EDGE #
*Aug  7 10:14:26.428: %SYS-5-CONFIG_I: Configured from console by console
DC-EDGE #
DC-EDGE #
DC-EDGE #
DC-EDGE #
DC-EDGE #
DC-EDGE #
DC-EDGE #
DC-EDGE #
DC-EDGE #
DC-EDGE #conf t
Enter configuration commands, one per line.  End with CNTL/Z.
DC-EDGE (config) #int e0/0
DC-EDGE (config-if) #ip nat inside
DC-EDGE (config-if) #end
DC-EDGE #
*Aug  7 10:19:25.430: %SYS-5-CONFIG_I: Configured from console by console
*Aug  7 10:19:25.484: %LINEPROTO-5-UPDOWN: Line protocol on Interface NVI0, change
d state to up
DC-EDGE #conf t
Enter configuration commands, one per line.  End with CNTL/Z.
DC-EDGE (config) #int e0/1
DC-EDGE (config-if) #ip nat outside
DC-EDGE (config-if) #ex
DC-EDGE (config) #ip nat inside source 192.168.1.10 30.0.0.10
                                     ^
% Invalid input detected at '^' marker.

DC-EDGE (config) #ip nat inside source static 192.168.1.10 30.0.0.10
DC-EDGE (config) #ip nat inside source static 192.168.1.20 30.0.0.20
DC-EDGE (config) #
DC-EDGE (config) #
DC-EDGE (config) #
DC-EDGE (config) #
DC-EDGE (config) #ex
% Ambiguous command:  "ex"
```



```
QEMU (Win2)
C:\WINDOWS\system32\cmd.exe
Minimum = 3ms, Maximum = 4ms, Average = 3ms
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>ping 30.0.0.10
Pinging 30.0.0.10 with 32 bytes of data:
Reply from 30.0.0.10: bytes=32 time=4ms TTL=61
Reply from 30.0.0.10: bytes=32 time=3ms TTL=61
Reply from 30.0.0.10: bytes=32 time=3ms TTL=61
Reply from 30.0.0.10: bytes=32 time=2ms TTL=61
Ping statistics for 30.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 4ms, Average = 3ms
C:\Documents and Settings\user>ping 30.0.0.20
Pinging 30.0.0.20 with 32 bytes of data:
Reply from 30.0.0.20: bytes=32 time=6ms TTL=61
Reply from 30.0.0.20: bytes=32 time=4ms TTL=61
Reply from 30.0.0.20: bytes=32 time=4ms TTL=61
Reply from 30.0.0.20: bytes=32 time=3ms TTL=61
Ping statistics for 30.0.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 3ms, Maximum = 6ms, Average = 4ms
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
```