


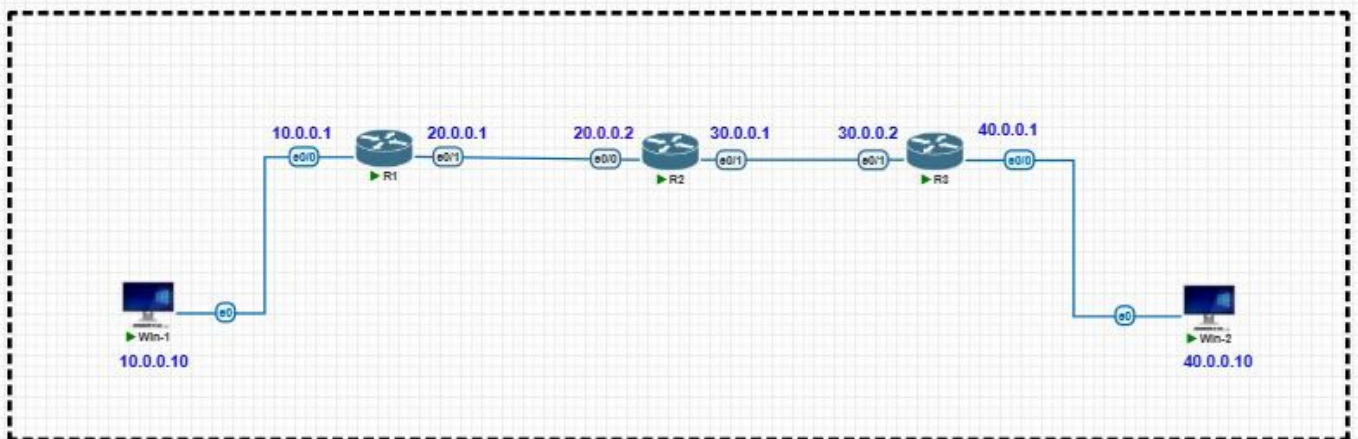

```
R1
Num                               (sec)          (ms)          Cnt
0  20.0.0.2                       Et0/1          13 00:00:18 1597  5000  0
6
R1(config)#do sh ip eigrp topology
EIGRP-IPv4 Topology Table for AS(7)/ID(20.0.0.1)
Codes: P - Passive, A - Active, U - Update, Q - Query, R - Reply,
       r - reply Status, s - sia Status

P 10.0.0.0/8, 1 successors, FD is 281600
    via Connected, Ethernet0/0
P 30.0.0.0/8, 1 successors, FD is 307200
    via 20.0.0.2 (307200/281600), Ethernet0/1
P 40.0.0.0/8, 1 successors, FD is 332800
    via 20.0.0.2 (332800/307200), Ethernet0/1
P 20.0.0.0/8, 1 successors, FD is 281600
    via Connected, Ethernet0/1

R1(config)#
R1(config)#
R1(config)#do sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

    10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/8 is directly connected, Ethernet0/0
L       10.0.0.1/32 is directly connected, Ethernet0/0
    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       20.0.0.0/8 is directly connected, Ethernet0/1
L       20.0.0.1/32 is directly connected, Ethernet0/1
D       30.0.0.0/8 [90/307200] via 20.0.0.2, 00:01:35, Ethernet0/1
D       40.0.0.0/8 [90/332800] via 20.0.0.2, 00:01:35, Ethernet0/1
R1(config)#
```

```

R2
et0/0) is up: new adjacency
R2(config)#
*Aug 19 14:57:47.855: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R2(config)#
R2(config)#
R2(config)#
R2(config)#
R2(config)#do sh ip eigrh neighbors
^
% Invalid input detected at '^' marker.

R2(config)#do sh ip eigrp neighbors
EIGRP-IPv4 Neighbors for AS(7)
H   Address                Interface                Hold Uptime    SRTT    RTO   Q   Seq
                               (sec)              (ms)          Cnt  Num
m
1   20.0.0.1                Et0/0                  12 00:04:56     3    100   0    3
0   30.0.0.2                Et0/1                  13 00:05:37     4    100   0    5

R2(config)#do sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

D    10.0.0.0/8 [90/307200] via 20.0.0.1, 00:04:53, Ethernet0/0
    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Ethernet0/0
L    20.0.0.2/32 is directly connected, Ethernet0/0
    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    30.0.0.0/8 is directly connected, Ethernet0/1
L    30.0.0.1/32 is directly connected, Ethernet0/1
D    40.0.0.0/8 [90/307200] via 30.0.0.2, 00:05:34, Ethernet0/1
R2(config)#

```



```
R3
R3(config)#
R3(config)#
R3(config)#
R3(config)#
R3(config)#do sh ip eigrp neighbors
EIGRP-IPv4 Neighbors for AS(7)
H   Address                Interface                Hold Uptime    SRTT    RTO  Q  Se
q                                     (sec)         (ms)          Cnt Nu
m
0   30.0.0.1                Et0/1                  14 00:06:23    5    100  0  7
R3(config)#do sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

D    10.0.0.0/8 [90/332800] via 30.0.0.1, 00:05:48, Ethernet0/1
D    20.0.0.0/8 [90/307200] via 30.0.0.1, 00:06:36, Ethernet0/1
    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    30.0.0.0/8 is directly connected, Ethernet0/1
L    30.0.0.2/32 is directly connected, Ethernet0/1
    40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    40.0.0.0/8 is directly connected, Ethernet0/0
L    40.0.0.1/32 is directly connected, Ethernet0/0
R3(config)#
```

