


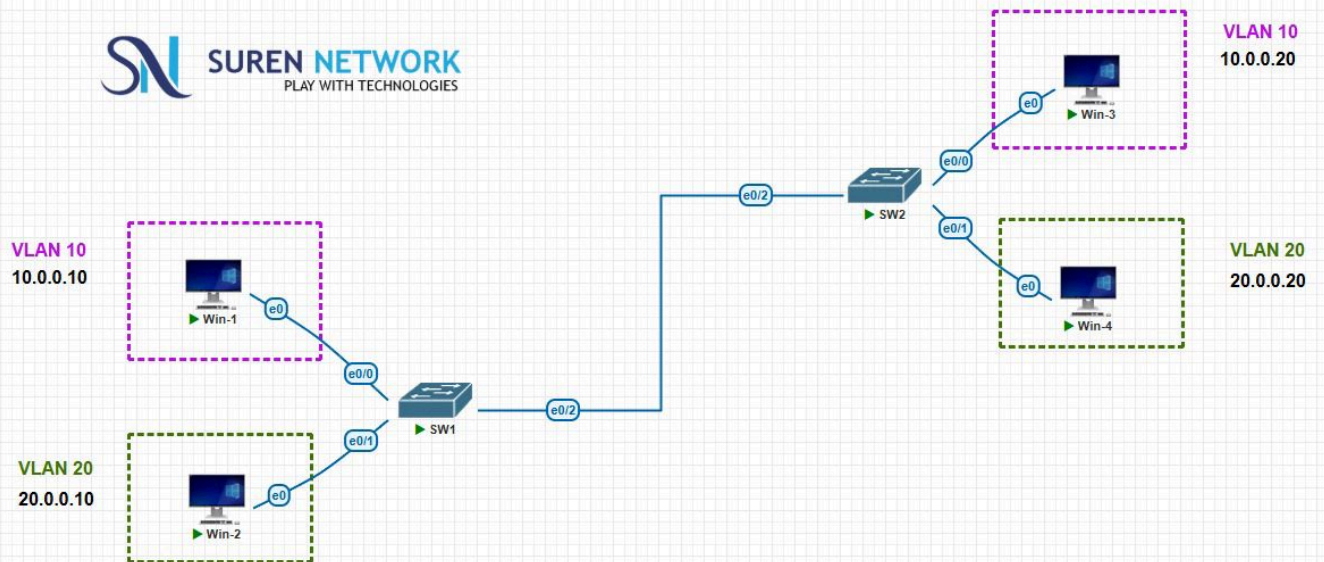

```
SW1#
SW1#
SW1#
SW1#sh mac address-tab;e
      Mac Address Table
-----
Vlan    Mac Address      Type        Ports
----    -
1       5033.b407.8800    DYNAMIC     Et0/2
1       5050.2407.8500    DYNAMIC     Et0/0
1       50df.d307.8600    DYNAMIC     Et0/1
1       aabb.cc00.0220    DYNAMIC     Et0/2
Total Mac Addresses for this criterion: 4
SW1#sh vlan brief


VLAN Name                Status      Ports
----
1      default                active      Et0/0, Et0/1, Et0/2, Et0/3
1002   fddi-default            act/unsup
1003   token-ring-default      act/unsup
1004   fddinet-default         act/unsup
1005   trnet-default           act/unsup
SW1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
SW1(config)#vlan 10
SW1(config-vlan)#name hr
SW1(config-vlan)#ex
SW1(config)#vlan 20
SW1(config-vlan)#name sales
SW1(config-vlan)#ex
SW1(config)#int e0/0
SW1(config-if)#switchport access vlan 10
SW1(config-if)#ex
SW1(config)#int e0/1
SW1(config-if)#switchport access vlan 20
SW1(config-if)#ex
SW1(config)#sh vlan brief
^
```

```
SW2
-----
1      aabb.cc00.0120      DYNAMIC      Et0/2
Total Mac Addresses for this criterion: 1
SW2#sh vlan bref
      ^
% Invalid input detected at '^' marker.

SW2#sh vlan brief

VLAN Name                Status      Ports
-----
1      default            active      Et0/0, Et0/1, Et0/2, Et0/3
1002   fddi-default        act/unsup
1003   token-ring-default  act/unsup
1004   fddinet-default     act/unsup
1005   trnet-default        act/unsup
SW2#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
SW2(config)#vlan 10
SW2(config-vlan)#name hr
SW2(config-vlan)#ex
SW2(config)#vlan 20
SW2(config-vlan)#name sales
SW2(config-vlan)#ex
SW2(config)#int e0/0
SW2(config-if)#switchport access vlan 10
SW2(config-if)#ex
SW2(config)#int e0/1
SW2(config-if)#switchport access vlan 20
SW2(config-if)#ex
SW2(config)#do sh vlan brief

VLAN Name                Status      Ports
-----
1      default            active      Et0/2, Et0/3
10     hr                  active      Et0/0
20     sales               active      Et0/1
1002   fddi-default        act/unsup
1003   token-ring-default  act/unsup
1004   fddinet-default     act/unsup
1005   trnet-default        act/unsup
SW2(config)#
```

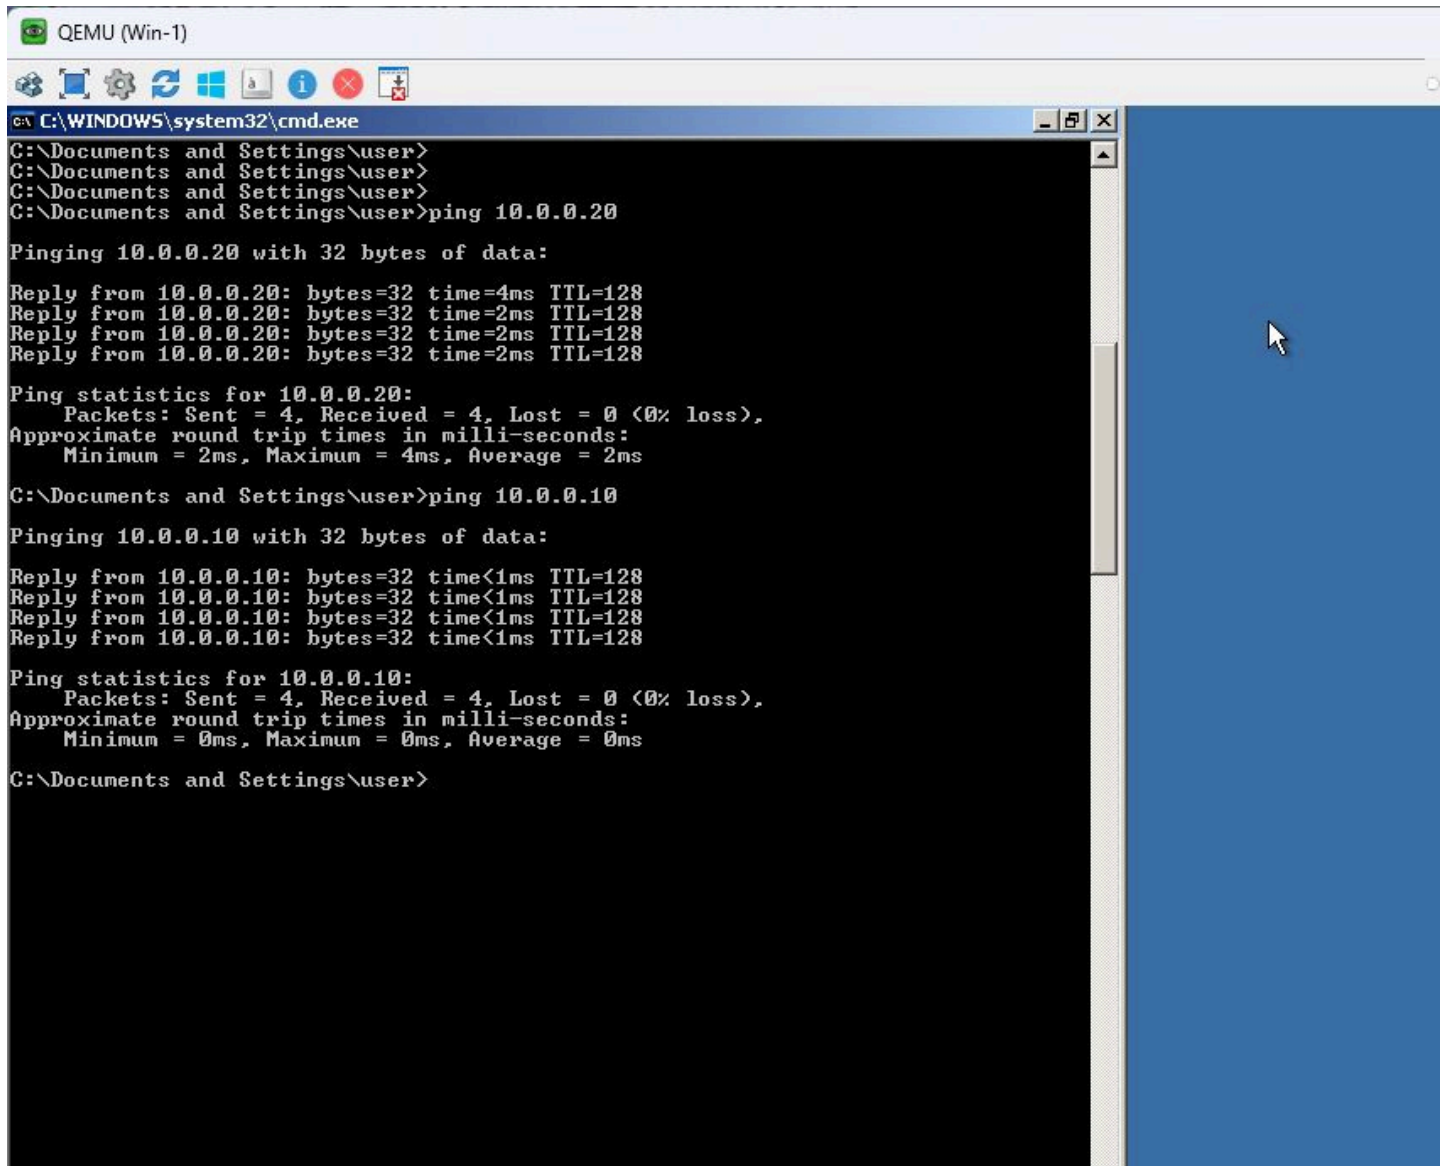

```
QEMU (Win-1)
C:\WINDOWS\system32\cmd.exe
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>ping 10.0.0.20

Pinging 10.0.0.20 with 32 bytes of data:

Reply from 10.0.0.20: bytes=32 time=4ms TTL=128
Reply from 10.0.0.20: bytes=32 time=2ms TTL=128
Reply from 10.0.0.20: bytes=32 time=2ms TTL=128
Reply from 10.0.0.20: bytes=32 time=2ms TTL=128

Ping statistics for 10.0.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 4ms, Average = 2ms


C:\Documents and Settings\user>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time<1ms TTL=128
Reply from 10.0.0.10: bytes=32 time<1ms TTL=128
Reply from 10.0.0.10: bytes=32 time<1ms TTL=128
Reply from 10.0.0.10: bytes=32 time<1ms TTL=128

Ping statistics for 10.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Documents and Settings\user>
```

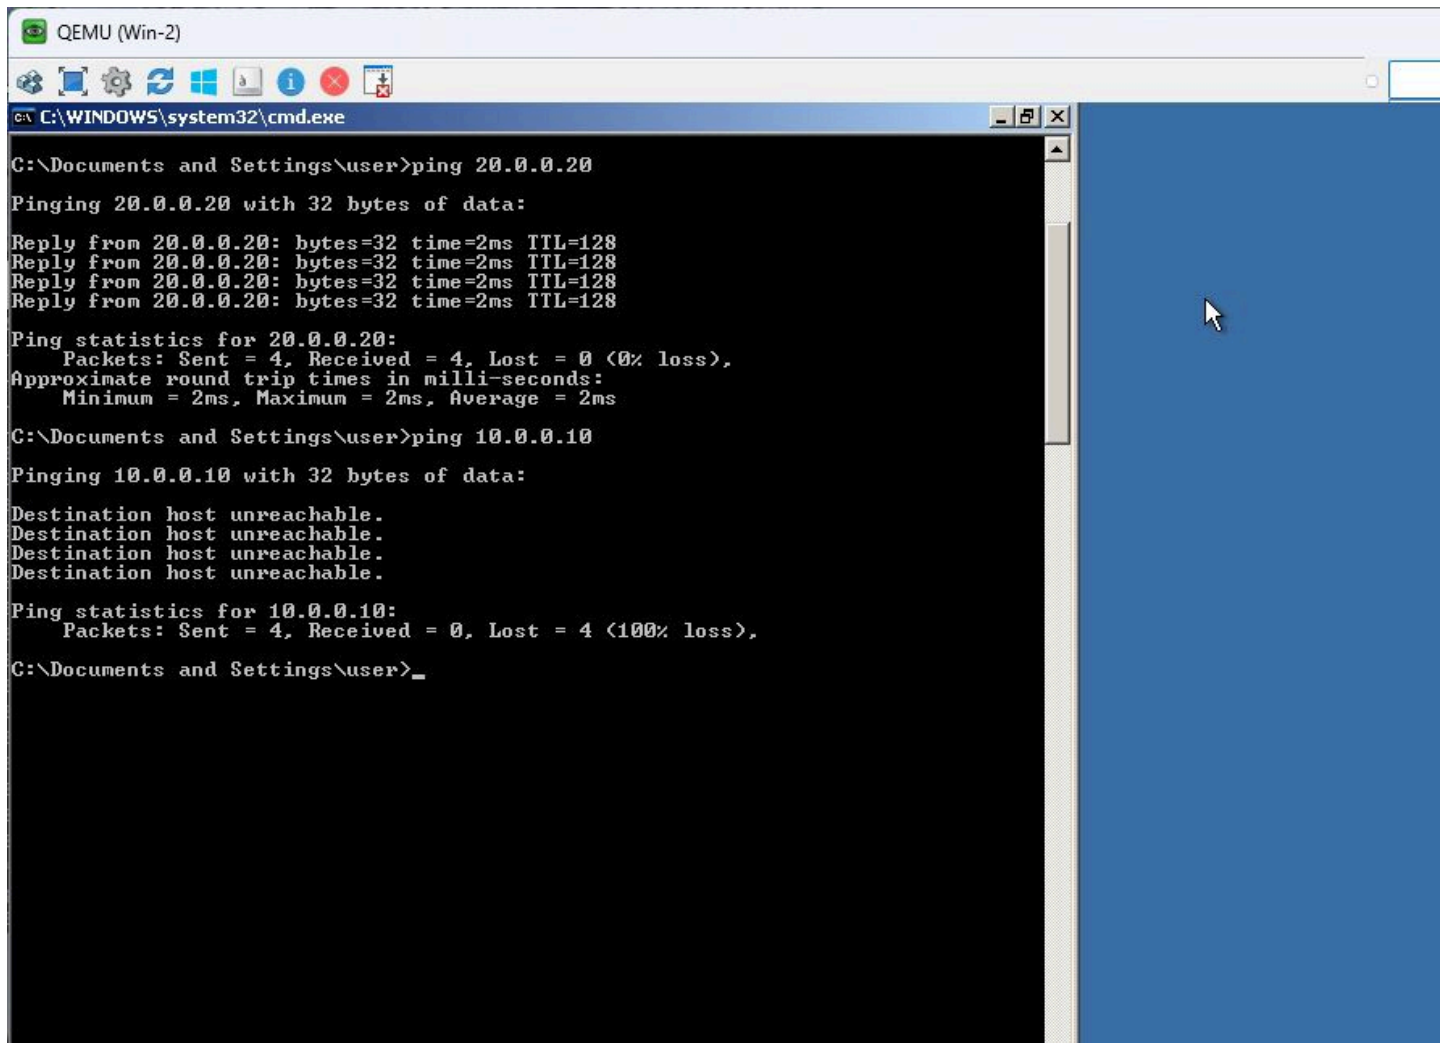

```
QEMU (Win-2)
C:\WINDOWS\system32\cmd.exe

C:\Documents and Settings\user>ping 20.0.0.20
Pinging 20.0.0.20 with 32 bytes of data:
Reply from 20.0.0.20: bytes=32 time=2ms TTL=128
Reply from 20.0.0.20: bytes=32 time=2ms TTL=128
Reply from 20.0.0.20: bytes=32 time=2ms TTL=128
Reply from 20.0.0.20: bytes=32 time=2ms TTL=128
Ping statistics for 20.0.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 2ms, Average = 2ms

C:\Documents and Settings\user>ping 10.0.0.10
Pinging 10.0.0.10 with 32 bytes of data:
Destination host unreachable.
Destination host unreachable.
Destination host unreachable.
Destination host unreachable.
Ping statistics for 10.0.0.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Documents and Settings\user>_
```

