
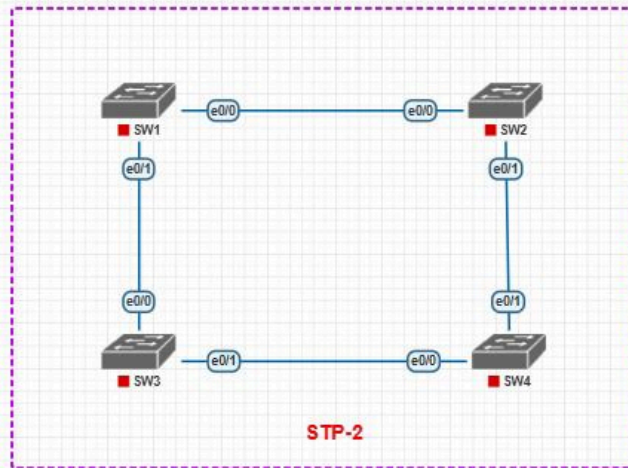


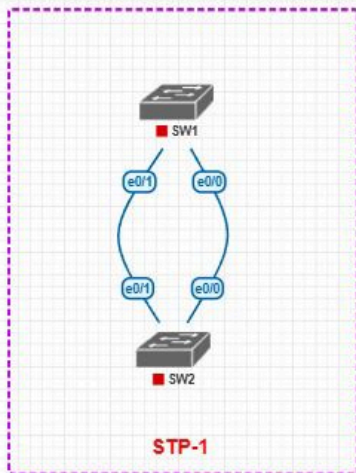

Switch# Show spanning-tree

```
SW1
*Aug 13 15:03:41.881: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/1,
changed state to up
*Aug 13 15:03:41.881: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/2,
changed state to up
*Aug 13 15:03:41.881: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/3,
changed state to up
*Aug 13 15:03:44.797: %PLATFORM-5-SIGNATURE_VERIFIED: Image '/i86bi_linux_12-adver
terprisek9-ms.SSA.high_iron_20180510.bin' passed code signing verification
SW1#
SW1#
SW1#
SW1#
SW1#
SW1#
SW1#sh span
*Aug 13 15:03:51.740: %LINK-3-UPDOWN: Interface Ethernet0/2, changed state to down
*Aug 13 15:03:51.741: %LINK-3-UPDOWN: Interface Ethernet0/3, changed state to down
*Aug 13 15:03:52.740: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/2,
changed state to down
*Aug 13 15:03:52.741: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/3,
changed state to down
SW1#sh spanning-tree
VLAN0001
  Spanning tree enabled protocol ieee
  Root ID    Priority    32769
             Address     aabb.cc00.0100
             This bridge is the root
             Hello Time  2 sec  Max Age 20 sec  Forward Delay 15 sec

  Bridge ID  Priority    32769  (priority 32768 sys-id-ext 1)
             Address     aabb.cc00.0100
             Hello Time  2 sec  Max Age 20 sec  Forward Delay 15 sec
             Aging Time  300 sec

Interface                Role Sts Cost          Prio.Nbr Type
-----
Et0/0                    Desg LRN 100          128.1    P2p
Et0/1                    Desg LRN 100          128.2    P2p

SW1#
```

```
SW2#sh spanning-tree
```

```
VLAN0001
```

```
Spanning tree enabled protocol ieee
```

```
Root ID      Priority      32769
             Address      aabb.cc00.0100
             Cost         100
             Port         1 (Ethernet0/0)
             Hello Time    2 sec  Max Age 20 sec  Forward Delay 15 sec
```

```
Bridge ID    Priority      32769 (priority 32768 sys-id-ext 1)
             Address      aabb.cc00.0200
             Hello Time    2 sec  Max Age 20 sec  Forward Delay 15 sec
             Aging Time    300 sec
```

Interface	Role	Sts	Cost	Prio.Nbr	Type
Et0/0	Root	FWD	100	128.1	P2p
Et0/1	Altn	BLK	100	128.2	P2p

```
SW2#
```

SW1

```
SW1#
SW1#
SW1#
SW1#
SW1#sh spaning-tree
      ^
% Invalid input detected at '^' marker.

SW1#sh spanning-tree

VLAN0001
  Spanning tree enabled protocol ieee
  Root ID    Priority    32769
            Address     aabb.cc00.0300
            This bridge is the root
            Hello Time  2 sec  Max Age 20 sec  Forward Delay 15 sec

  Bridge ID  Priority    32769  (priority 32768 sys-id-ext 1)
            Address     aabb.cc00.0300
            Hello Time  2 sec  Max Age 20 sec  Forward Delay 15 sec
            Aging Time  15 sec

Interface                Role Sts Cost      Prio.Nbr Type
-----
Et0/0                    Desg FWD 100      128.1    P2p
Et0/1                    Desg FWD 100      128.2    P2p

SW1#
```

```
SW2
SW2#
SW2#sh spanning-tree

VLAN0001
  Spanning tree enabled protocol ieee
  Root ID    Priority    32769
             Address    aabb.cc00.0300
             Cost        100
             Port        1 (Ethernet0/0)
             Hello Time   2 sec   Max Age 20 sec   Forward Delay 15 sec

  Bridge ID   Priority    32769   (priority 32768 sys-id-ext 1)
             Address    aabb.cc00.0500
             Hello Time   2 sec   Max Age 20 sec   Forward Delay 15 sec
             Aging Time   300 sec

Interface      Role  Sts Cost      Prio.Nbr  Type
-----
Et0/0          Root  FWD  100       128.1     P2p
Et0/1          Desg  FWD  100       128.2     P2p

SW2#
```

```
SW3#  
SW3#  
SW3#sh spanning-tree
```

```
VLAN0001
```

```
Spanning tree enabled protocol ieee
```

```
Root ID      Priority      32769  
             Address      aabb.cc00.0300  
             Cost        100  
             Port        1 (Ethernet0/0)  
Hello Time    2 sec    Max Age 20 sec    Forward Delay 15 sec
```

```
Bridge ID    Priority      32769 (priority 32768 sys-id-ext 1)  
             Address      aabb.cc00.0400  
Hello Time    2 sec    Max Age 20 sec    Forward Delay 15 sec  
Aging Time    300 sec
```

Interface	Role	Sts	Cost	Prio.Nbr	Type
Et0/0	Root	FWD	100	128.1	P2p
Et0/1	Desg	FWD	100	128.2	P2p

```
SW3#
```



```
SW4#
SW4#
SW4#
SW4#sh spanning-tree

VLAN0001
  Spanning tree enabled protocol ieee
  Root ID    Priority    32769
             Address     aabb.cc00.0300
             Cost        200
             Port        1 (Ethernet0/0)
             Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec

  Bridge ID   Priority    32769 (priority 32768 sys-id-ext 1)
             Address     aabb.cc00.0600
             Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec
             Aging Time   300 sec

Interface      Role Sts Cost      Prio.Nbr Type
-----
Et0/0          Root FWD 100      128.1    P2p
Et0/1          Altn BLK 100      128.2    P2p

SW4#
```