


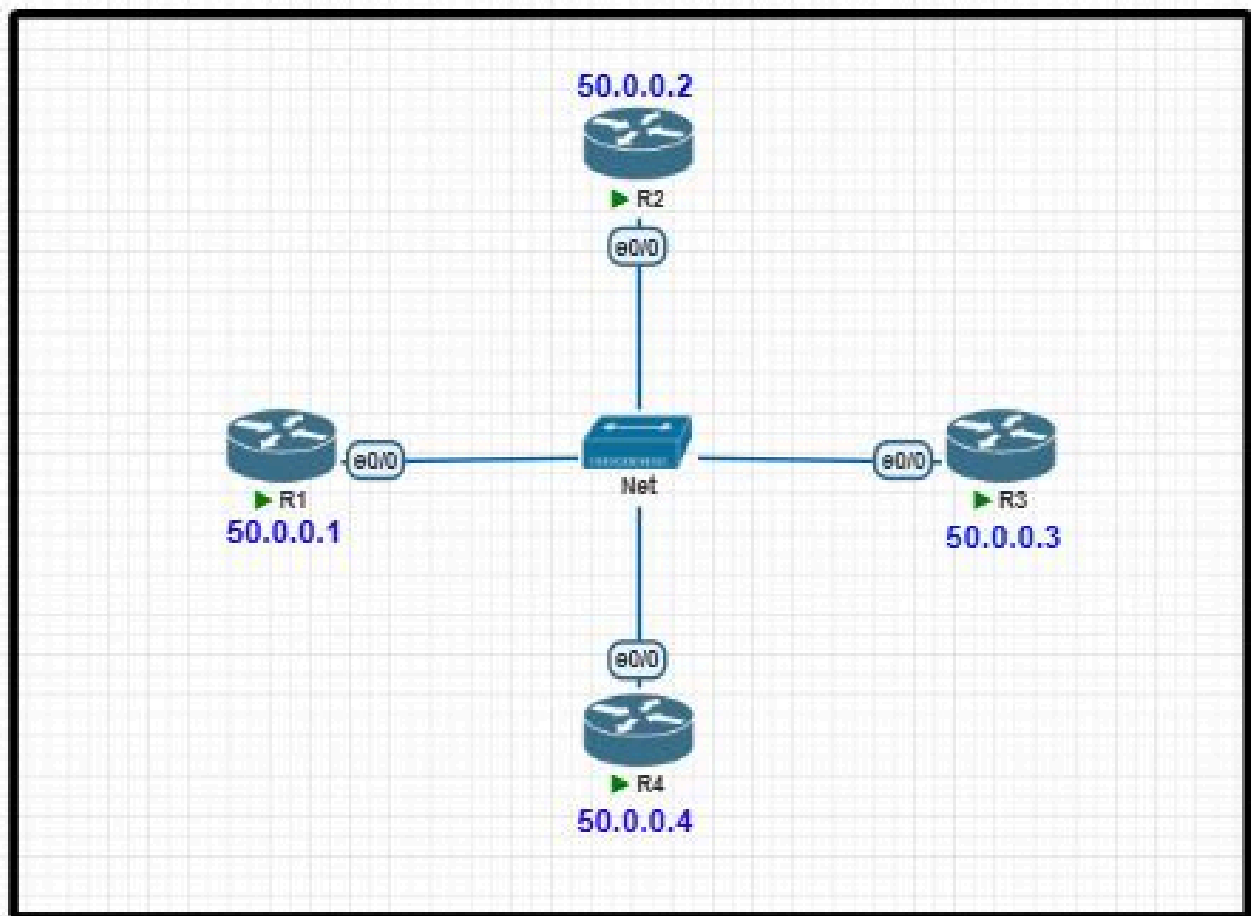

```
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#
R1#sh ip ospf neighbor

Neighbor ID      Pri   State           Dead Time   Address      Interface
2.2.2.2          1     FULL/BDR        00:00:39    50.0.0.2     Ethernet0/0
3.3.3.3          1     FULL/DROTHER    00:00:33    50.0.0.3     Ethernet0/0
4.4.4.4          1     FULL/DROTHER    00:00:32    50.0.0.4     Ethernet0/0
R1#sh ip ospf int e0/0
Ethernet0/0 is up, line protocol is up
 Internet Address 50.0.0.1/8, Area 1, Attached via Network Statement
 Process ID 1, Router ID 1.1.1.1, Network Type BROADCAST, Cost: 10
 Topology-MTID    Cost    Disabled    Shutdown    Topology Name
      0           10       no          no          Base
 Transmit Delay is 1 sec, State DR, Priority 1
 Designated Router (ID) 1.1.1.1, Interface address 50.0.0.1
 Backup Designated router (ID) 2.2.2.2, Interface address 50.0.0.2
 Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
   oob-resync timeout 40
   Hello due in 00:00:02
 Supports Link-local Signaling (LLS)
 Cisco NSF helper support enabled
 IETF NSF helper support enabled
 Index 1/1/1, flood queue length 0
 Next 0x0(0)/0x0(0)/0x0(0)
 Last flood scan length is 0, maximum is 1
 Last flood scan time is 0 msec, maximum is 1 msec
 Neighbor Count is 3, Adjacent neighbor count is 3
   Adjacent with neighbor 2.2.2.2 (Backup Designated Router)
   Adjacent with neighbor 3.3.3.3
   Adjacent with neighbor 4.4.4.4
 Suppress hello for 0 neighbor(s)
R1#
```

```

R2#
*Aug 20 15:30:49.870: %OSPF-5-ADJCHG: Process 2, Nbr 3.3.3.3 on Ethernet0/0 from L
LOADING to FULL, Loading Done
R2#
*Aug 20 15:33:22.820: %OSPF-5-ADJCHG: Process 2, Nbr 4.4.4.4 on Ethernet0/0 from L
LOADING to FULL, Loading Done
R2#
R2#
R2#
R2#
R2#
R2#sh ip ospf neighbor

Neighbor ID      Pri   State           Dead Time   Address      Interface
1.1.1.1          1     FULL/DR         00:00:39    50.0.0.1     Ethernet0/0
3.3.3.3          1     FULL/DROTHER    00:00:32    50.0.0.3     Ethernet0/0
4.4.4.4          1     FULL/DROTHER    00:00:32    50.0.0.4     Ethernet0/0
R2#sh ip ospf int e0/0
Ethernet0/0 is up, line protocol is up
  Internet Address 50.0.0.2/8, Area 1, Attached via Network Statement
  Process ID 2, Router ID 2.2.2.2, Network Type BROADCAST, Cost: 10
  Topology-MTID      Cost    Disabled    Shutdown    Topology Name
      0             10       no         no         Base
  Transmit Delay is 1 sec, State BDR, Priority 1
  Designated Router (ID) 1.1.1.1, Interface address 50.0.0.1
  Backup Designated router (ID) 2.2.2.2, Interface address 50.0.0.2
  Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
    oob-resync timeout 40
    Hello due in 00:00:07
  Supports Link-local Signaling (LLS)
  Cisco NSF helper support enabled
  IETF NSF helper support enabled
  Index 1/1/1, flood queue length 0
  Next 0x0(0)/0x0(0)/0x0(0)
  Last flood scan length is 1, maximum is 1
  Last flood scan time is 0 msec, maximum is 1 msec
  Neighbor Count is 3, Adjacent neighbor count is 3
    Adjacent with neighbor 1.1.1.1 (Designated Router)
    Adjacent with neighbor 3.3.3.3
    Adjacent with neighbor 4.4.4.4
  Suppress hello for 0 neighbor(s)
R2#

```

```

R3
1.1.1.1      1    FULL/DR      00:00:38    50.0.0.1    Ethernet0/0
2.2.2.2      1    FULL/BDR      00:00:39    50.0.0.2    Ethernet0/0
R3#
*Aug 20 15:32:52.948: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R3#
R3#
R3#
R3#
R3#
R3#
R3#
R3#sh ip ospf neighbor

Neighbor ID      Pri   State           Dead Time   Address      Interface
1.1.1.1          1     FULL/DR         00:00:32    50.0.0.1     Ethernet0/0
2.2.2.2          1     FULL/BDR         00:00:33    50.0.0.2     Ethernet0/0
4.4.4.4          1     2WAY/DROTHER    00:00:35    50.0.0.4     Ethernet0/0
R3#sh ip ospf int e0/0
Ethernet0/0 is up, line protocol is up
  Internet Address 50.0.0.3/8, Area 1, Attached via Network Statement
  Process ID 3, Router ID 3.3.3.3, Network Type BROADCAST, Cost: 10
  Topology-MTID      Cost      Disabled      Shutdown      Topology Name
    0                10        no            no            Base
  Transmit Delay is 1 sec, State DROTHER, Priority 1
  Designated Router (ID) 1.1.1.1, Interface address 50.0.0.1
  Backup Designated router (ID) 2.2.2.2, Interface address 50.0.0.2
  Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
    oob-resync timeout 40
    Hello due in 00:00:08
  Supports Link-local Signaling (LLS)
  Cisco NSF helper support enabled
  IETF NSF helper support enabled
  Index 1/1/1, flood queue length 0
  Next 0x0(0)/0x0(0)/0x0(0)
  Last flood scan length is 0, maximum is 1
  Last flood scan time is 0 msec, maximum is 0 msec
  Neighbor Count is 3, Adjacent neighbor count is 2
    Adjacent with neighbor 1.1.1.1 (Designated Router)
    Adjacent with neighbor 2.2.2.2 (Backup Designated Router)
  Suppress hello for 0 neighbor(s)
R3#

```



```
R4
IETF NSF helper support enabled
Index 1/1/1, flood queue length 0
Next 0x0(0)/0x0(0)/0x0(0)
Last flood scan length is 0, maximum is 1
Last flood scan time is 0 msec, maximum is 0 msec
Neighbor Count is 3, Adjacent neighbor count is 2
  Adjacent with neighbor 1.1.1.1 (Designated Router)
  Adjacent with neighbor 2.2.2.2 (Backup Designated Router)
Suppress hello for 0 neighbor(s)
R4#
R4#
R4#
R4#sh ip ospf neighbor

Neighbor ID      Pri   State           Dead Time   Address      Interface
1.1.1.1          1    FULL/DR         00:00:37    50.0.0.1     Ethernet0/0
2.2.2.2          1    FULL/BDR        00:00:36    50.0.0.2     Ethernet0/0
3.3.3.3          1    2WAY/DROTHER    00:00:39    50.0.0.3     Ethernet0/0
R4#sh ip ospf int e0/0
Ethernet0/0 is up, line protocol is up
  Internet Address 50.0.0.4/8, Area 1, Attached via Network Statement
  Process ID 4, Router ID 4.4.4.4, Network Type BROADCAST, Cost: 10
  Topology-MTID    Cost    Disabled    Shutdown    Topology Name
    0              10      no          no          Base
  Transmit Delay is 1 sec, State DROTHER, Priority 1
  Designated Router (ID) 1.1.1.1, Interface address 50.0.0.1
  Backup Designated router (ID) 2.2.2.2, Interface address 50.0.0.2
  Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
    oob-resync timeout 40
    Hello due in 00:00:01
  Supports Link-local Signaling (LLS)
  Cisco NSF helper support enabled
  IETF NSF helper support enabled
  Index 1/1/1, flood queue length 0
  Next 0x0(0)/0x0(0)/0x0(0)
  Last flood scan length is 0, maximum is 1
  Last flood scan time is 0 msec, maximum is 0 msec
  Neighbor Count is 3, Adjacent neighbor count is 2
    Adjacent with neighbor 1.1.1.1 (Designated Router)
    Adjacent with neighbor 2.2.2.2 (Backup Designated Router)
  Suppress hello for 0 neighbor(s)
R4#
```