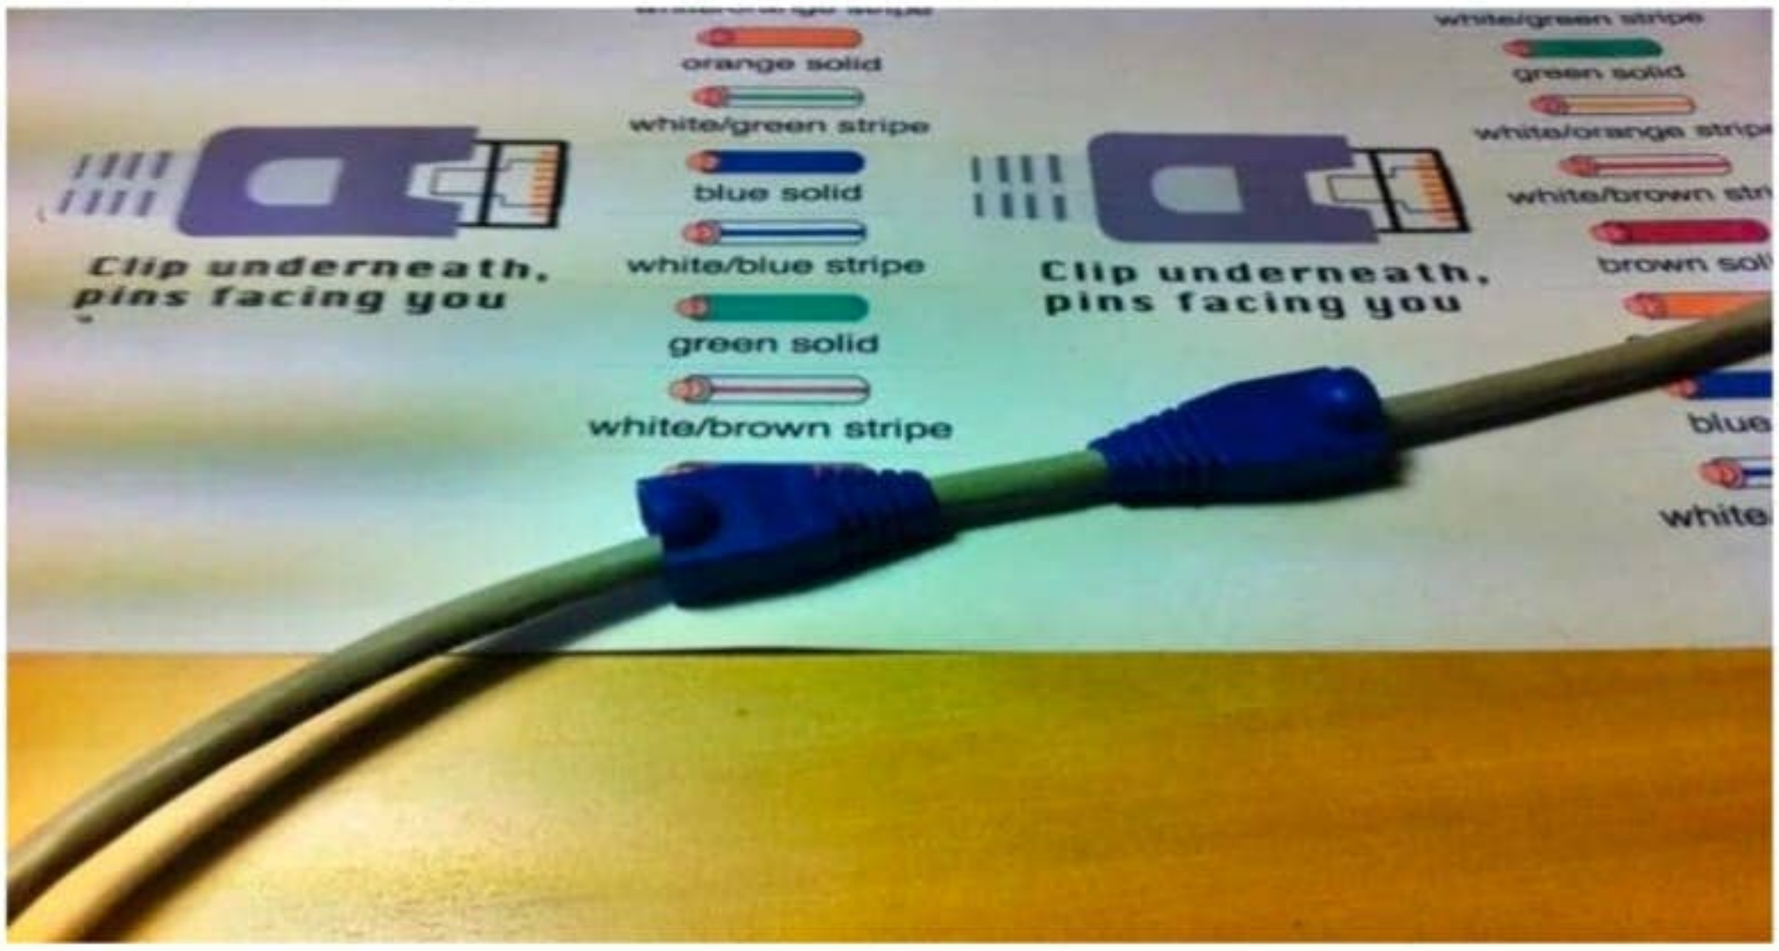
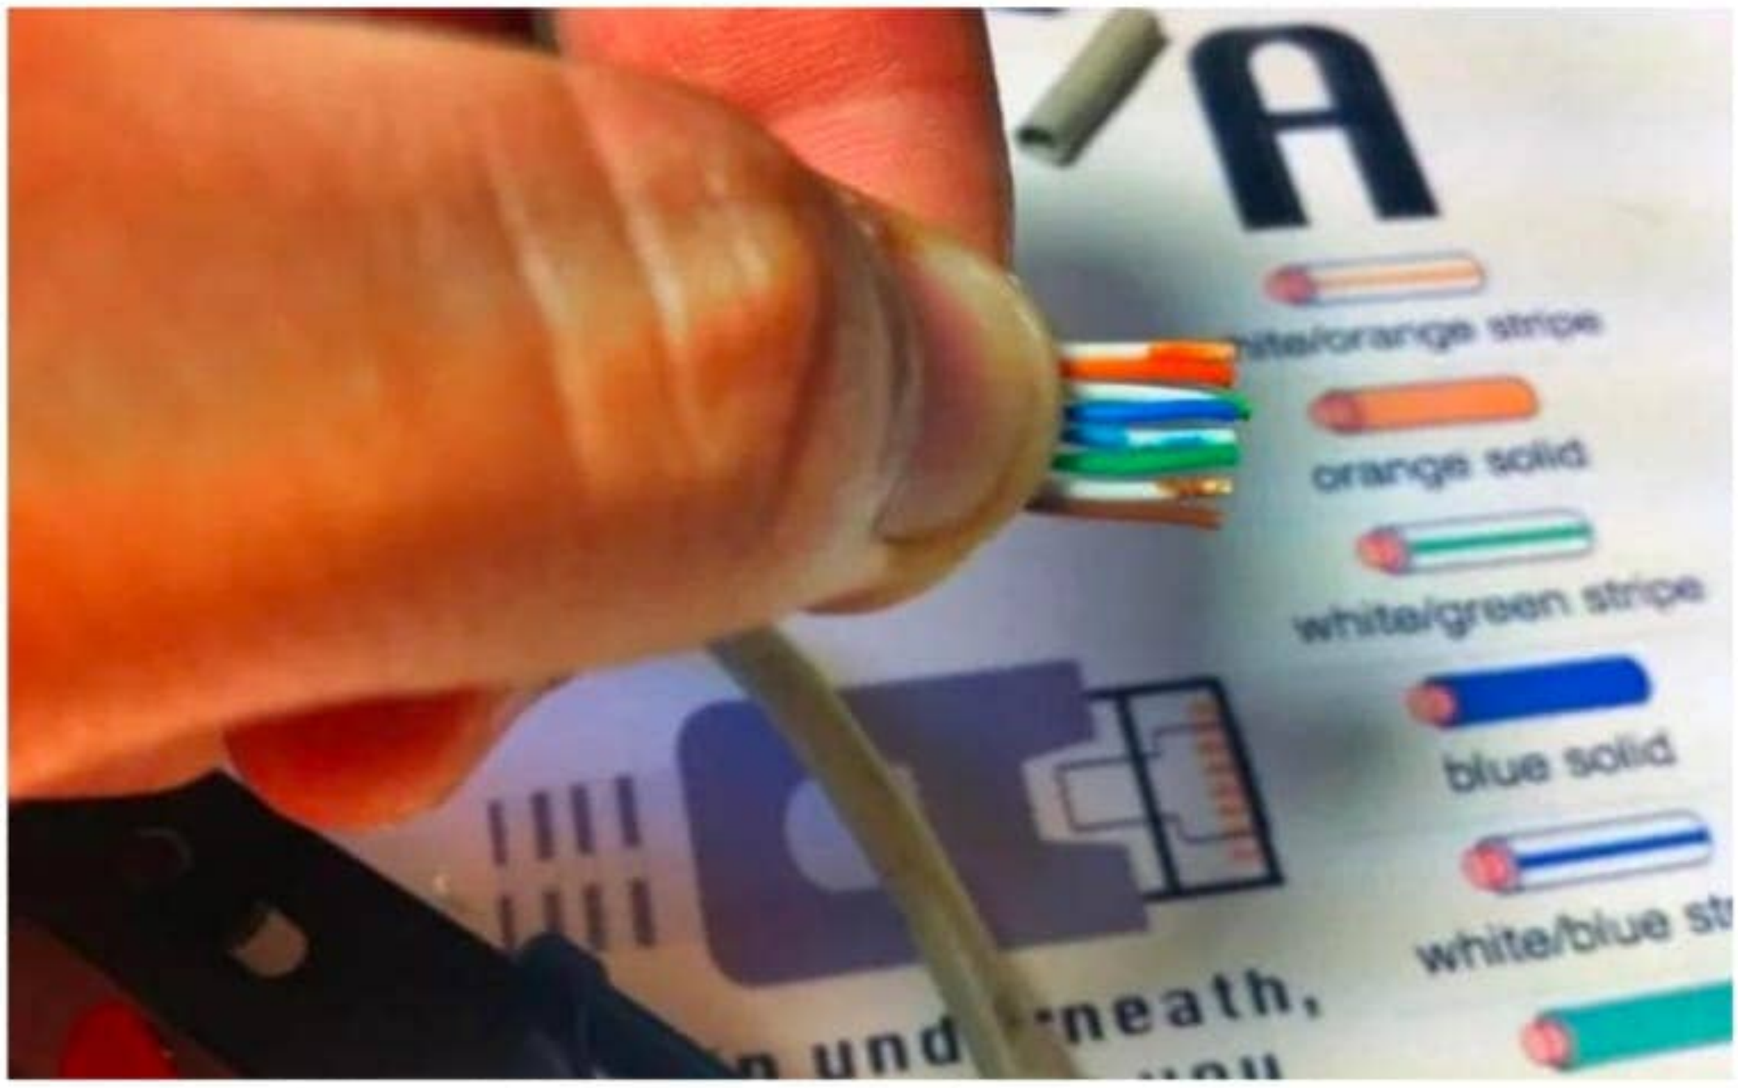
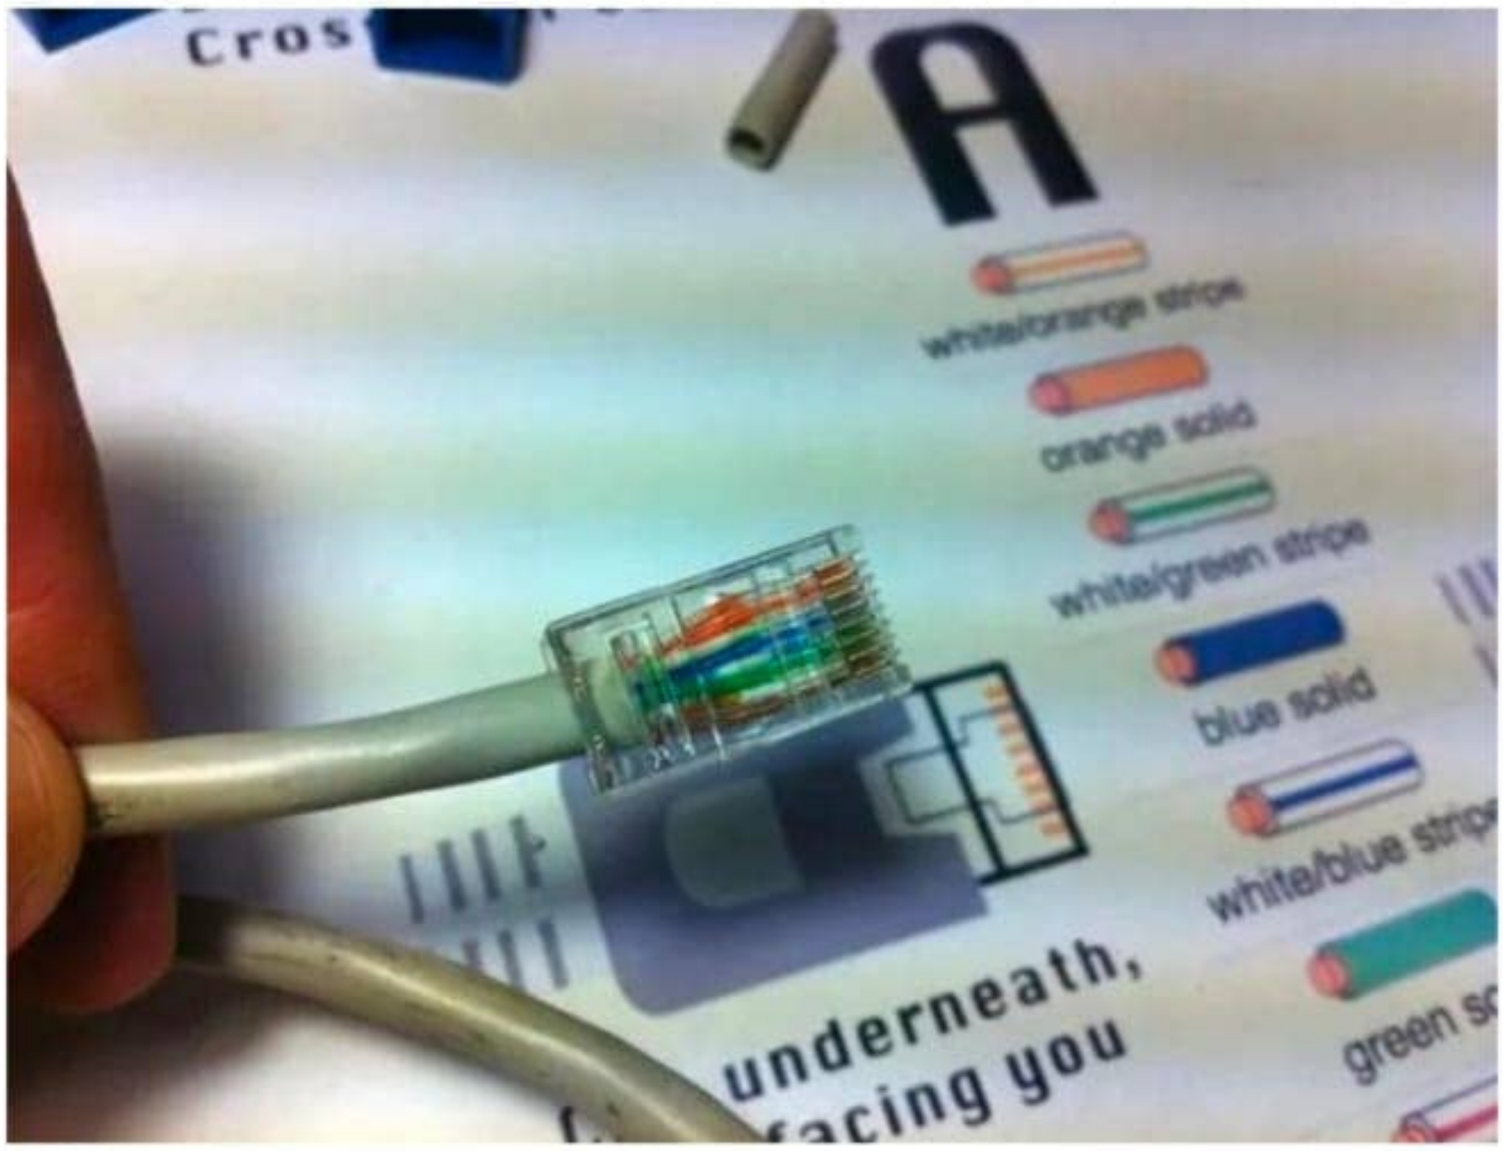
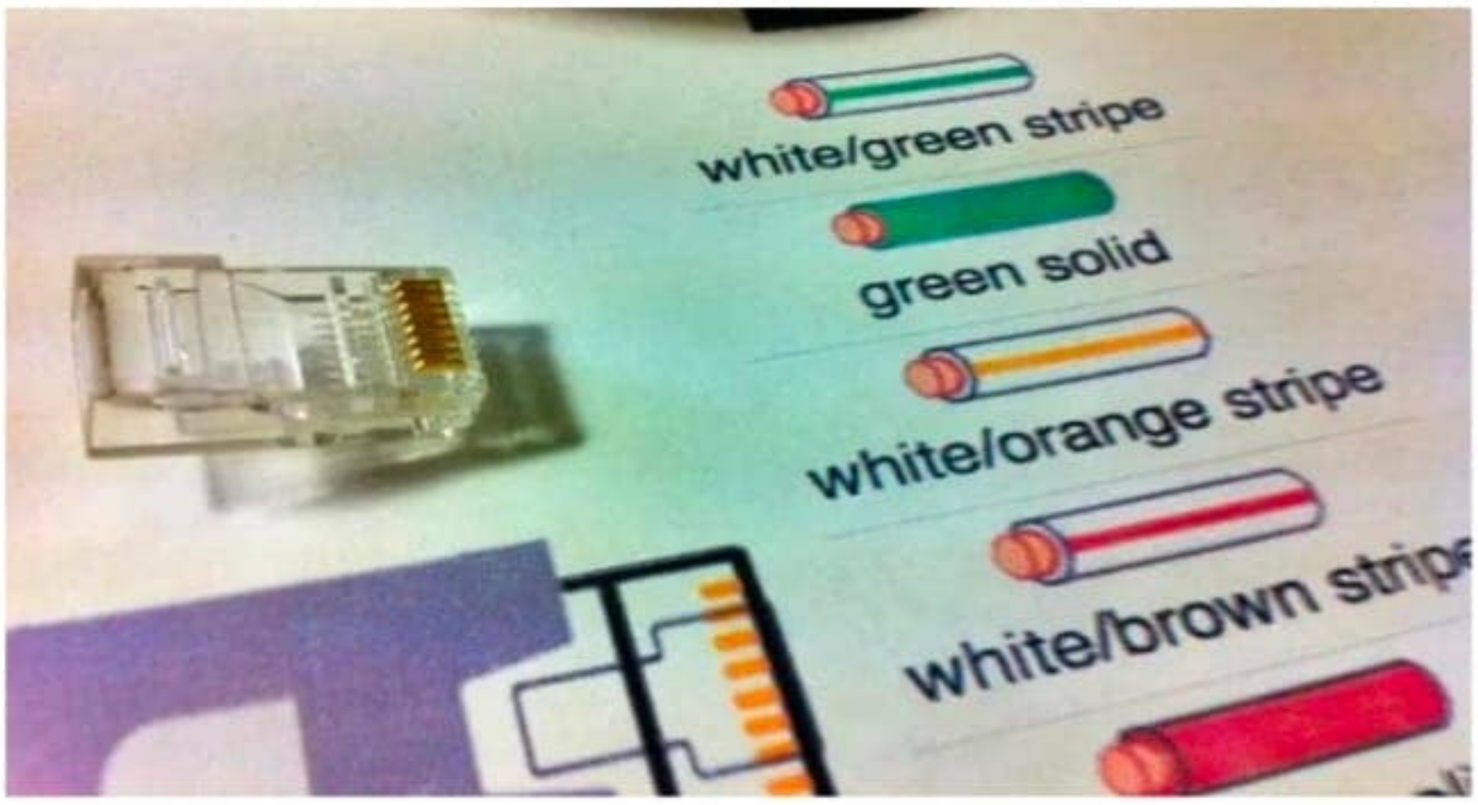
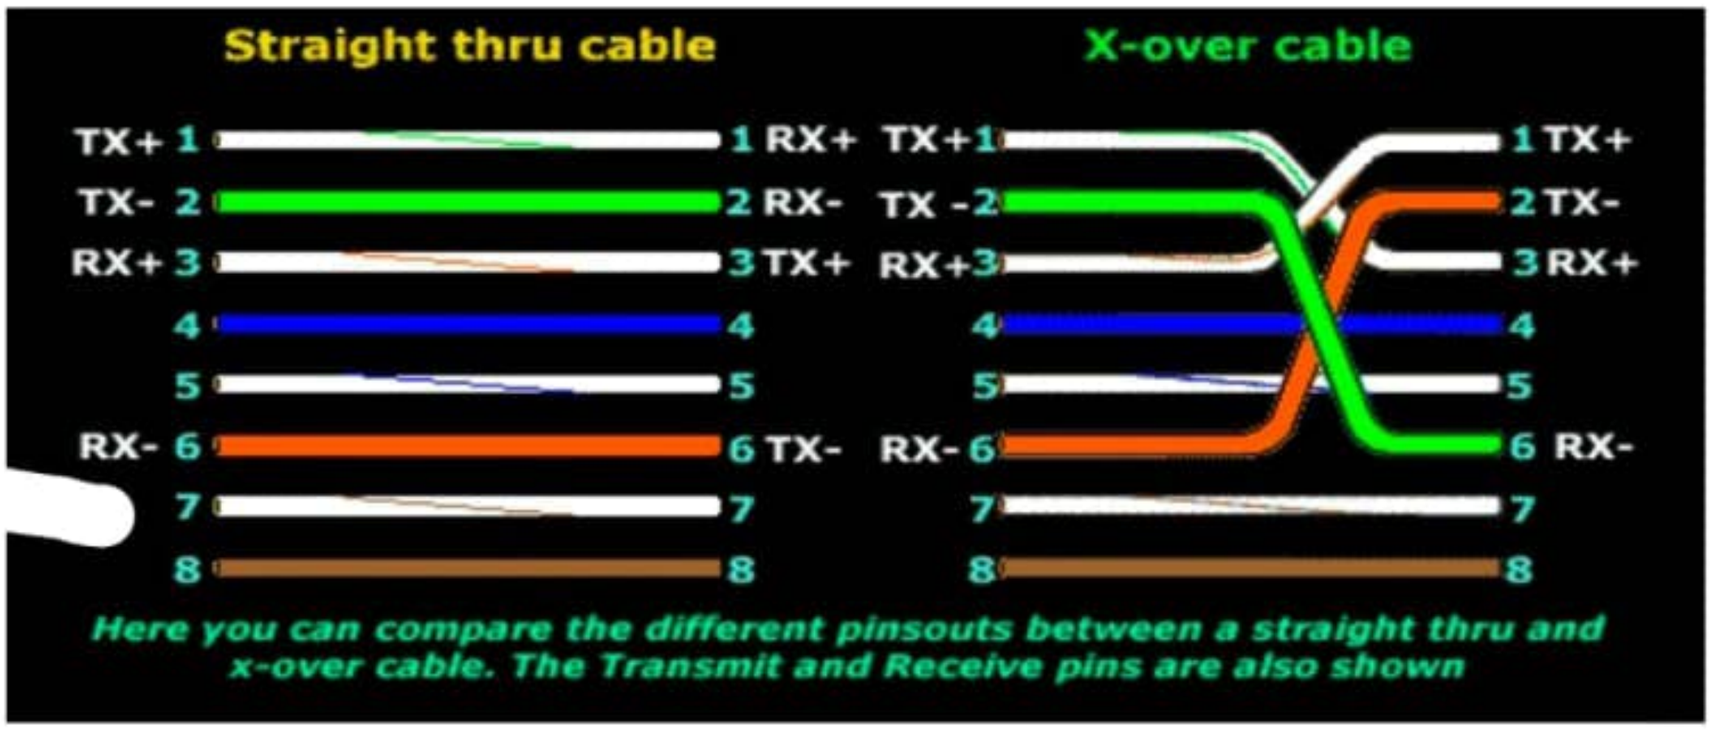

orange solid
white/green stripe
blue solid
white/blue stripe
green solid
white/brown stripe
Clip underneath,
pins facing you
Clip underneath,
pins facing you
green solid
brown soli
blue
white


network cable: both sides should be A
One side A, one side B
A
B
Clip underneath,
pins facing you


A
orange solid
white/green stripe
blue solid
white/blue st
neath,


A
white/orange stripe
orange solid
white/green stripe
blue solid
white/blue stripe
underneath,
facing you


white/green stripe
green solid
white/orange stripe
white/brown stripe


Straight thru cable
X-over cable
TX+ 1 1 RX+
TX- 2 2 RX-
RX+ 3 3 TX+
4 4
5 5
RX- 6 6 TX-
7 7
8 8
TX+1 1 TX+
TX -2 2 TX-
RX+3 3 RX+
4 4
5 5
RX- 6 6 RX-
7 7
8 8
Here you can compare the different pinsouts between a straight thru and x-over cable. The Transmit and Receive pins are also shown