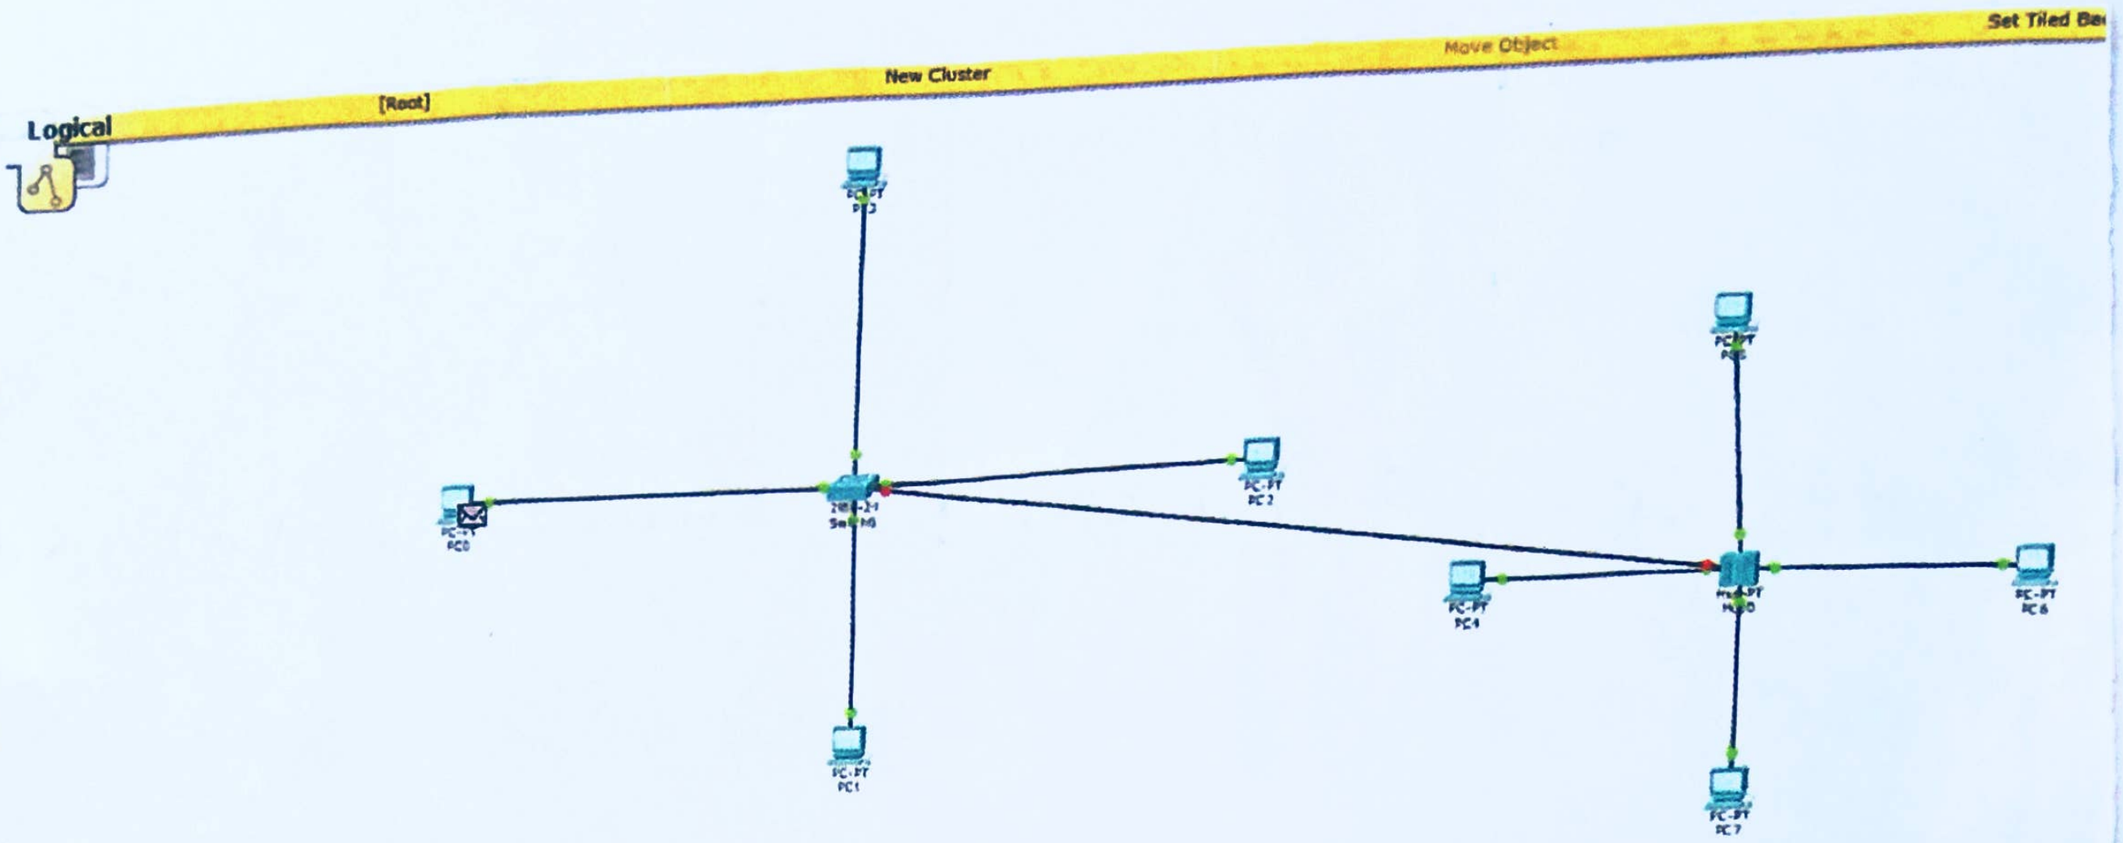


PC0

IP Configuration

IP Configuration

DHCP Static

IP Address	10.1.1.1
Subnet Mask	255.0.0.0
Default Gateway	
DNS Server	

PC1

IP Configuration

IP Configuration

DHCP Static

IP Address	10.1.1.2
Subnet Mask	255.0.0.0
Default Gateway	
DNS Server	

DATE: 23-07-26

HUB and SWITCH

AIM:-

To compare the packet forwarding behavior of a Hub and a Switch using Cisco Packet Tracer.

STEPS:-

=> Create one network using a Hub and another using a Switch, each connected to 4 PCs.

=> Configure IP addresses for all PCs in both networks.

=> Send a simple PDU between two PCs in each network.

=> Observe packet transmission in simulation mode.

=> Compare how the hub and switch forward packet.

RESULT:-

The hub broadcasts packets to all connected devices, whereas the switch forwards packets only to the intended destination. Therefore, the switch provides better performance, reduced network traffic, and improved efficiency compared to the hub.