Command Prompt

```
Packet Tracer PC Command Line 1.0
PC>ping 192.168.30.1

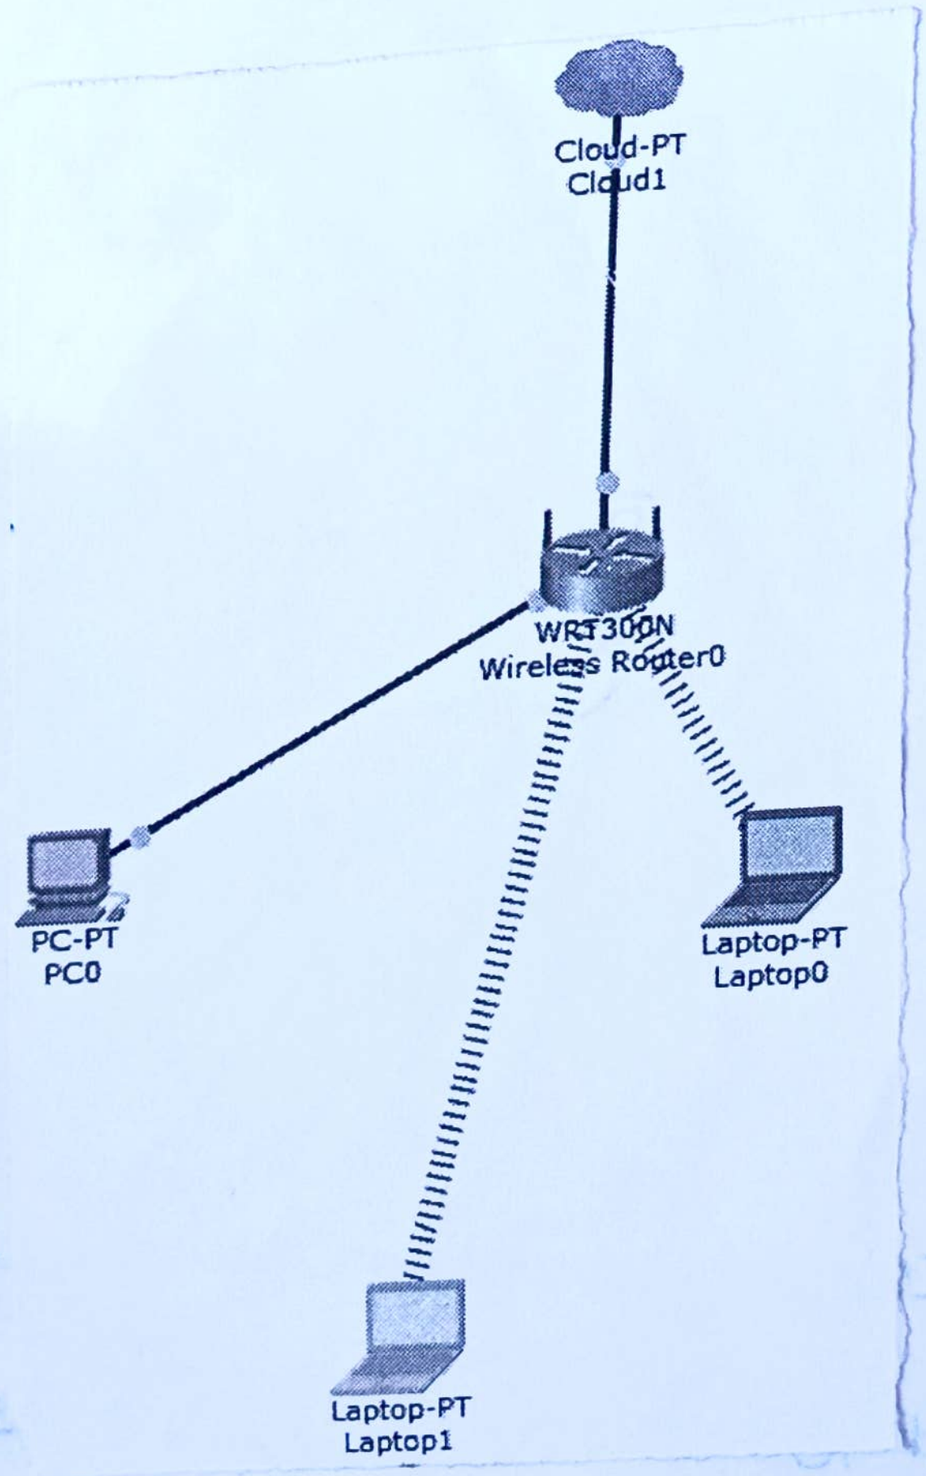
Pinging 192.168.30.1 with 32 bytes of data:

Reply from 192.168.30.1: bytes=32 time=0ms TTL=255
Reply from 192.168.30.1: bytes=32 time=1ms TTL=255
Reply from 192.168.30.1: bytes=32 time=0ms TTL=255
Reply from 192.168.30.1: bytes=32 time=0ms TTL=255

Ping statistics for 192.168.30.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

PC>
```

PC-PT
PC1



Ex.NO:10.b)

Wireless Router with DHCP server and Internet cloud.

AIM:-

To design and configure and internetwork using a wireless router, DHCP server and Internet cloud in cisco packet tracer.

ALGORITHM/PROCEDURE:-

1) Open cisco packet tracer.

2) place and cloud-PT, one WRT300N wireless Router, one PC and two example laptops.

3) Connect the cloud-PI to the Internet/WAN port of the WRT300N using a copper straigh-Through cable.

4) Connect the PC to a LAN port of the WRT300N using a copper straigh-through cable.

5) Install a wireless interface such as WPC300N in the laptops if required.

6) Enable the DHCP server in the wireless router.

7) Connect the laptops to the wireless network of the WRT300N.

8) Verify that the devices have received IP address automatically.

9) Use the ping command to test connectivity between the devices.

10) Use simulation Mode to observe the packet transmission through the wireless router.

```
        --- System Configuration Dialog ---

Continue with configuration dialog? [yes/no]: no

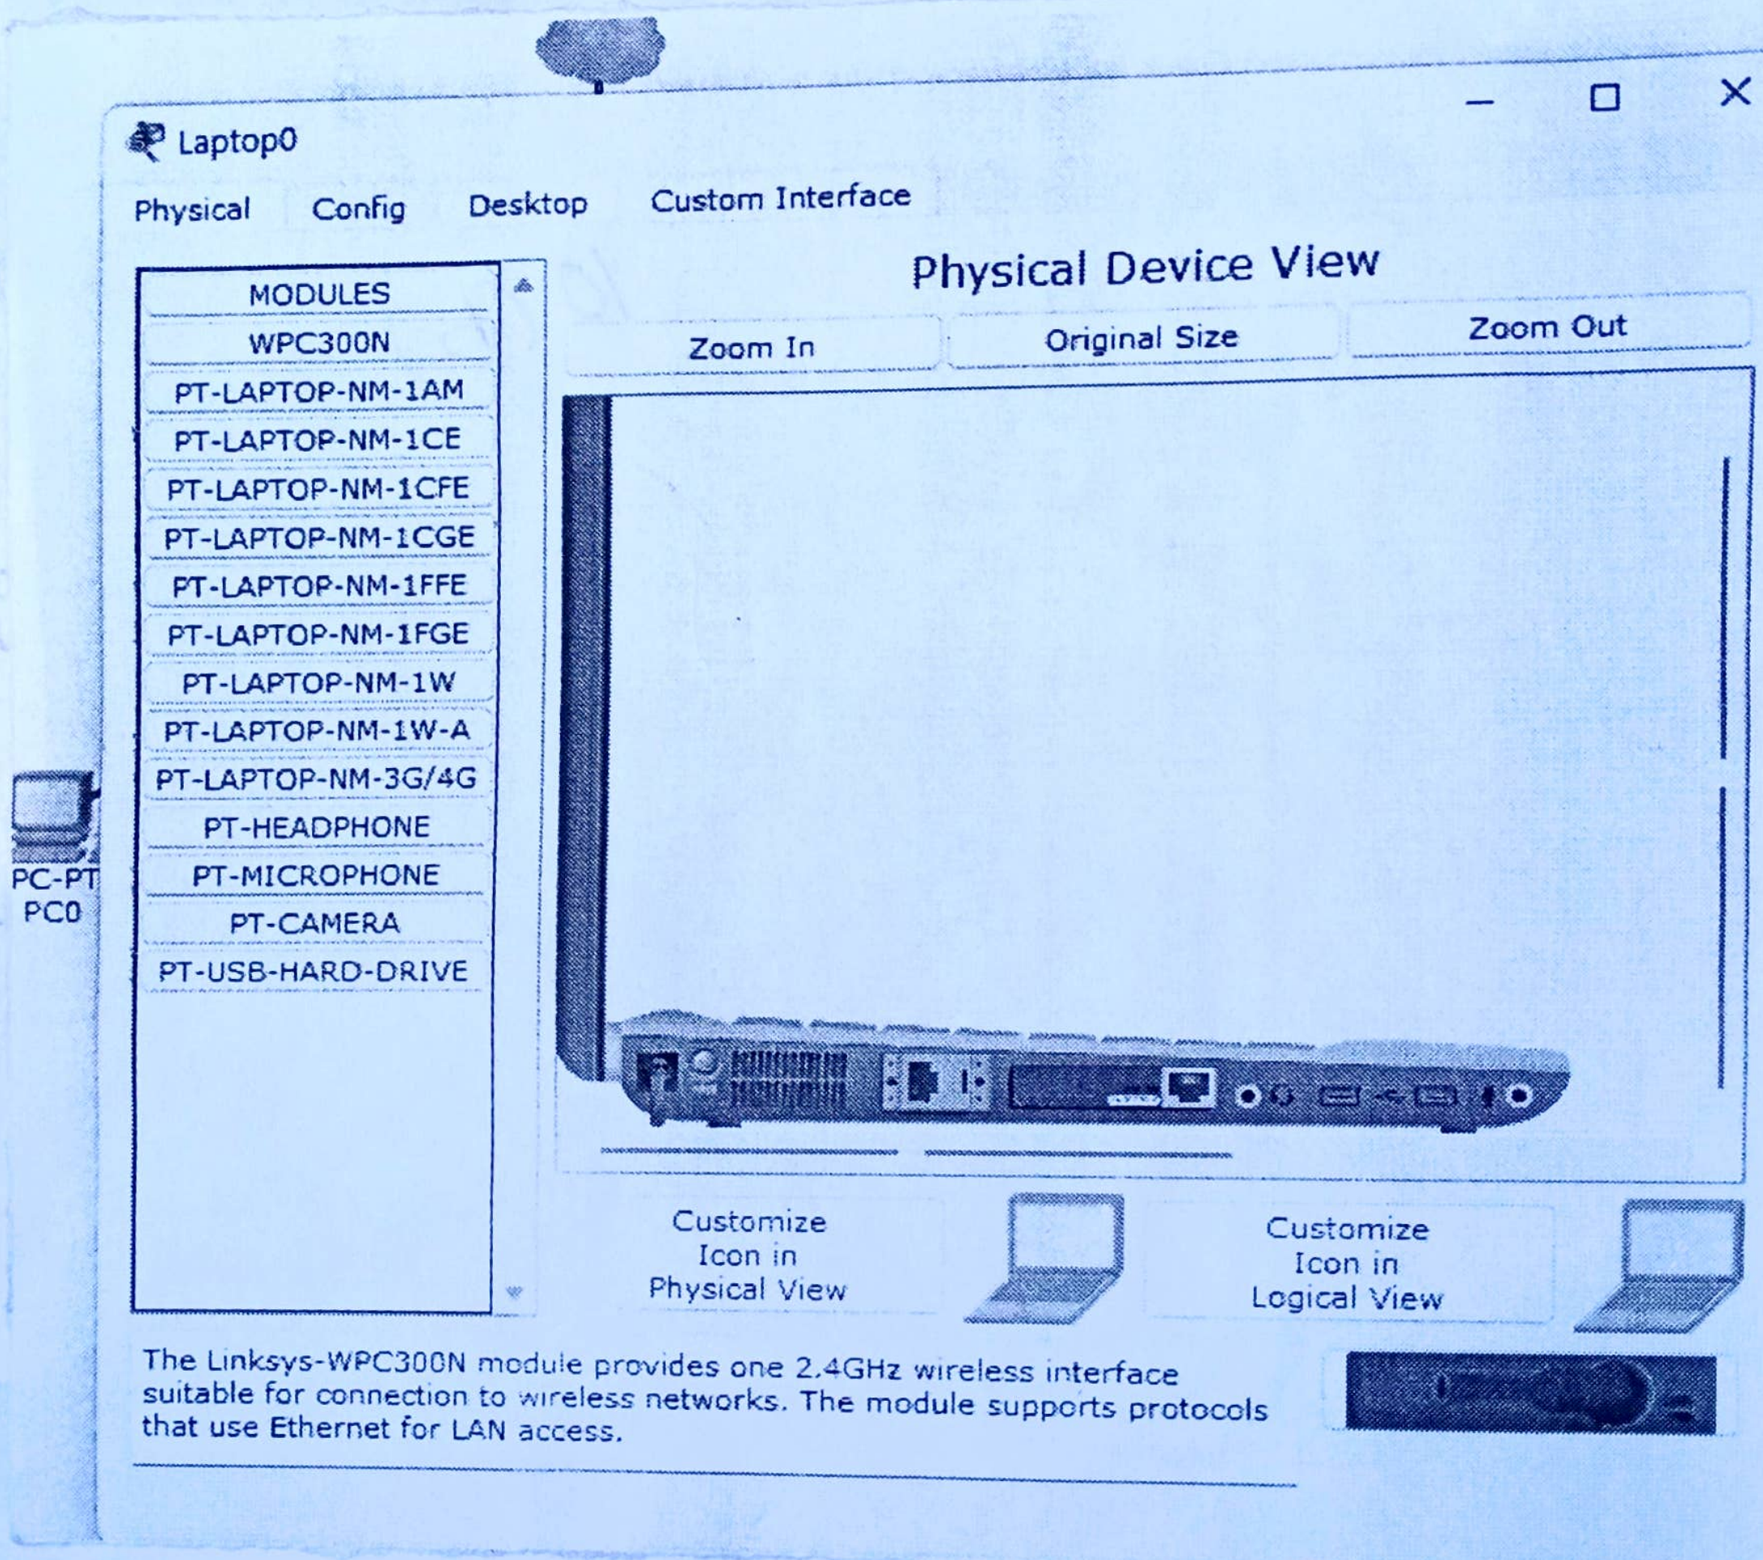

Press RETURN to get started!



Router>enable
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface gigabitethernet 0/0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state
to up
exit
```



RESULT :-

The internetwork using a wireless router, DHCP server and Internet cloud was successfully designed and configured. The devices obtained IP address automatically through DHCP, and communication.