in Cisco Packet Tracer Simulation.


a) Simple Internetwork using a Router.


AIM:


To design and configure a simple internetwork using a router in cisco Packet Tracer and observe the routing of packets between different networks.

ALGORITHM / PROCEDURE:

1) Open cisco packet Tracer.
2) place one Cisco 2911 Router, two switches and 3-4 pcs for each network.
3) Connect the PCs to the switches to the router using Ethernet cables.
4) Connect the switches to the router using Ethernet cables.
5) Assign static IP addresses to all PCs and router interfaces.
6) Configure the router interfaces using the assigned IP addresses.
7) Enable the router interfaces using the no shutdown command.
8) verify the interface status using show ip interface brief.
9) use simple PDU or the ping command to send a packet from one network to another.

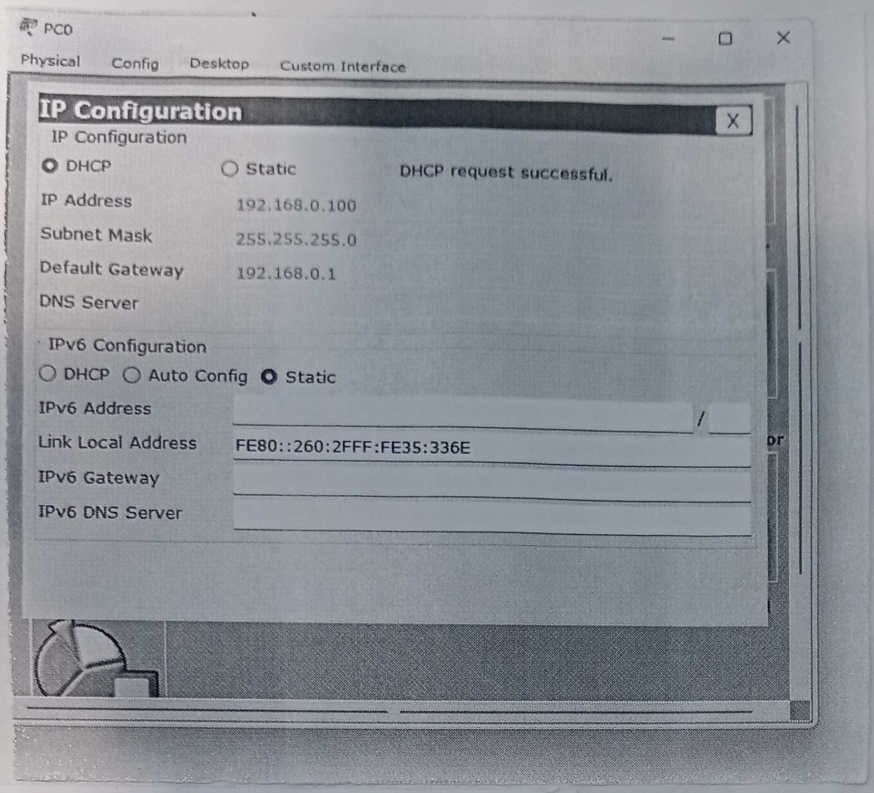

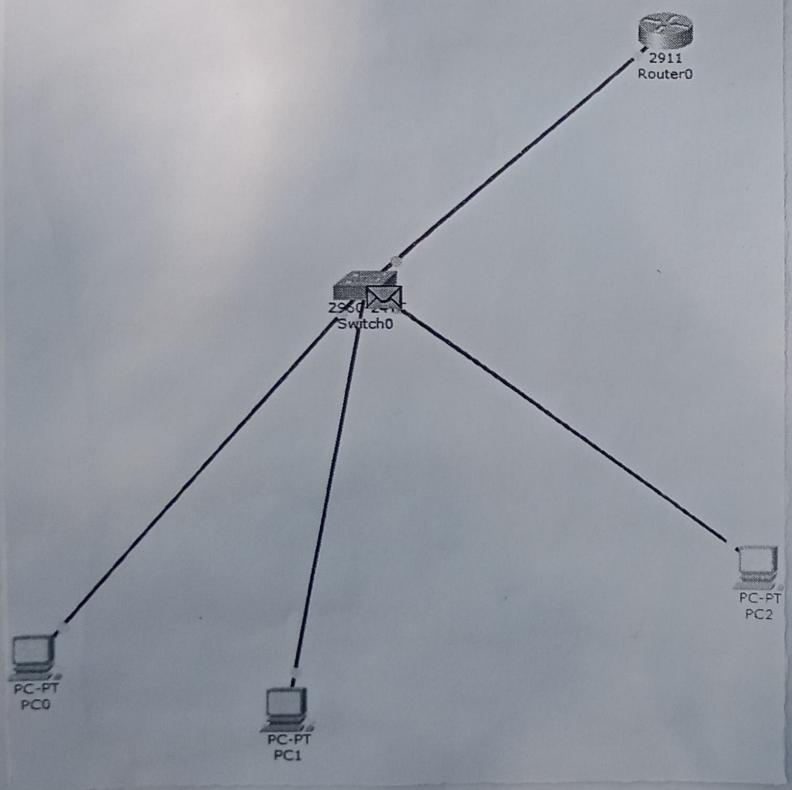

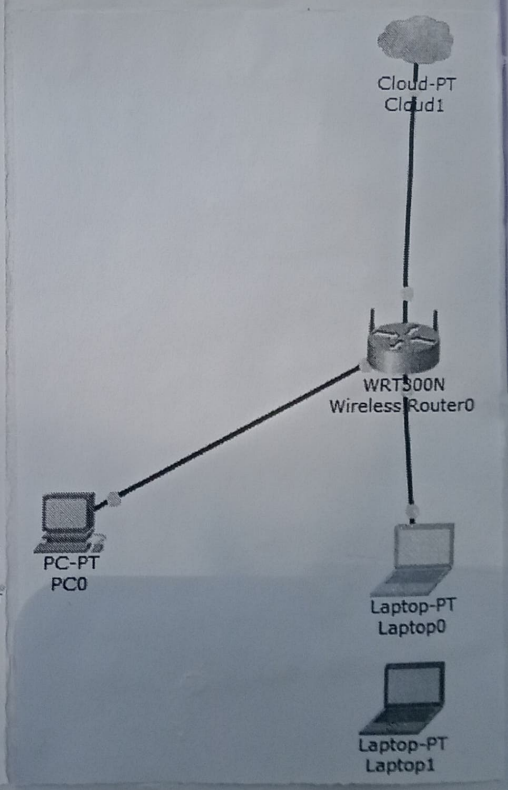

a) Simple

AIM:

To desi
router
of pac

ALGORIT

1) Open

2) plac
for each

3) Connec
Ethern

4) Connec
Cables

5) Assig
interfa

6) Confi
IP ad

7) Enabl
Comm

8) Verif
brief


9) use
fro

10) Select Simulation Mode and observe the packet the go travelling through the switches and router.

11) Observe that the router forwards the packet through the appropriate interface according to the destination network.

RESULT:

The simple internetwork was successfully designed and configured using a router in cisco packet Tracer. Packet transmission and routing between different networks were successfully observed.

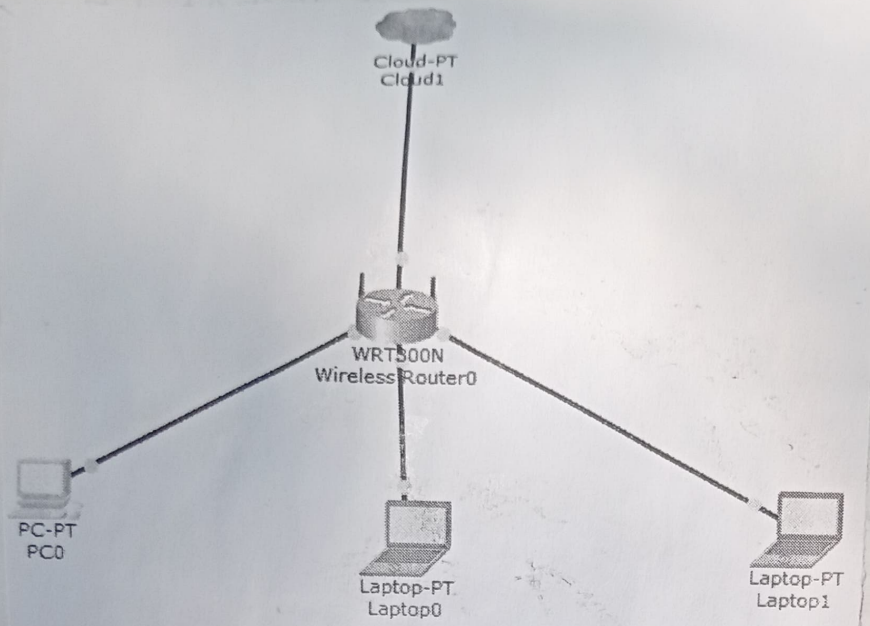


```
Router(config)#interface gigabitethernet 0/1
Router(config-if)#ip address 192.168.20.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state
to up
exit
```

```
Router#enable
Router#show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
GigabitEthernet0/0     192.168.10.1    YES manual up                    up
GigabitEthernet0/1     192.168.20.1    YES manual up                    up
GigabitEthernet0/2     unassigned      YES unset  administratively down down
Vlan1                  unassigned      YES unset  administratively down down
Router#
```

Copy Paste