23/7/26 UNDERSTANDING THE CISCO PACKET TRACER ENVIRONMENT

AIM:

To understanding the Cisco packet tracer environment and design a simple computer network using its interface and networking components.

STEPS:

- Open the Cisco packet Tracer application.
- observe the user interface, including the menu Bar, Main Toolbar, workspace, common Tools Bar, network component Box, and Realtime / Simulation tabB.
- From the network component Box, select the required network devices such as PCs, Hub and switch.
- Drag and drop the devices into the workspace.
- Connect the devices using copper straigh-Through cables.
- Configure IP addresses for the PCs using the Desktop → IP configuration option.
- verify that all links are active (green LED).
- use the Add simple PDU tool to send a packet between two PCs.
- observe packet transmission in Real time mode and Simulation mode.

• Save the network topology.

RESULT::

The Cisco packet tracer environment was successfully explored, and a simple network was designed. The interface components, device connections, IP configura and packet transmission were successfully understood using both Realtime and simulation modes.

Ex: 3b)
Date:
23/7/26


HUB

AIM:

To study the behavior of a Hub by observing how it forwards data packets using cisco packet tracer.

STEPS:

- Open Cisco packet tracer.
- Drag and place 1 Hub and 4 Generic PCs into the workspace.
- Connect all PCs to the Hub using copper Straigh-Through cables.
- Configure IP addresses for all PCs in the same network.
- Select Add Simple PDU from the Common tools bar.
- Send a packet from one PC (Source) to another PC (dishination).
- Switch to Simulation mode and observe how the hub forwards the packet.

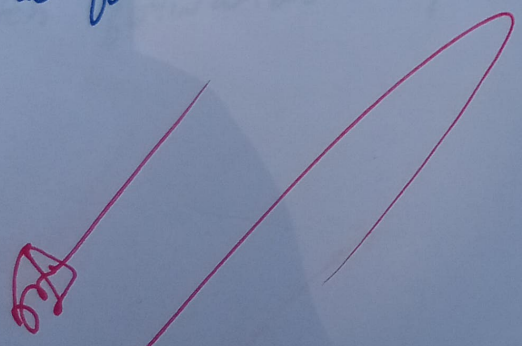

RESULT:

The hub broadcasts the received packet to all connected devices. Every PC receives the packet, but only the destination PC accepts it, while the others discard it.

