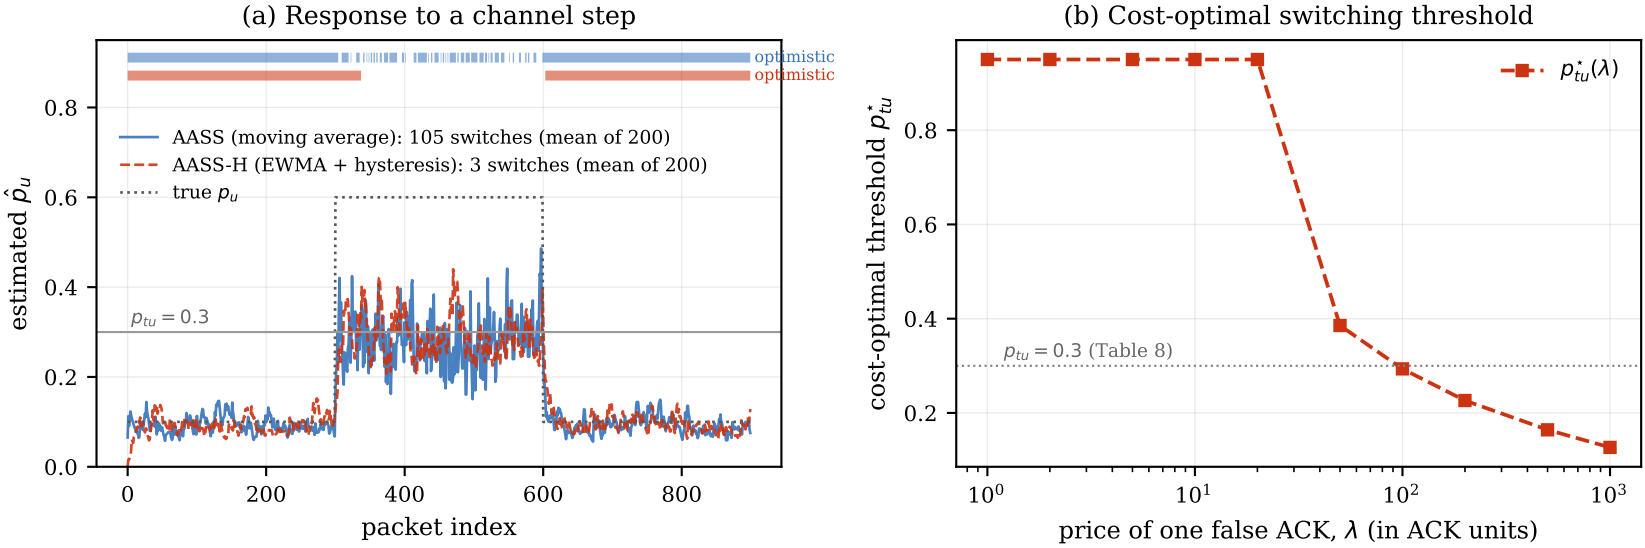

(a) Response to a channel step
optimistic
optimistic
AASS (moving average): 105 switches (mean of 200)
AASS-H (EWMA + hysteresis): 3 switches (mean of 200)
true p_u
$p_{tu} = 0.3$
estimated $\hat{p}_u$
packet index
0.0
0.2
0.4
0.6
0.8
0
200
400
600
800
(b) Cost-optimal switching threshold
$p^\star_{tu}(\lambda)$
$p_{tu} = 0.3$ (Table 8)
cost-optimal threshold $p^\star_{tu}$
price of one false ACK, λ (in ACK units)
0.2
0.4
0.6
0.8
10^0
10^1
10^2
10^3