

ACME Fan Coil Unit — Model FCU-400 Series

The FCU-400 series delivers quiet, high-efficiency hydronic cooling and heating for commercial fit-outs. All models share a common cabinet and differ in coil depth and motor size. Units are ETL listed and ship fully charged and run-tested.

Parameter	FCU-400-A	FCU-400-B	FCU-400-C
Nominal Airflow	400 CFM	600 CFM	800 CFM
Cooling Capacity	12.0 MBH	18.5 MBH	24.0 MBH
Voltage	115 V	115 V	208 V
FLA	1.2 A	1.8 A	2.4 A
Width	24"	30"	36"

Capacities rated at 45°F entering water, 80°F/67°F entering air per AHRI 440.

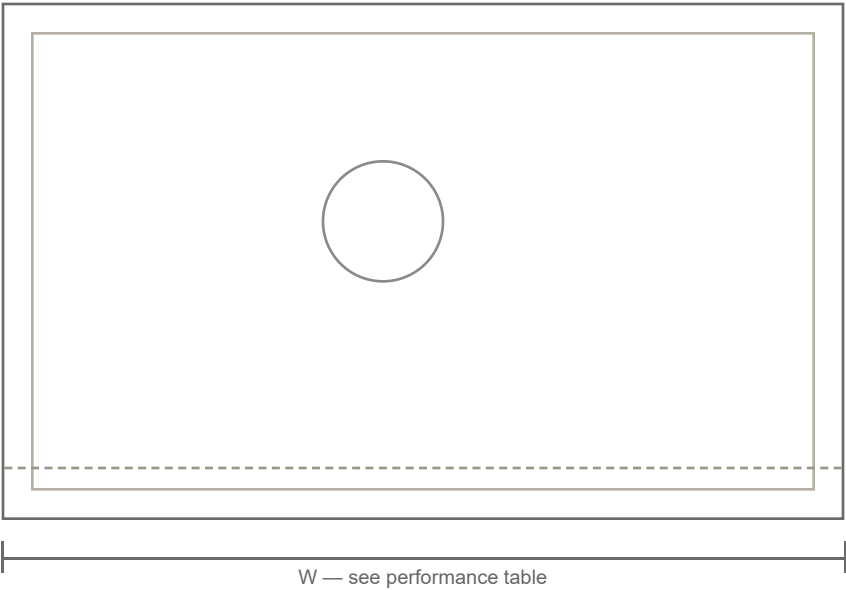


Fig. 1 — FCU-400 cabinet, plan view

All dims in inches. Service clearance 18" front.

Electrical & Connection Data

Property	Value
Supply Connection	3/4" NPT
Return Connection	3/4" NPT
Condensate	7/8" OD
MCA	3.0 A
MOCP	15 A

Note: all units ship with a factory-mounted disconnect. Field wiring must comply with NEC and local codes. MCA/MOCP shown apply to all FCU-400 models.

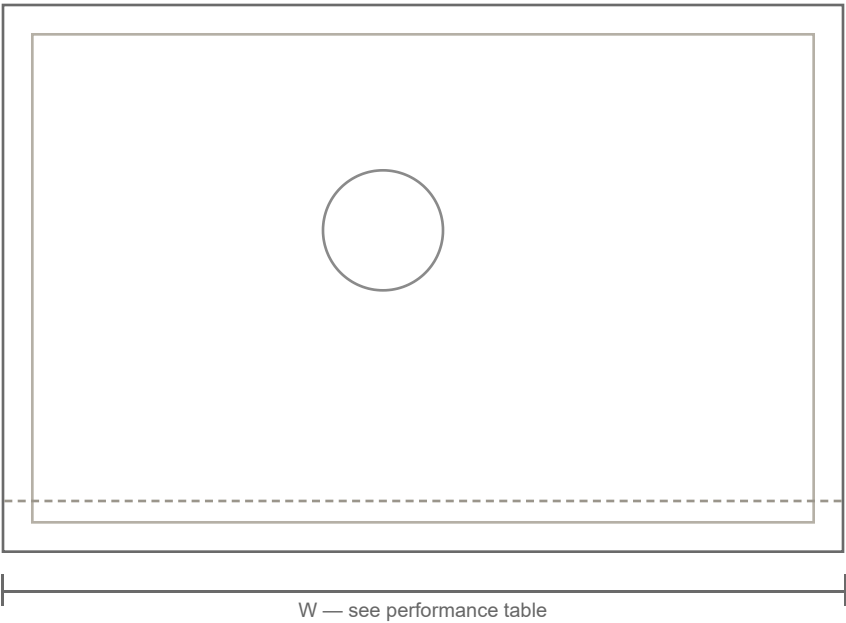


Fig. 2 — Typical wiring, single-point power

All dims in inches. Service clearance 18" front.

Physical & Sound Data

Physical data below is listed per model. Sound power applies to all models at nominal airflow.

Model	ESP (in. wg)	Motor HP	Op. Weight	Water Conn.
FCU-400-A	0.30	1/6	92 lb	3/4"
FCU-400-B	0.50	1/4	110 lb	3/4"
FCU-400-C	0.50	1/3	128 lb	1"

Octave band	125 Hz	250 Hz	500 Hz	1 kHz
Sound power (Lw)	52	48	45	41
Test condition	All bands re 10 ⁻¹² W, measured per AHRI 260 — applies to every FCU-400 model			

Weights are dry weights. Add 8 lb per unit for water charge.

